


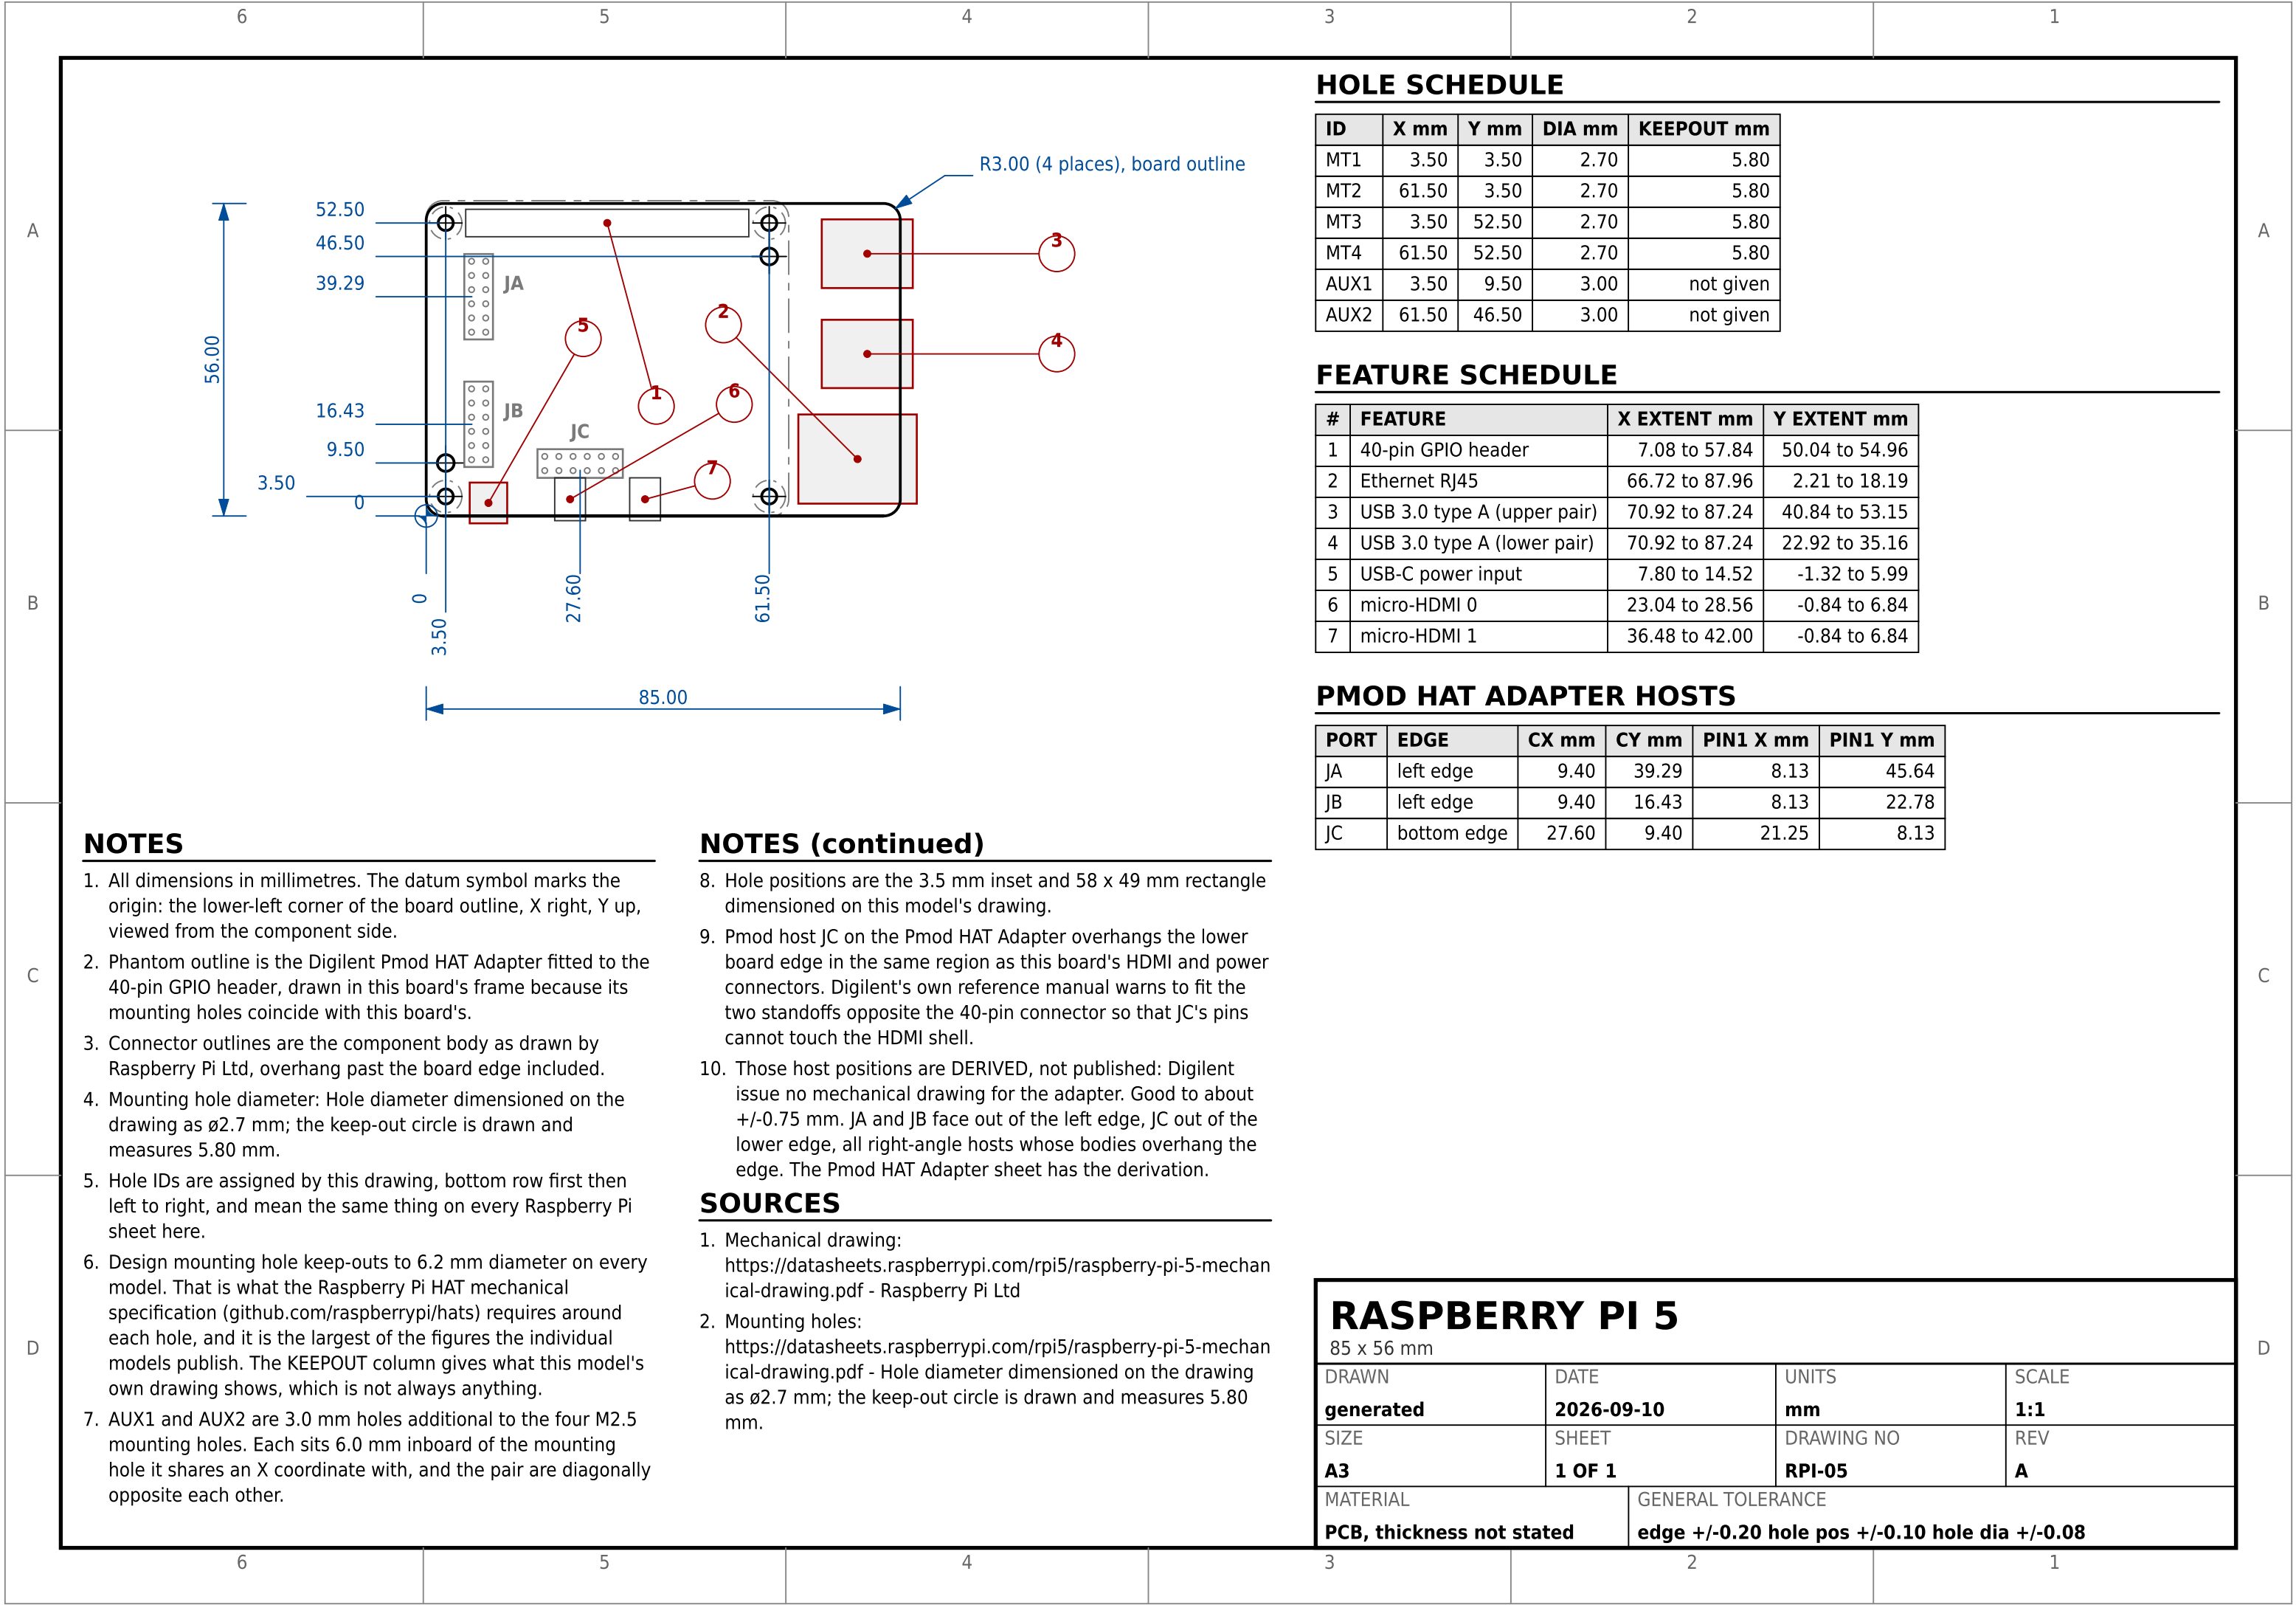

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
3. Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
4. Mounting hole diameter: Hole diameter dimensioned on the drawing as $\varnothing 2.7$ mm; the keep-out circle is drawn and measures 5.80 mm.
5. Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.
6. Design mounting hole keep-outs to 6.2 mm diameter on every model. That is what the Raspberry Pi HAT mechanical specification (github.com/raspberrypi/hats) requires around each hole, and it is the largest of the figures the individual models publish. The KEEPOUT column gives what this model's own drawing shows, which is not always anything.
7. AUX1 and AUX2 are 3.0 mm holes additional to the four M2.5 mounting holes. Each sits 6.0 mm inboard of the mounting hole it shares an X coordinate with, and the pair are diagonally opposite each other.

NOTES (continued)

8. Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's drawing.
9. Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
10. Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about ± 0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.

SOURCES

1. Mechanical drawing: <https://datasheets.raspberrypi.com/rpi5/raspberry-pi-5-mechanical-drawing.pdf> - Raspberry Pi Ltd
2. Mounting holes: <https://datasheets.raspberrypi.com/rpi5/raspberry-pi-5-mechanical-drawing.pdf> - Hole diameter dimensioned on the drawing as $\varnothing 2.7$ mm; the keep-out circle is drawn and measures 5.80 mm.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.70	5.80
MT2	61.50	3.50	2.70	5.80
MT3	3.50	52.50	2.70	5.80
MT4	61.50	52.50	2.70	5.80
AUX1	3.50	9.50	3.00	not given
AUX2	61.50	46.50	3.00	not given

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.08 to 57.84	50.04 to 54.96
2	Ethernet RJ45	66.72 to 87.96	2.21 to 18.19
3	USB 3.0 type A (upper pair)	70.92 to 87.24	40.84 to 53.15
4	USB 3.0 type A (lower pair)	70.92 to 87.24	22.92 to 35.16
5	USB-C power input	7.80 to 14.52	-1.32 to 5.99
6	micro-HDMI 0	23.04 to 28.56	-0.84 to 6.84
7	micro-HDMI 1	36.48 to 42.00	-0.84 to 6.84

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.40	39.29	8.13	45.64
JB	left edge	9.40	16.43	8.13	22.78
JC	bottom edge	27.60	9.40	21.25	8.13

RASPBERRY PI 5

85 x 56 mm

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	RPI-05	A
MATERIAL	GENERAL TOLERANCE		
PCB, thickness not stated	edge ± 0.20 hole pos ± 0.10 hole dia ± 0.08		