


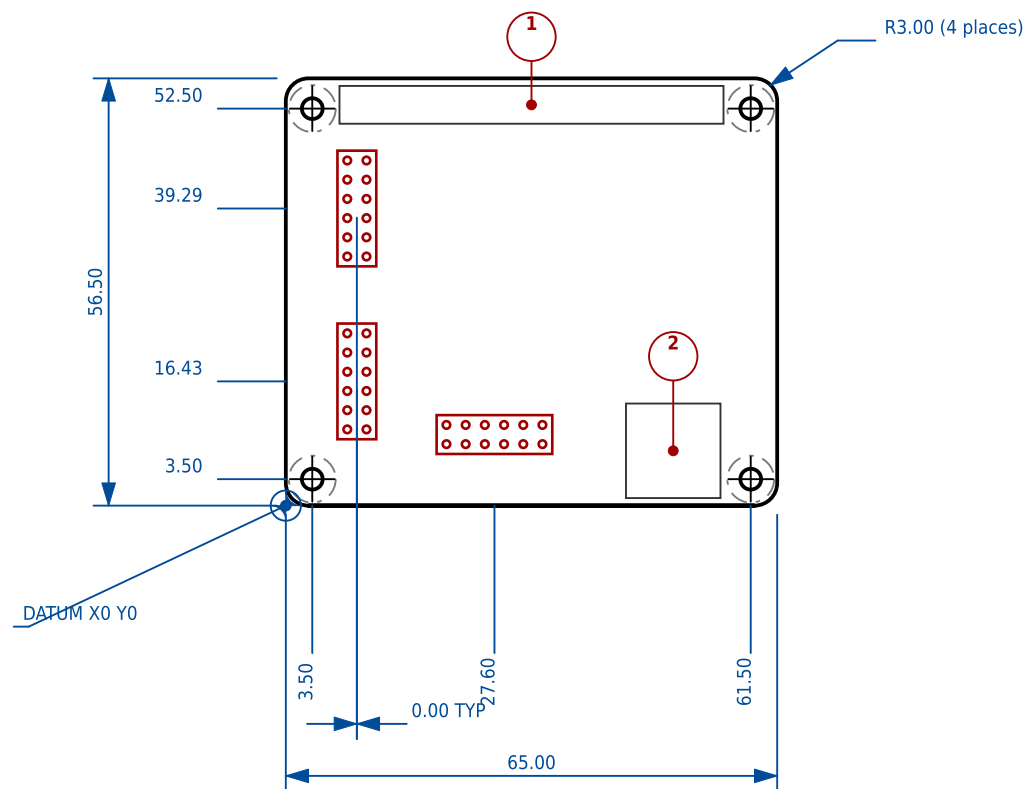

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
M1	3.50	3.50	2.75	6.20
M2	61.50	3.50	2.75	6.20
M3	3.50	52.50	2.75	6.20
M4	61.50	52.50	2.75	6.20

PMOD HOST HEADERS

PORT	REF	CX	CY	PIN1 X	PIN1 Y
JA	JA	9.40	39.29	8.13	45.64
JB	JB	9.40	16.43	8.13	22.78
JC	JC	27.60	9.40	21.25	8.13

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	40-pin GPIO socket (mates with the Pi)	7.10 to 57.90	50.50 to 55.50
2	5 V barrel jack J2	45.00 to 57.50	1.00 to 13.50

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. DERIVED DIMENSIONS. Digilent publish no mechanical drawing, DXF, STEP or board file for this product. Pmod host positions were measured photogrammetrically and are good to about ± 0.75 mm.
4. JA and JB face out of the left edge, JC out of the lower edge. All three are right-angle hosts: the connector body overhangs the board edge by roughly 3 mm and the through-hole field sits about 9.4 mm in from it, so a mating Pmod peripheral plugs in from outside that edge.
5. JA and JB are snapped to the 22.86 mm host spacing the Pmod Interface Specification mandates; they measured 23.18 mm apart, inside the measurement uncertainty.
6. Fabrication tolerance is not called out per dimension. Assume ± 0.20 on the routed board edge, ± 0.10 on drilled hole position and ± 0.08 on plated hole diameter unless the board house states otherwise.

SOURCES

1. Raspberry Pi HAT mechanical specification: <https://github.com/raspberrypi/hats/blob/master/hat-board-mechanical.pdf> - 65 x 56.0 or 65 x 56.5 mm (56.5 for an SMT 40-way header), 3 mm corner radii, four 2.75 mm holes 3.5 mm in from the edges on a 58 x 49 mm rectangle.
2. Pmod Interface Specification 1.2.0: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent, revised 5 October 2017. Host ports on a common board edge are spaced .90 in (22.86 mm) centre to centre; pins are on a .10 in (2.54 mm) grid in both axes.
3. Board outline: <https://digilent.com/reference/add-ons/pmod-hat/start> - Digilent state width 65 mm, length 56.5 mm.
4. Pmod host positions: https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png - Measured from Digilent's official top view by `scripts/measure_pmod_hat.py`. Digilent publish no dimensioned drawing for this board.

DIGILENT PMOD HAT ADAPTER

410-366, fitted to a Raspberry Pi 40-pin GPIO header

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	ACC-01	A