


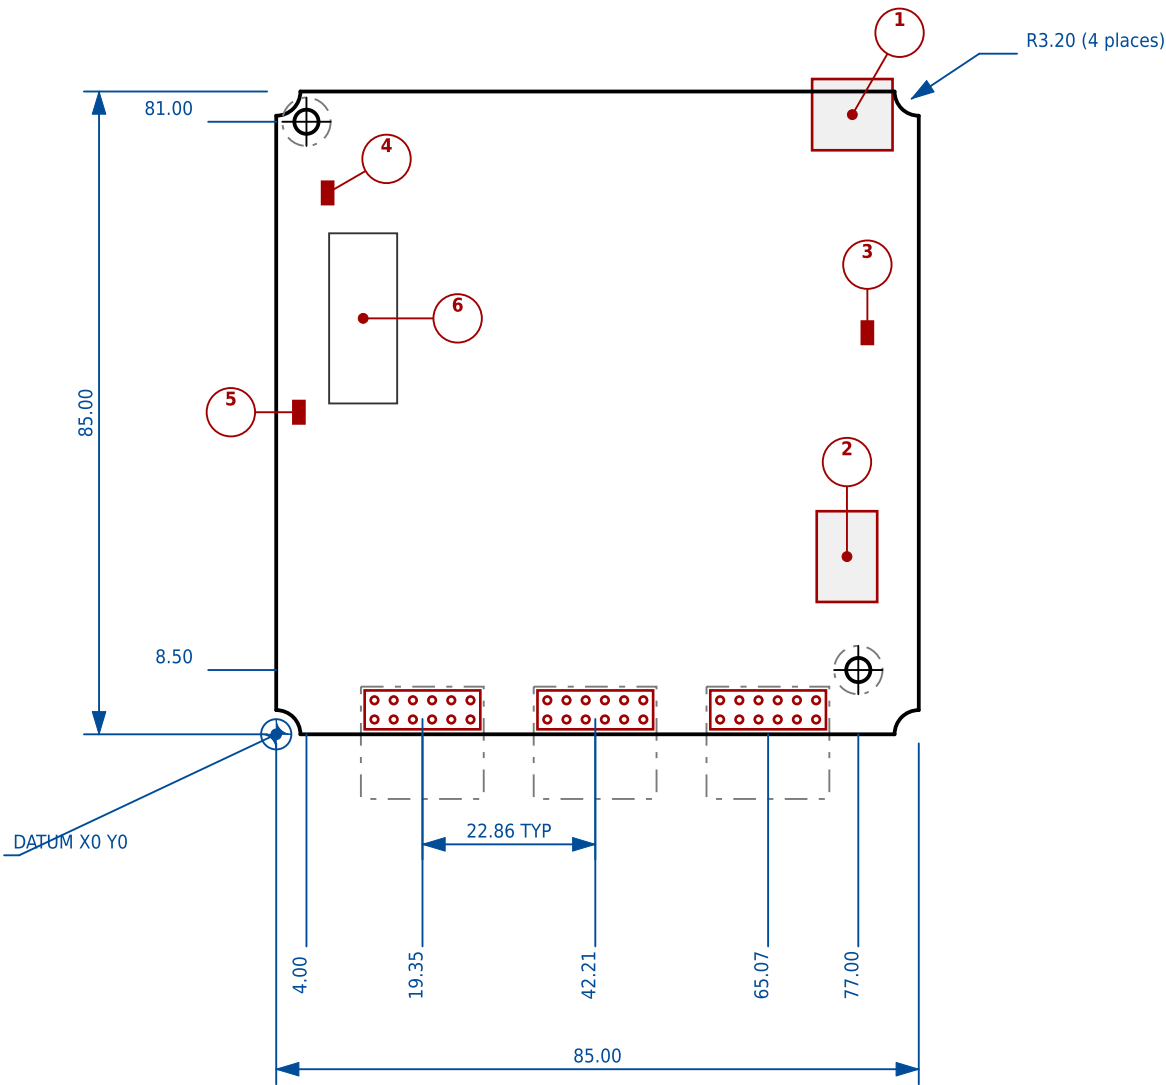

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
MT1	4.00	81.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	CX	CY	PIN1 X	PIN1 Y
INPUT	J11	19.35	3.23	25.70	4.50
BIDIR	J12	42.21	3.23	48.56	4.50
OUTPUT	J13	65.07	3.23	71.42	4.50

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	USB-C power / control	70.89 to 81.53	77.23 to 86.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	2.27 to 3.73	41.11 to 44.07
6	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25

NOTES

- All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
- Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
- Geometry is design nominal, read from the KiCad board file.
- Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
- The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.
- Fabrication tolerance is not called out per dimension. Assume +/-0.20 on the routed board edge, +/-0.10 on drilled hole position and +/-0.08 on plated hole diameter unless the board house states otherwise.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
- Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: no shipped shuttle yet

TINY TAPEOUT DEMO BOARD V3 (ETR)

tinytapeout-demo rev 3.3

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-08	A