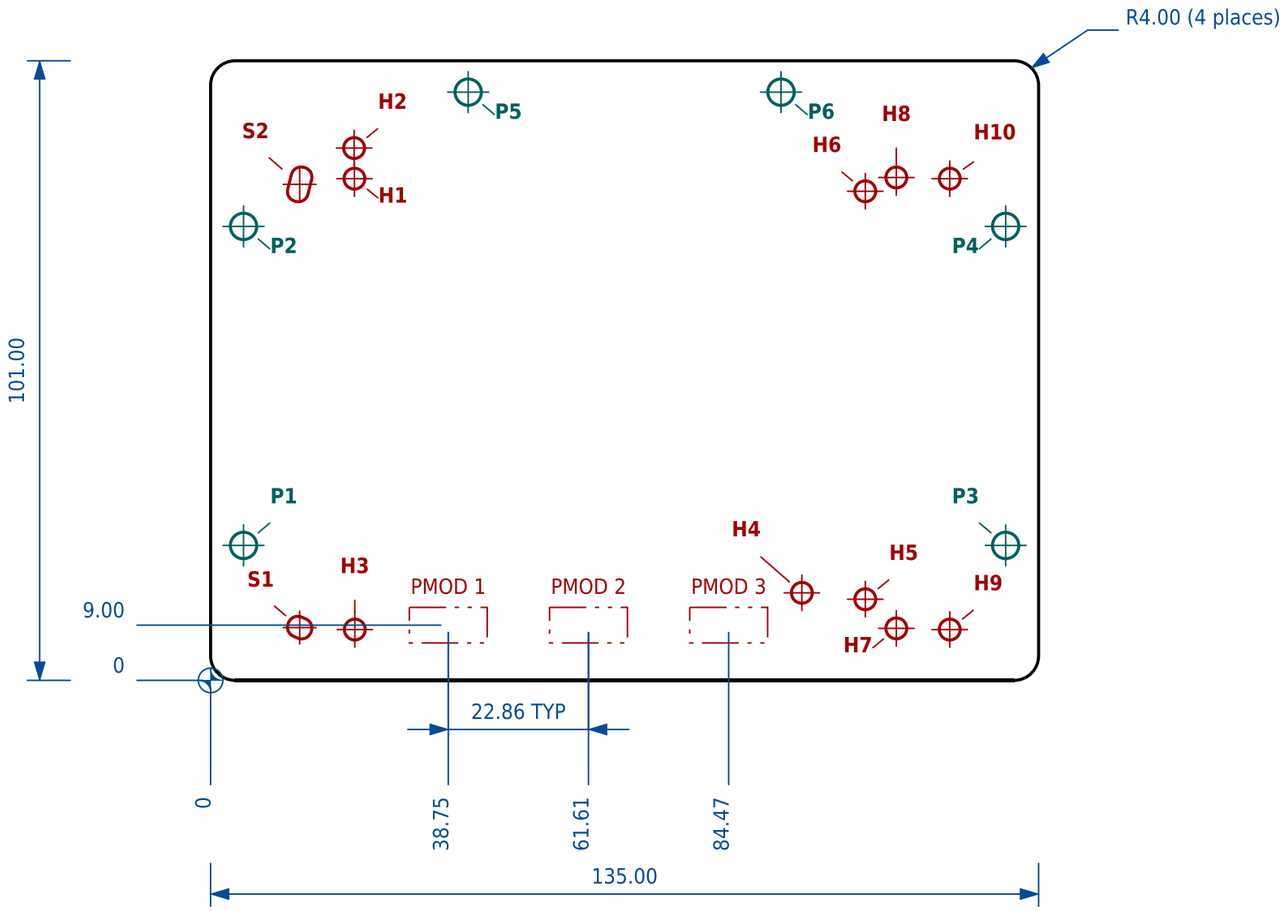



## BOARD MOUNTING HOLES

| ID | X mm | Y mm | DIA/WIDTH mm | LENGTH mm | USED BY |
|---|---|---|---|---|---|
| H1 | 23.45 | 81.78 | 3.40 | - | TT01-03:MT3, v3.2:MT1 |
| H2 | 23.40 | 86.77 | 3.40 | - | v3.3:MT1 |
| H3 | 23.51 | 8.29 | 3.40 | - | TT01-03:MT1 |
| H4 | 96.40 | 14.27 | 3.40 | - | v3.2:MT2, v3.3:MT2 |
| H5 | 106.75 | 13.22 | 3.40 | - | TT06-08:MT2 |
| H6 | 106.75 | 79.72 | 3.40 | - | TT06-08:MT4 |
| H7 | 111.81 | 8.47 | 3.40 | - | TT04-05:MT2 |
| H8 | 111.81 | 81.97 | 3.40 | - | TT04-05:MT4 |
| H9 | 120.51 | 8.29 | 3.40 | - | TT01-03:MT2 |
| H10 | 120.51 | 81.78 | 3.40 | - | TT01-03:MT4 |
| S1 | 14.24 / 14.80 | 8.72 / 8.47 | 3.40 | 4.01 | TT04-05:MT1, TT06-08:MT1 |
| S2 | 14.24 / 14.80 | 79.72 / 81.97 | 3.40 | 5.72 | TT04-05:MT3, TT06-08:MT3 |

## PLATE FIXING HOLES

| ID | X mm | Y mm | DIA mm |
|---|---|---|---|
| P1 | 5.37 | 22.00 | 4.30 |
| P2 | 5.37 | 74.00 | 4.30 |
| P3 | 129.63 | 22.00 | 4.30 |
| P4 | 129.63 | 74.00 | 4.30 |
| P5 | 42.00 | 95.89 | 4.30 |
| P6 | 93.00 | 95.89 | 4.30 |

## NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the plate's lower-left corner, X right, Y up, seen from the side the board mounts on.
2. Hole positions are tabulated, not dimensioned on the view: there are too many to dimension and keep it readable. A slot row gives its two end centres; DIA/WIDTH is the slot width, LENGTH is overall.
3. USED BY reads <group>:<hole>; MT1 to MT4 are the board's own hole IDs. Groups, by board revision: TT01-03 = tt123-v2.2.6; TT04-05 = v1.2.2, v1.2.3; TT06-08 = v2.0.1, v2.1.0, v2.1.2; v3.2 and v3.3 = themselves, no shuttle yet.
4. The three PMOD envelopes are not machined features. They mark where the Pmod host pin fields end up, the same place for every board revision. That is the point of the plate.
5. Fit the board on standoffs. A board uses only the holes and slots its USED BY row names.
6. Board holes and slots are 3.4 mm, a close clearance fit on M3. Plate fixings are 4.3 mm, a clearance fit on M4. A slot spans two revisions whose holes are too close together to drill separately.

## NOTES (continued)

7. The Pmod host connector bodies overhang the plate's front edge by 2.78 mm, so a peripheral module plugs into clear air.
8. Cut file: tt-generic-mounting-plate.dxf, four layers. Sizes here are finished sizes; allow for your cutter's kerf.
9. Fit the plate to its chassis before the board: the fixings sit in the border, which a board overhangs. Least material between features is 1.59 mm, between H1 and H2.
10. Drawing TT-MP-02 shows which holes each revision uses.

## SOURCES

1. Derived from: data/tinytapeout_boards.py - Board outlines, mounting holes and Pmod host positions for every Tiny Tapeout demo board revision, extracted from the upstream KiCad files.
2. Pmod host pitch: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent mandate .90 in (22.86 mm) between adjacent host ports on a board edge, which is why one plate can serve every revision.

# TT GENERIC MOUNTING PLATE

Accepts every demo board revision, Pmod hosts fixed in place

| DRAWN | DATE | UNITS | SCALE |
|---|---|---|---|
| **generated** | **2026-09-10** | **mm** | **1:1** |
| SIZE | SHEET | DRAWING NO | REV |
| **A3** | **1 OF 1** | **TT-MP-01** | **A** |
| MATERIAL | | GENERAL TOLERANCE | |
| **3 mm acrylic or 1.6 mm FR4** | | **edge +/-0.20 hole pos +/-0.10 allow for cutter kerf** | |