


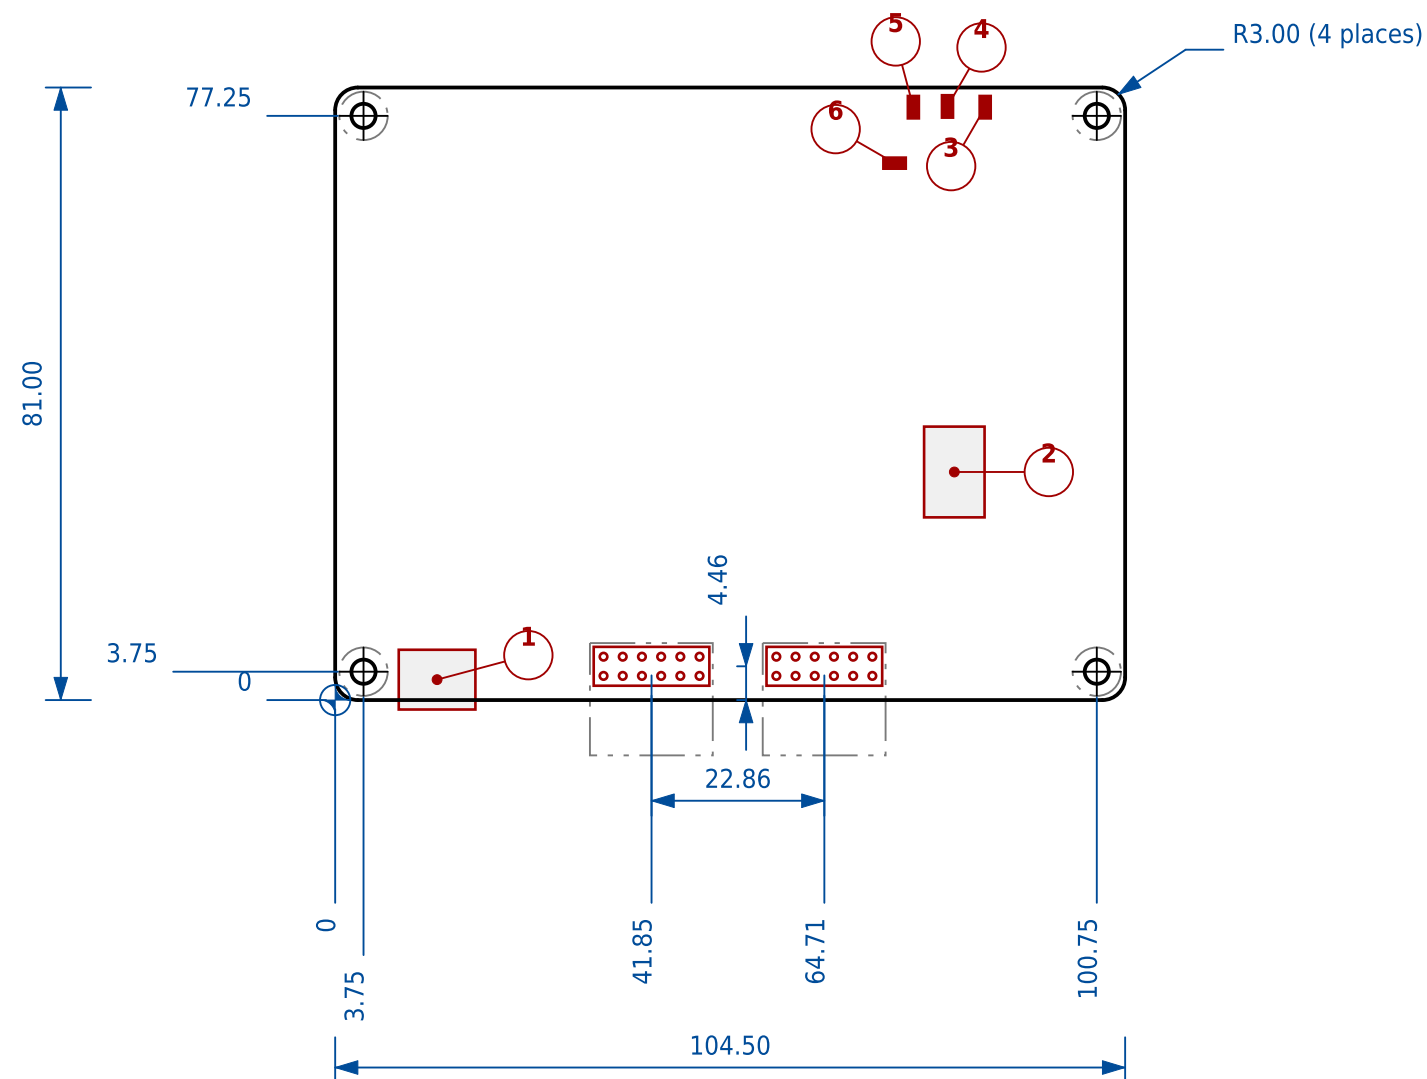

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. Hole IDs are the board's own reference designators, taken from the KiCad file, not assigned by this drawing. They are not in any particular positional order.
4. No other demo board revision shares this geometry.
5. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
6. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.

NOTES (continued)

7. The chain-double-dot rectangle around each Pmod host pin field is the connector body, drawn where it overhangs the board edge. It is not a board feature; it is what a mating peripheral and any bracket have to clear.
8. Pmod host coordinates are tabulated to three decimals, unlike everything else on this sheet. That is not a claim to micrometre accuracy: rounded to two, two adjacent hosts print 22.85 apart and contradict the 22.86 pitch the specification mandates and this drawing dimensions.
9. Pmod host ports are lettered JA, JB, JC on the Pmod HAT Adapter and on the Raspberry Pi sheets, after Diligent's own labelling; named by signal direction on the Tiny Tapeout demo boards, after the silkscreen; and numbered PMOD 1 to 3 on the mounting plate sheets, which number positions rather than ports. The fitting guide TT-MP-02 maps a board's first host to a plate position.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.75	3.75	3.20	6.40
MT2	100.75	3.75	3.20	6.40
MT3	3.75	77.25	3.20	6.40
MT4	100.75	77.25	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
PMOD A	J3	bottom	41.850	4.465	48.200	5.735
PMOD B	J9	bottom	64.710	4.465	71.060	5.735

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	8.41 to 18.55	-1.25 to 6.63
2	7-segment display	77.91 to 85.91	24.16 to 36.16
3	LED D1	85.25 to 86.72	76.92 to 79.88
4	LED D2	80.27 to 81.73	77.02 to 79.98
5	LED D3	75.75 to 77.22	76.92 to 79.88
6	LED D4	72.52 to 75.48	70.27 to 71.73

NOTES (continued)

10. Board thickness is 1.6 mm nominal. The KiCad file states 1.60000 mm, which is the sum of its stackup layers rather than a specified finished thickness, so it is not quoted as one.

SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt123-demo-pcb> mpw-mb1.kicad_pcb @ 3d721a6 - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.6, dated 2024-02-14
2. Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: TT01, TT02, TT03

TINY TAPEOUT TT01/02/03 DEMO BOARD

mpw-mb1 rev 2.2.6

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-01	REV A
MATERIAL PCB, 1.6 nominal		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	