


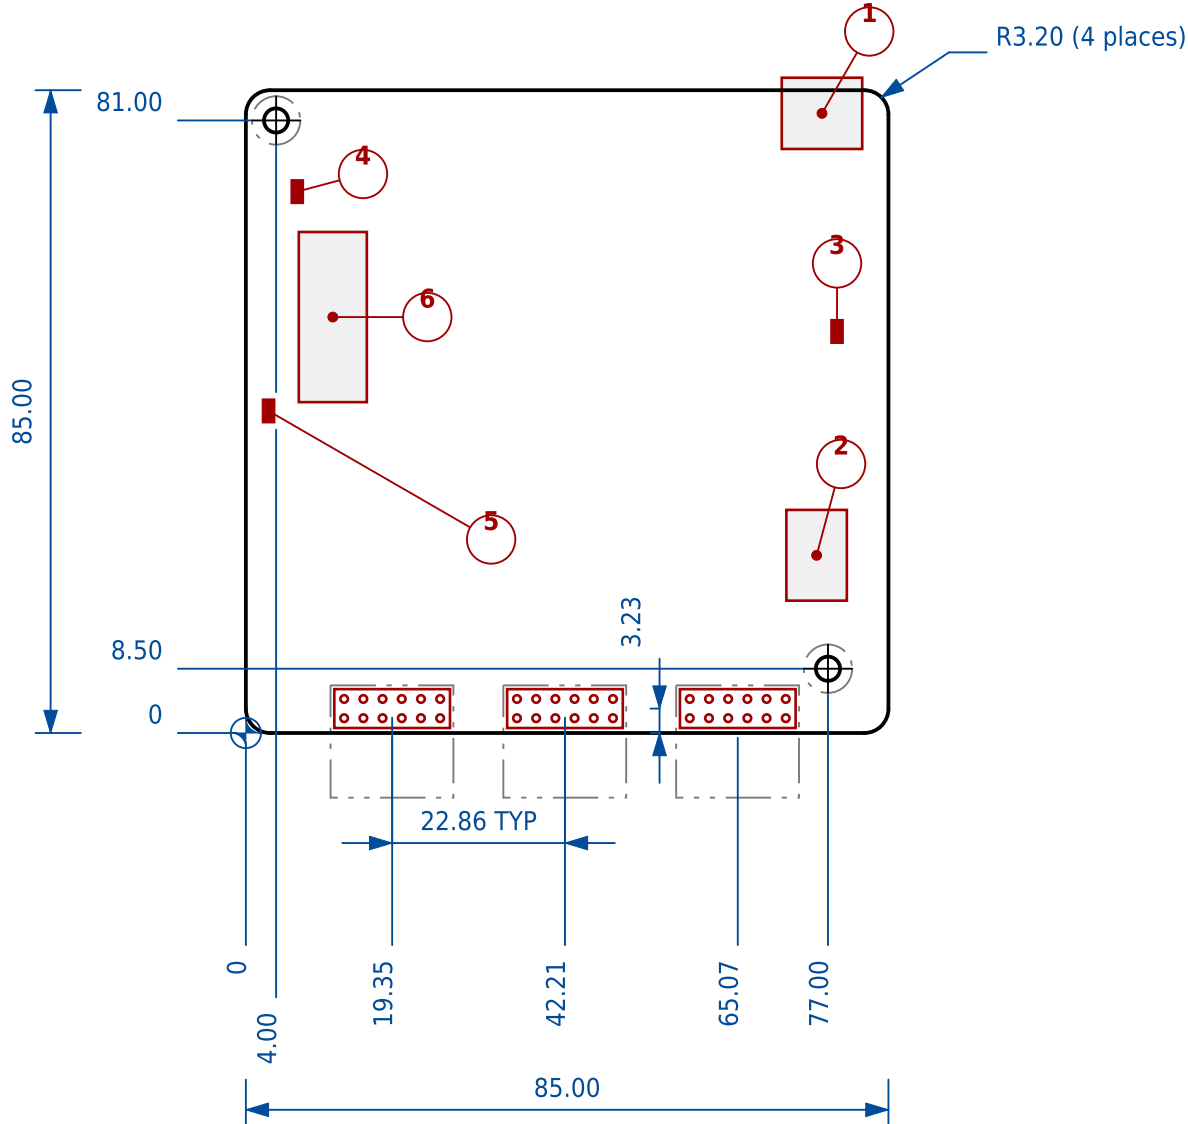

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators, taken from the KiCad file, not assigned by this drawing. They are not in any particular positional order.
- No other demo board revision shares this geometry.
- Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
- The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.

NOTES (continued)

- The chain-double-dot rectangle around each Pmod host pin field is the connector body, drawn where it overhangs the board edge. It is not a board feature; it is what a mating peripheral and any bracket have to clear.
- Pmod host coordinates are tabulated to three decimals, unlike everything else on this sheet. That is not a claim to micrometre accuracy: rounded to two, two adjacent hosts print 22.85 apart and contradict the 22.86 pitch the specification mandates and this drawing dimensions.
- Pmod host ports are lettered JA, JB, JC on the Pmod HAT Adapter and on the Raspberry Pi sheets, after Digilent's own labelling; named by signal direction on the Tiny Tapeout demo boards, after the silkscreen; and numbered PMOD 1 to 3 on the mounting plate sheets, which number positions rather than ports. The fitting guide TT-MP-02 maps a board's first host to a plate position.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	81.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	77.23 to 86.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	2.27 to 3.73	41.11 to 44.07
6	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25

NOTES (continued)

- Board thickness is 1.6 mm nominal. The KiCad file states 1.56100 mm, which is the sum of its stackup layers rather than a specified finished thickness, so it is not quoted as one.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
- Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: no shipped shuttle yet

TINY TAPEOUT DEMO BOARD V3

tinytapeout-demo rev 3.3

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-08	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	