


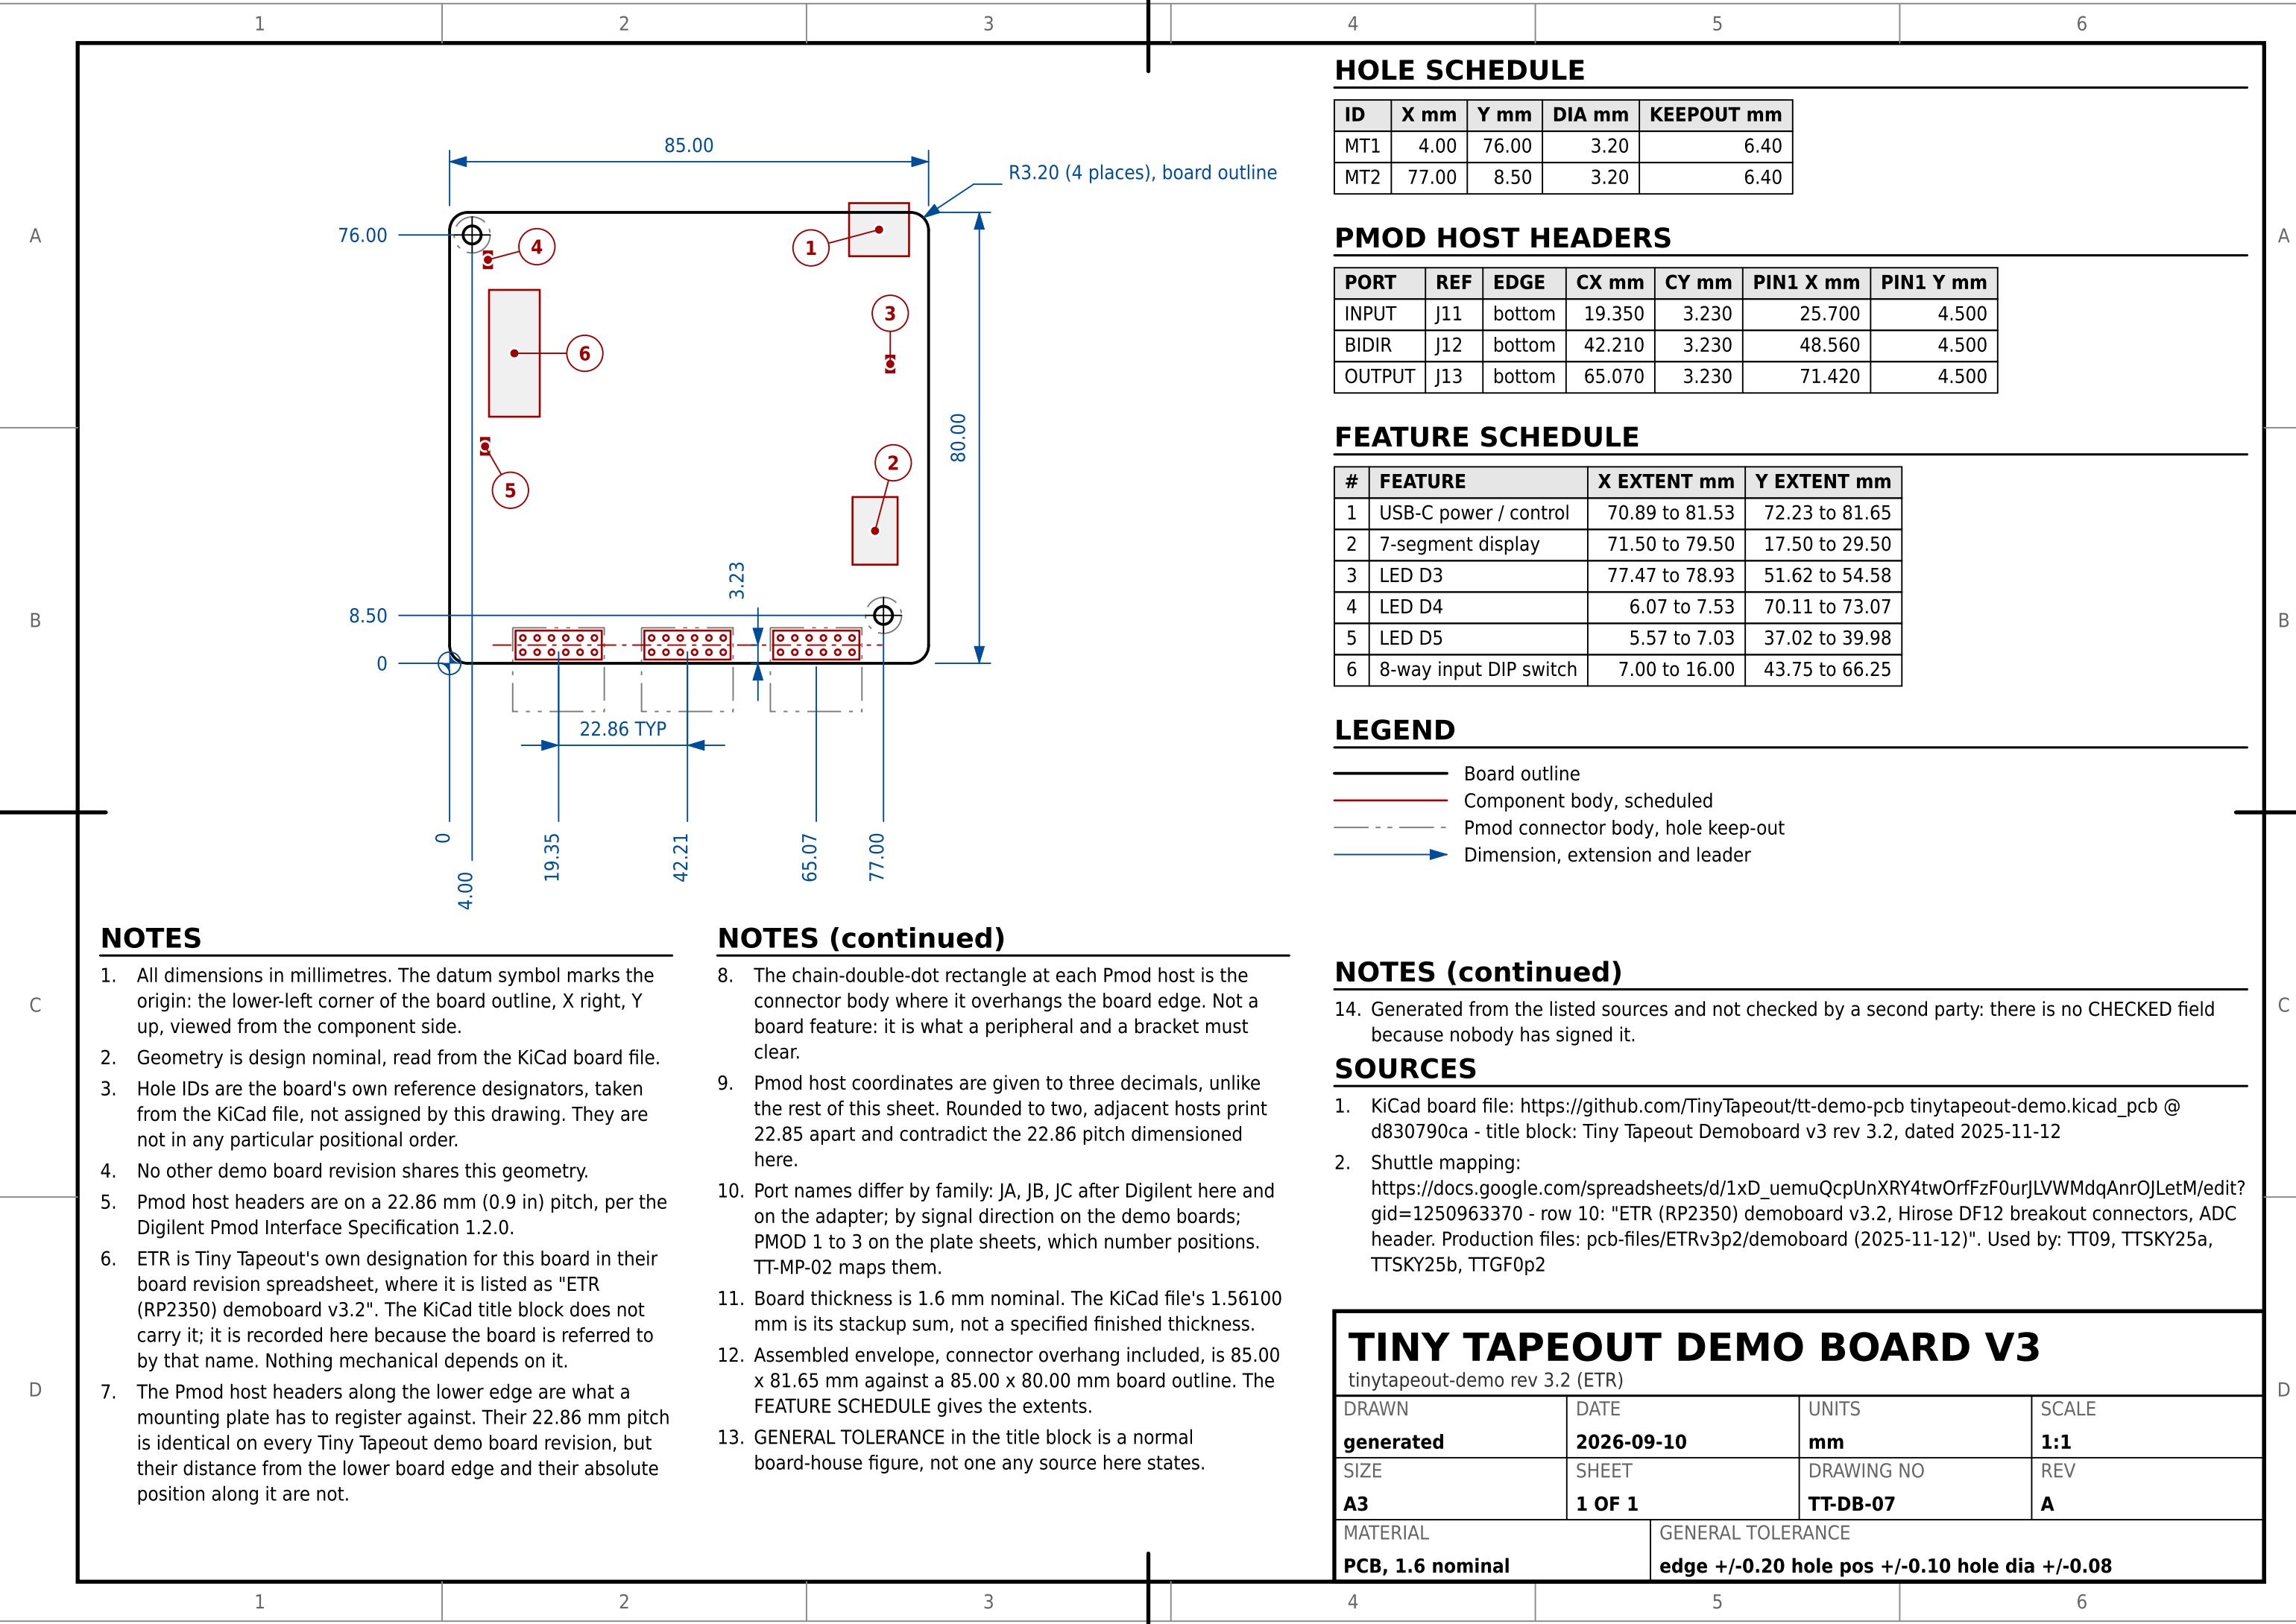

NOTES

- 1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
- 2. Geometry is design nominal, read from the KiCad board file.
- 3. Hole IDs are the board's own reference designators, taken from the KiCad file, not assigned by this drawing. They are not in any particular positional order.
- 4. No other demo board revision shares this geometry.
- 5. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Diligent Pmod Interface Specification 1.2.0.
- 6. ETR is Tiny Tapeout's own designation for this board in their board revision spreadsheet, where it is listed as "ETR (RP2350) demoboard v3.2". The KiCad title block does not carry it; it is recorded here because the board is referred to by that name. Nothing mechanical depends on it.
- 7. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.

NOTES (continued)

- 8. The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the board edge. Not a board feature: it is what a peripheral and a bracket must clear.
- 9. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- 10. Port names differ by family: JA, JB, JC after Diligent here and on the adapter; by signal direction on the demo boards; PMOD 1 to 3 on the plate sheets, which number positions. TT-MP-02 maps them.
- 11. Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.
- 12. Assembled envelope, connector overhang included, is 85.00 x 81.65 mm against a 85.00 x 80.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- 13. GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

NOTES (continued)

- 14. Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

- 1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ d830790ca - title block: Tiny Tapeout Demoboard v3 rev 3.2, dated 2025-11-12
- 2. Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urjLVWMdqAnrOJLetM/edit?gid=1250963370 - row 10: "ETR (RP2350) demoboard v3.2, Hirose DF12 breakout connectors, ADC header. Production files: pcb-files/ETRv3p2/demoboard (2025-11-12)". Used by: TT09, TTSKY25a, TTSKY25b, TTGF0p2

TINY TAPEOUT DEMO BOARD V3

tinytapeout-demo rev 3.2 (ETR)

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-07	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	