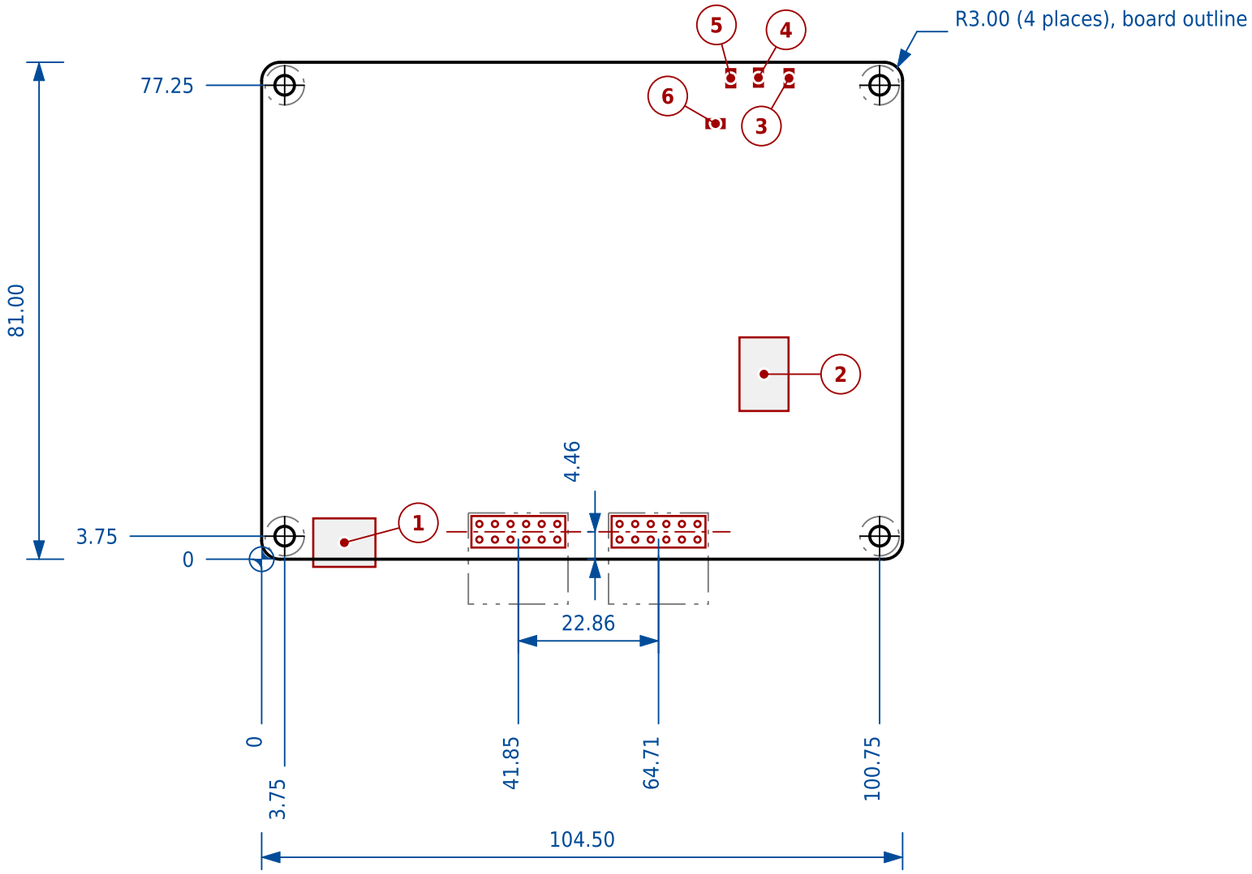


HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.75	3.75	3.20	6.40
MT2	100.75	3.75	3.20	6.40
MT3	3.75	77.25	3.20	6.40
MT4	100.75	77.25	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
PMOD A	J3	bottom	41.850	4.465	48.200	5.735
PMOD B	J9	bottom	64.710	4.465	71.060	5.735

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	8.41 to 18.55	-1.25 to 6.65
2	7-segment display	77.91 to 85.91	24.16 to 36.16
3	LED D1	85.25 to 86.72	76.92 to 79.88
4	LED D2	80.27 to 81.73	77.02 to 79.98
5	LED D3	75.75 to 77.22	76.92 to 79.88
6	LED D4	72.52 to 75.48	70.27 to 71.73

SOURCES (continued)

2. Shuttle mapping: https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md - used by: TT01, TT02, TT03

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. Hole IDs are the board's own reference designators, taken from the KiCad file, not assigned by this drawing. They are not in any particular positional order.
4. No other demo board revision shares this geometry.
5. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
6. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.
7. The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the board edge. Not a board feature: it is what a peripheral and a bracket must clear.

NOTES (continued)

8. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
9. Port names differ by family: JA, JB, JC after Digilent on the adapter and Raspberry Pi sheets; by signal direction on the demo boards, after the silkscreen; PMOD 1 to 3 on the plate sheets, which number plate positions. TT-MP-02 maps them.
10. Board thickness is 1.6 mm nominal. The KiCad file's 1.60000 mm is its stackup sum, not a specified finished thickness.
11. Assembled envelope, connector overhang included, is 104.50 x 82.25 mm against a 104.50 x 81.00 mm board outline. The FEATURE SCHEDULE gives the extents.
12. The GENERAL TOLERANCE in the title block is a normal printed circuit fabrication figure, not one this sheet's source states: no source here publishes a general tolerance.

SOURCES

1. KiCad board file: https://github.com/TinyTapeout/tt123-demo-pcb mpw-mb1.kicad_pcb @ 3d721a6 - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.6, dated 2024-02-14

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

TINY TAPEOUT TT01/02/03 DEMO BOARD

mpw-mb1 rev 2.2.6

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**TT-DB-01**	**A**
MATERIAL	GENERAL TOLERANCE		
PCB, 1.6 nominal	**edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08**		