


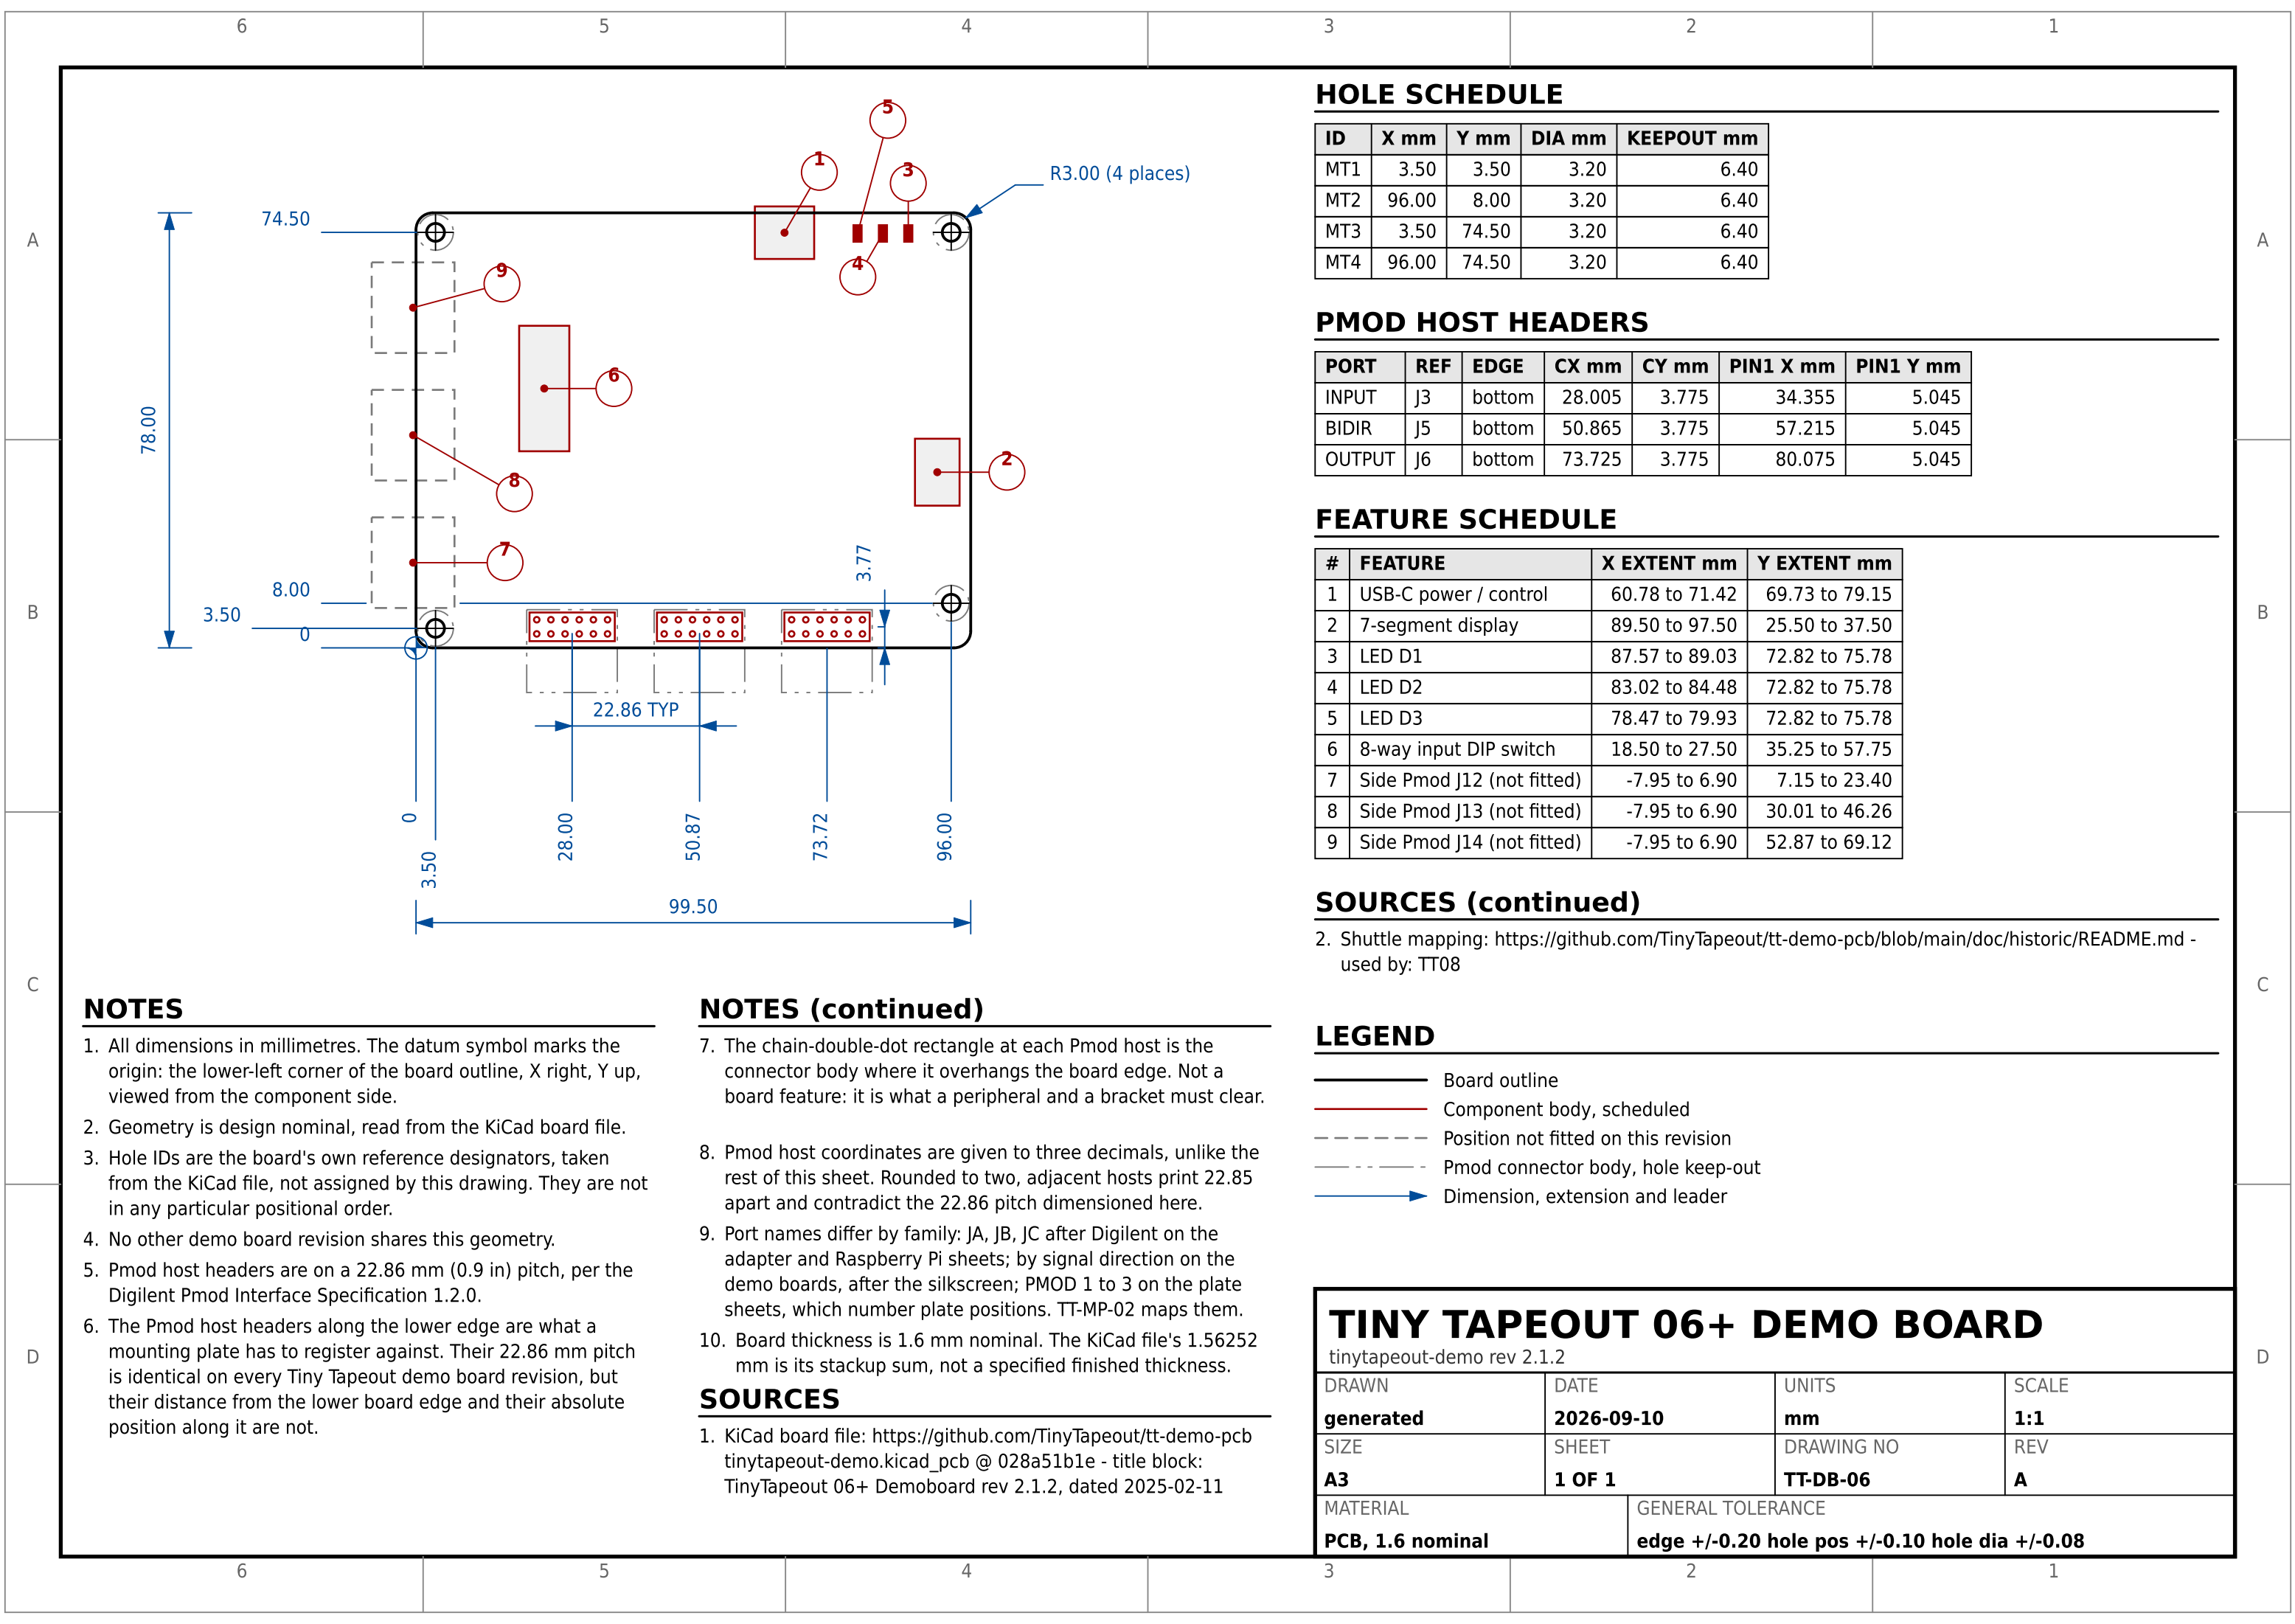

## NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. Hole IDs are the board's own reference designators, taken from the KiCad file, not assigned by this drawing. They are not in any particular positional order.
4. No other demo board revision shares this geometry.
5. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
6. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.

## NOTES (continued)

7. The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the board edge. Not a board feature: it is what a peripheral and a bracket must clear.
8. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
9. Port names differ by family: JA, JB, JC after Digilent on the adapter and Raspberry Pi sheets; by signal direction on the demo boards, after the silkscreen; PMOD 1 to 3 on the plate sheets, which number plate positions. TT-MP-02 maps them.
10. Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.

## SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb>  
tinytapeout-demo.kicad\_pcb @ 028a51b1e - title block:  
TinyTapeout 06+ Demoboard rev 2.1.2, dated 2025-02-11

## HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 3.50  | 3.50  | 3.20   | 6.40       |
| MT2 | 96.00 | 8.00  | 3.20   | 6.40       |
| MT3 | 3.50  | 74.50 | 3.20   | 6.40       |
| MT4 | 96.00 | 74.50 | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J3  | bottom | 28.005 | 3.775 | 34.355    | 5.045     |
| BIDIR  | J5  | bottom | 50.865 | 3.775 | 57.215    | 5.045     |
| OUTPUT | J6  | bottom | 73.725 | 3.775 | 80.075    | 5.045     |

## FEATURE SCHEDULE

| # | FEATURE                    | X EXTENT mm    | Y EXTENT mm    |
|---|----------------------------|----------------|----------------|
| 1 | USB-C power / control      | 60.78 to 71.42 | 69.73 to 79.15 |
| 2 | 7-segment display          | 89.50 to 97.50 | 25.50 to 37.50 |
| 3 | LED D1                     | 87.57 to 89.03 | 72.82 to 75.78 |
| 4 | LED D2                     | 83.02 to 84.48 | 72.82 to 75.78 |
| 5 | LED D3                     | 78.47 to 79.93 | 72.82 to 75.78 |
| 6 | 8-way input DIP switch     | 18.50 to 27.50 | 35.25 to 57.75 |
| 7 | Side Pmod J12 (not fitted) | -7.95 to 6.90  | 7.15 to 23.40  |
| 8 | Side Pmod J13 (not fitted) | -7.95 to 6.90  | 30.01 to 46.26 |
| 9 | Side Pmod J14 (not fitted) | -7.95 to 6.90  | 52.87 to 69.12 |

## SOURCES (continued)

2. Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: TT08

## LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## TINY TAPEOUT 06+ DEMO BOARD

tinytapeout-demo rev 2.1.2

|                  |            |                                                |       |
|------------------|------------|------------------------------------------------|-------|
| DRAWN            | DATE       | UNITS                                          | SCALE |
| generated        | 2026-09-10 | mm                                             | 1:1   |
| SIZE             | SHEET      | DRAWING NO                                     | REV   |
| A3               | 1 OF 1     | TT-DB-06                                       | A     |
| MATERIAL         |            | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |            | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |