


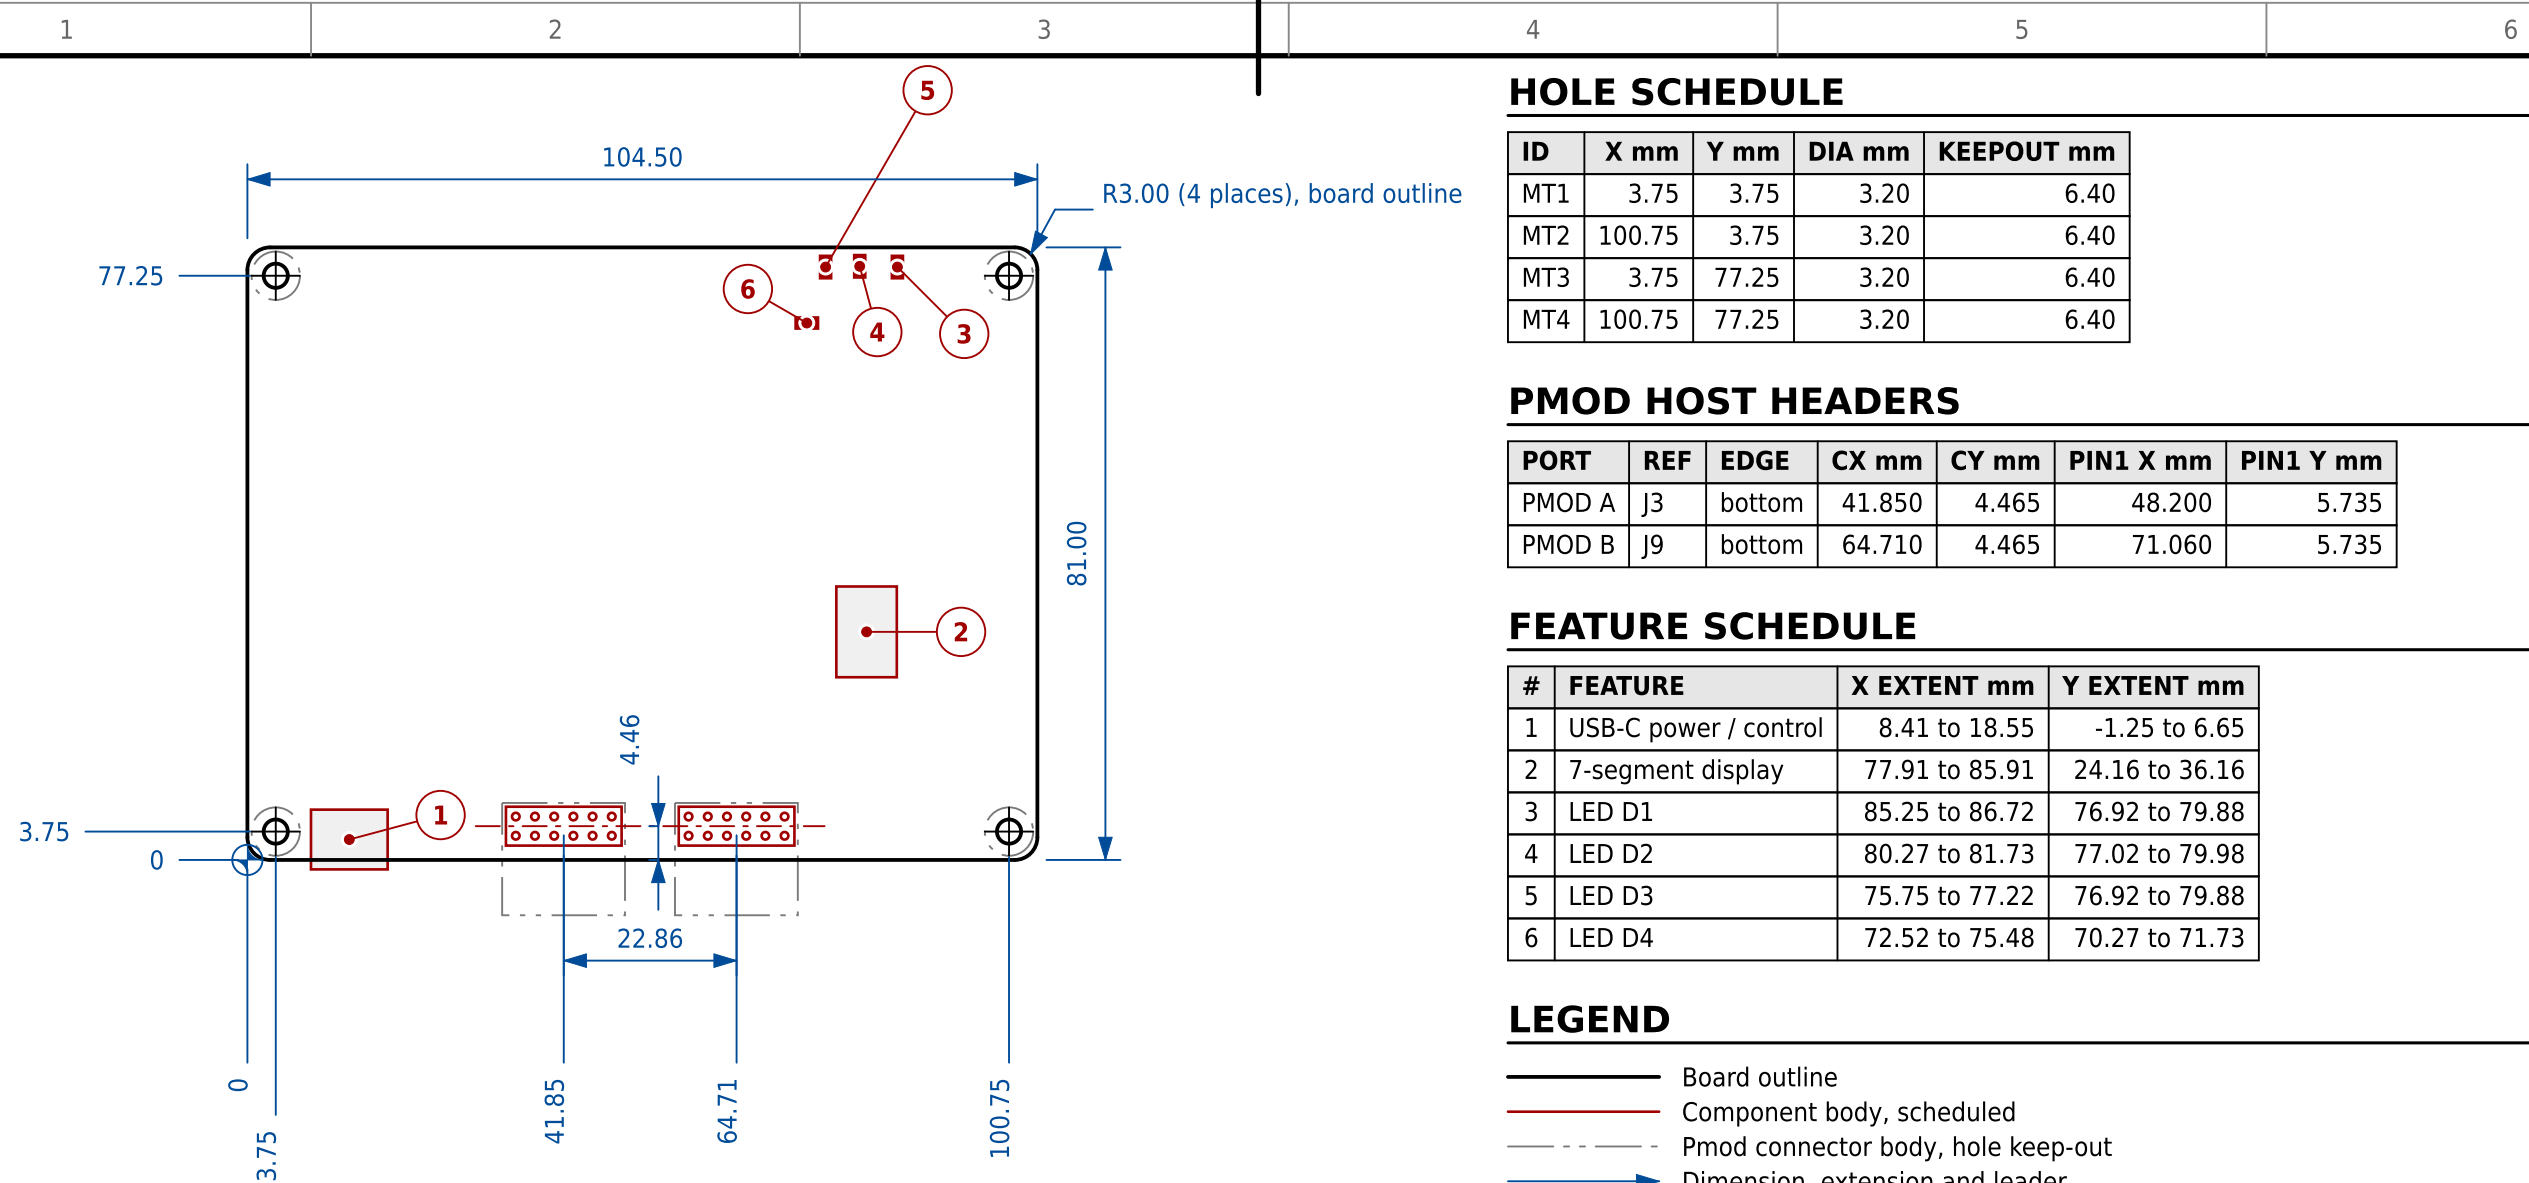

### NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Diligent Pmod Interface Specification 1.2.0.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm pitch is the same on every revision; their distance from the lower edge and their position along it are not.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the board edge. Not a board feature: it is what a peripheral and a bracket must clear.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.

### NOTES (continued)

- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.60000 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 104.50 x 82.25 mm against a 104.50 x 81.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

### SOURCES

- KiCad board file:  
<https://github.com/TinyTapeout/tt123-demo-pcb>  
mpw-mb1.kicad\_pcb @ 3d721a6 - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.6, dated 2024-02-14
- Shuttle mapping:  
<https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: TT01, TT02, TT03

### HOLE SCHEDULE

| ID  | X mm   | Y mm  | DIA mm | KEEPOUT mm |
|-----|--------|-------|--------|------------|
| MT1 | 3.75   | 3.75  | 3.20   | 6.40       |
| MT2 | 100.75 | 3.75  | 3.20   | 6.40       |
| MT3 | 3.75   | 77.25 | 3.20   | 6.40       |
| MT4 | 100.75 | 77.25 | 3.20   | 6.40       |

### PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| PMOD A | J3  | bottom | 41.850 | 4.465 | 48.200    | 5.735     |
| PMOD B | J9  | bottom | 64.710 | 4.465 | 71.060    | 5.735     |

### FEATURE SCHEDULE

| # | FEATURE               | X EXTENT mm    | Y EXTENT mm    |
|---|-----------------------|----------------|----------------|
| 1 | USB-C power / control | 8.41 to 18.55  | -1.25 to 6.65  |
| 2 | 7-segment display     | 77.91 to 85.91 | 24.16 to 36.16 |
| 3 | LED D1                | 85.25 to 86.72 | 76.92 to 79.88 |
| 4 | LED D2                | 80.27 to 81.73 | 77.02 to 79.98 |
| 5 | LED D3                | 75.75 to 77.22 | 76.92 to 79.88 |
| 6 | LED D4                | 72.52 to 75.48 | 70.27 to 71.73 |

### LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## TINY TAPEOUT TT01/02/03 DEMO BOARD

mpw-mb1 rev 2.2.6

|                                     |                           |                                                                            |                     |
|-------------------------------------|---------------------------|----------------------------------------------------------------------------|---------------------|
| DRAWN<br><b>generated</b>           | DATE<br><b>2026-09-10</b> | UNITS<br><b>mm</b>                                                         | SCALE<br><b>1:1</b> |
| SIZE<br><b>A3</b>                   | SHEET<br><b>1 OF 1</b>    | DRAWING NO<br><b>TT-DB-01</b>                                              | REV<br><b>A</b>     |
| MATERIAL<br><b>PCB, 1.6 nominal</b> |                           | GENERAL TOLERANCE<br><b>edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08</b> |                     |