



Rui Filipe Cantarino Valente de Almeida

Master of Science

Development of a Tomographic Atmospheric Monitoring System based on Differential Optical Absorption Spectroscopy

Thesis plan submitted in partial fulfillment
of the requirements for the degree of

Doctor of Philosophy in
Biomedical Engineering

Adviser: Pedro Vieira, Auxiliar Professor,
NOVA University of Lisbon



FACULDADE DE
CIÊNCIAS E TECNOLOGIA
UNIVERSIDADE NOVA DE LISBOA

September, 2019

Contents

1	Introduction	1
1.1	Background and Motivation	1
1.1.1	Context	1
1.1.2	The Problem	2
1.1.3	Objectives	2
1.1.4	Methods	3
2	Research Question	5
2.1	Problem Introduction	5
2.2	Research Question	6
2.3	Hypothesis and Approach	7
3	Literature Review	9
3.1	Air pollution and pollutants	9
3.2	Tomographic algorithms and reconstruction techniques	10
3.2.1	Introduction	10
3.2.2	Initial Considerations	11
3.2.3	The Fourier Slice Theorem	12
3.2.4	The Filtered BackProjection Algorithm	13
3.3	DOAS	15
3.4	DOAS tomography	15
4	Research Methodology	17
4.1	Aimed contribution	17
4.2	Detailed work plan and scheduling	18
4.3	Validation methodology	18
4.4	Integration with other research activities	20
	Bibliography	21

List of Figures

3.1	A schematic representation of a projection.	11
3.2	Schematic representation for coordinate setting.	12
3.3	The FST, a schematic representation.	14
3.4	Schematic representation of an equiangular fan beam projection.	15
4.1	Low resolution Gantt chart for the present thesis.	18
4.2	Zoomed Gantt chart for task 1 -	18
4.3	Zoomed Gantt chart for task 1 -	19
4.4	Zoomed Gantt chart for task 1 -	19
4.5	Zoomed Gantt chart for task 1 -	19

List of Tables

2.1	Main research question.	7
2.2	Secondary research questions.	7
4.1	Dissemination plan for the PhD Project.	20

Glossary

aliquam	tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.
computer	An electronic device which is capable of receiving information (data) in a particular form and of performing a sequence of operations in accordance with a predetermined but variable set of procedural instructions (program) to produce a result in the form of information or signals.
cras viverra	metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat.
donec nonummy	pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo.
integer sapien	est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus.
lorem ipsum	dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris.
maecenas lacinia	nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem.
morbi ac	orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus.

GLOSSARY

morbi dolor	nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.
nam lacus	libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi.
nam dui	ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo.
name arcu	libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo.
nulla malesuada	porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis.
sed lacinia	nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus.

Acronyms

AP	Air Pollution
CT	Computed Tomography
DOAS	Differential Optical Absorption Spectroscopy
EPA	Environmental Protection Agency (United States)
FBP	Filtered BackProjection
FFF	Forest Fire Finder
FST	Fourier Slice Theorem
FT	Fourier Transform
ICE	Internal Combustion Engine
IFT	Inverse Fourier Transform
ML	Machine Learning
PM	Particulate Matter
ROI	Region Of Interest
RQ	Research Question
SLR	Systematic Literature Review
VOC	Volatile Organic Compound

ACRONYMS

WHO World Health Organization

Symbols

*

Introduction

1.1 Background and Motivation

1.1.1 Context

The idea behind this thesis was born in 2015, at NGNS-IS (a Portuguese tech startup). At the time, the company's flagship product was the Forest Fire Finder (**FFF**). The **FFF** was a forest fire detection system, capable of mostly autonomous and automatic operation. The system was the first application of Differential Optical Absorption Spectroscopy **DOAS** for fire detection, and for that it was patented in 2007 (see [17, 18]). The **FFF** is a remote sensing device that scans the horizon for the presence of a smoke column, sequentially performing a chemical analysis of each azimuth, using the Sun as a light source for its spectroscopic operations [15].

The **FFF** was deployed in several "habitats", both nationally (Parque Nacional da Peneda-Gerês and Ourém) and internationally (Spain and Brazil). One of the company's clients at the time was interested in a pollution monitoring solution, and asked if the spectroscopic system would be capable of performing such a task. The challenge resonated through the company's structure and the idea that created this thesis was born. The team then started reading about the concept of Air Pollution **AP** and how both populations and entities were concerned about it. It became clear that, while there were already several methods to measure **AP**, there was a clear market drive for the development of a system that could leverage the large area capabilities of a **DOAS** device while being able to provide a more spatially resolved "picture" of the atmospheric status.

With the understanding that this was a very valid idea, and that air quality was (and still is) a growing concern in the minds of both people and governments, the company managed to have this research financed by a PT2020 European fund, which was not only a very welcome financial contribution, but also a clear validation of the project's goals and of the need there was for a system with the proposed capabilities. However valid and necessary the product was, it was also plain to see that although

FFF was a good starting point, there was still a lot of continuous research work needed before any of the goals that had been set were achieved. It was this need that led to the publication of this PhD project, in a tripartite consortium between FCT-NOVA, NGNS-IS and the Portuguese Foundation for Science and Technology.

1.1.2 The Problem

The first step in tackling the development of the proposed system was to understand the problem it should be dealing with. Air Pollution (AP) is one of the most present concerns of people around the industrialized modern world. In Europe, it is perceived to be the second most important threat to the environment. The first is climate change, which is great part caused by AP. Scientists in many countries have established it as a major cause for premature death, disease onset and hospital visits for some decades now. Regulatory bodies of many countries have been gathered to put some legislative pressure on industries and on society itself, in order to produce a decrease in the amount of Air Pollution to which people are exposed. These policies and measures have had a dramatic influence in air quality, which is very significantly improved throughout the years. In spite of this, official reports continue to highlight the importance of keeping a vigilant eye towards AP proliferation and its possible undiscovered health effects. A better introduction to the subject of AP is produced in Section 2.1.

Our spectacular progress as a species in the last few centuries has had some unforeseen adverse consequences. Mitigating is not only a responsibility, but also a necessity. In some regards, as is the AP case, this mitigation is only achievable with intelligent and effective action. This of course demands that we understand, trace and measure it in as many ways as possible. This project aimed to create just that: another way in which to measure and map the behavior of certain pollutants.

1.1.3 Objectives

The overarching goal of this thesis was to theorize and design a bidimensional mapping tool for trace atmospheric pollutants such as NO_x and SO_x , using DOAS as the measurement technique. In order to maximize commercial value (and viability), the system had to be small and mobile. During the research, several "micro-objectives" appeared regularly. Some were kept and incorporated in the workplan, others discarded after initial exploration. The main secondary objectives were:

- To use a tomographic approach for the mapping procedure;
- To ensure the designed system would be small and highly mobile;
- To use a single collection point, minimizing material costs for the technology.

These objectives allowed setting several research questions, which are introduced in Section 2.2.

1.1.4 Methods

To address these goals, I assumed the development of this thesis to be essentially split in two parts, which are to be explored simultaneously. They can (coarsely) be addressed as *tomography* and *instrumentation*. On the tomography side, it will be necessary to study what are the more appropriate algorithms (and what type of tomography), how they can be physically deployed (i.e., the problem's geometry) and what type of reconstruction method is the more favorable. Regarding the instrumentation, there are also several points that need considering: decisions are required with regard to the mechanics, the controls and the optical components of the final system. A more detailed discussion of these topics can be found in Section 2.3 and Chapter ??.

One of the most important steps in the development of this work is designing and implementing a simulation software platform, that allows the validation of the acquisition strategy, the geometry selection and the reconstruction approach. This endeavor will also be of critical importance for component selection, since it will define the component requirements for the whole system. On the optical instrumentation side, this project will require optimizing FFF's optical assembly. Although similar in purpose and types of components, this assembly is significantly larger than what is acceptable for this project and needs redesigning.

Research Question

2.1 Problem Introduction

AP is a very important topic of discussion in the current days, with scientists and researchers around the globe being very well aware of the potential effects it can have on the health of individuals and populations across all ecosystems. After climate change (one of the largest capital threats to life on Earth, perhaps just behind nuclear apocalypse), AP is the biggest environmental concern for Europeans, and Europe's single largest environmental health hazard [EEA2016]. It has also been established by many authors as a major cause of premature death, cardiopulmonary disease onset and hospital visits [EEA2007, EEA2016, 4, 19].

Even in spite of all the trouble it causes, defining AP can be a challenge. In fact, its effects and presence is so all-encompassing, that it would be fair to say that its definition changes with the angle with which one looks upon it. The United States Environmental Protection Agency (EPA) defined Air Pollution (AP) as "*the presence of contaminants or pollutant substances in the air that interfere with human health or welfare, or produce other harmful environmental effects*" [16]. This is (perhaps intentionally) a very broad definition, too broad to avoid vagueness. It does introduce a key concept: the term *pollutant*, which needs be discussed in order to complete the definition above.

It would be very hard to find someone who did not have an almost instinctive idea of what a pollutant is. We know something is amiss when we notice our air is full of smoke or smells strange, but our senses are not enough. There are many chemical components that are untraceable by unaided humans, and some that are only detected by our noses and eyes at concentration levels which are above the threshold where they can damage our health. This makes the task of separating pollutants from non-pollutants a non-trivial one. If we cannot rely solely on our senses to detect them, then it is up to the scientists and engineers to create methods that allow us to do so. Whats more, we must also rely on them to understand how can a normally harmless substance be a pollutant, depending on the circumstance. For instance, nitrous compounds are

traditionally beneficial to the soils and cultures, but they can and do cause pulmonary and cardiovascular complications in humans [2, 4, 10].

Context matters to pollutants. The toxic nature of a certain chemical only is revealed when someone or something gets exposed to it. Even then, there are exposure levels which do not bear any effects, good or bad. At these levels, a pollutant is but an impurity. There are too many potential pollutants in our modern day world to list here, but several reports make special mention to six pollutions, which are identified as being the major contributors to Air Pollution complications.

- Particle Matter (PM);
- Ground level ozone (O_3);
- Carbon monoxide (CO);
- Sulfur Oxides (SO_x);
- Nitrous Oxides (NO_x);
- Lead (Pb).

Exposure to these pollutants has different effects on humans, ranging in seriousness from skin irritation to neuropsychiatric complications, depending on dose and on the time the exposure lasts.

2.2 Research Question

In Chapter 1, I have introduced the reasons which led NGNS-IS to pursue the development of an atmospheric monitoring system, and that what set it apart from other systems was the ability to spectroscopically map pollutants concentrations using tomographic methods, thus defining a primary objective for this thesis.

Two secondary objectives were born from the necessary initial research, which had a very heavy influence over the adopted methods:

- To use a tomographic approach for the mapping procedure;
- To ensure the designed system would be small and highly mobile;
- To use a single light collection point, minimizing material costs.

Taking all the above into account, we arrive at the main Research Question (RQ), presented in Table 2.1.

This is the main research question. It gave rise to four other more detailed research questions. These secondary questions allow a better delimitation of the work at hand and are important complements to RQ1. These questions are presented in Table 2.2

Table 2.1: Main research question.

RQ1	<i>How to design a miniaturized tomographic atmosphere monitoring system based on DOAS?</i>
------------	---

Table 2.2: Secondary research questions.

RQ1.1	<i>What would be the best strategy for the system to cover a small geographic region?</i>
RQ1.2	<i>What would be the necessary components for such a system?</i>
RQ1.3	<i>How will the system acquire the data?</i>
RQ1.4	<i>What should the tomographic reconstruction look like and how to perform it?</i>

2.3 Hypothesis and Approach

This work is based on the hypothesis that a system such as the one described in Chapter 1, which responds to the RQ in Table 2.1 and Table 2.2 can be achieved by careful selection of mathematical tomographic algorithms and instrumentation that is able to implement them correctly.

The first step in answering the entirety of the research questions should be to answer RQ1.1. In fact, it is not possible to make any other decision before this matter is settled. As with any technical problem, there are several ways to create a tomographic atmospheric monitoring tool. However, each and every one of them implies some kind of compromise, which determines the system's capabilities and requirements. Will the system use retro-reflection? Shall it move during the measurement? These are the kind of questions that determine the whole project.

When the measurement strategy is determined, one could start picking parts and components. However, a better first approach would be designing a software simulation. This simulator must include all major system features, so that it correctly mimics reality and is therefore able to mathematically validate the acquisition and reconstruction approach. The results obtained from the simulation will then dictate mechanical and control requirements.

One other aspect that needs addressing is the optical section. As mentioned before, the system will be inspired in FFF's basic optical capabilities. However, the smoke detector was not conceived with spatial restrictions in mind. This important set of components will thus need redesigning, so that it is in line with the size objectives of the new system.

Literature Review

In this chapter, I provide a literary review on the three most important subjects for the work of this thesis: [AP](#), tomographic algorithms and [DOAS](#) tomography instrumentation.

3.1 Air pollution and pollutants

As stated in Section 2.2, the definition of [AP](#) is dependent on the context. Here, I will focus especially on the effects of pollutants on human health. Whether these effects are the most significant problems stemming from [AP](#) is debatable (climate change is mostly caused by anthropogenic production of greenhouse gases, which are pollutants) but for this system and its intended uses, health effects are definitely more prominent. Human health implications of a polluted atmosphere are documented in very numerous studies throughout the literature. In this document, I will only present a small number of representative reviews and reports.

In 2004, [WHO](#) published a report summarizing what was then the most recent information on health effects of air pollution over Europe. This review concluded that, even with all the regulations on [AP](#) put in place by the European authorities, its levels were still posed a considerable burden on health throughout Europe [19].

Although there are several hundred potentially harmful components already that have already been found in the atmosphere, this report addresses only [PM](#), ground level Ozone and Nitrogen Dioxide. As many other studies had found, this Systematic Literature Review ([SLR](#)) identified several short-term and long-term exposure effects for the three pollutants. The study found that short-term exposure to all three substances were responsible for an increase in mortality and hospital admissions, and that both [PM](#) and O_3 increased the population's usage of medication. Long-term exposure to all three components have adverse pulmonary effects, but [PM](#) have many other negative effects. The most important of them a reduction in life expectancy, which the authors attribute to cardiopulmonary mortality and lung cancer.

Particulate Matter are described as airborne solid particles or droplets. These

particles vary in size, origin and composition, however, it is usual to classify them by size, since that is what governs particle deposition in the respiratory system. Urban **PM** are usually divided into three categories: coarse, fine and ultrafine. Convention dictates that coarse particles have an aerodynamic diameter of less than $10\mu\text{m}$ (PM_{10}), fine particles less than $2.5\mu\text{m}$ ($\text{PM}_{2.5}$). In this review, the authors stated that the role that ultrafine particles play in human health is still undetermined, but they noted that coarse and (especially) fine particles are highly correlated with an increase in mortality and the prevalence of respiratory syndromes [19].

Ground-level ozone is produced as a result of a chemical reaction between nitrous oxides and Volatile Organic Compounds (**VOC**), which can be emitted either by natural source or by human-related activities. O_3 is a powerful oxidant, and can easily accept electrons from other molecules. In the respiratory tract, this chemical destroys double bonds of the fatty acids in the surface of its lining. The process leads to the deposition of several substances like aldehydes and hydrogen peroxide, resulting in impaired cell function. Ozone is toxic at concentrations that occur in urban areas around the world. On a more ecological level, it has been established that O_3 is responsible for a decrease in the trees' capabilities to assimilate carbon, which can result in deforestation.

Nitrous Oxides originate from the use of Internal Combustion Engines (**ICE**) for energy production and especially movement. It is usually used as an indicator for the presence of heavy traffic. The compound acts in a more subtle way than Ozone, described above. It increases the risk of respiratory infections and can cause pulmonary edema. Moreover, it has an effect on the immunological system, impairing the ability of T-lymphocytes to address microbiological threats like viruses. Nitrous oxides are also known to affect weaker populations, like children and the elderly.

3.2 Tomographic algorithms and reconstruction techniques

3.2.1 Introduction

Tomography is the cross-sectional imaging of an object through the use of transmitted or reflected waves, captured by the object exposure to the waves from a set of known angles. It has many different applications in science, industry, and most prominently, medicine. Since the invention of the Computed Tomography (**CT**) machine in 1972, by Hounsfield [5], tomographic imaging techniques have had a revolutionary impact, allowing doctors to see inside their patients, without having to subject them to more invasive procedures [9].

Mathematical basis for tomography were set by Johannes Radon in 1917. At the time, he postulated that it is possible to represent a function written in \mathbb{R} in the space of straight lines, \mathbb{L} through the function's line integrals. A line integral is an integral in which the function that is being integrated is evaluated along a curved path, a line.

In the tomographic case, these line integrals represent a measurement on a ray that traverses the Region Of Interest (ROI). Each set of line integrals, characterized by an incidence angle, is called a projection (see Figure 3.1). To perform a tomographic reconstruction, the machine must take many projections around the object. To the set of projections arranged in matrix form by detector and projection angle, we call sinogram. All reconstruction methods, analytical and iterative, revolve around going from reality to sinogram to image [1, 3, 6–9].

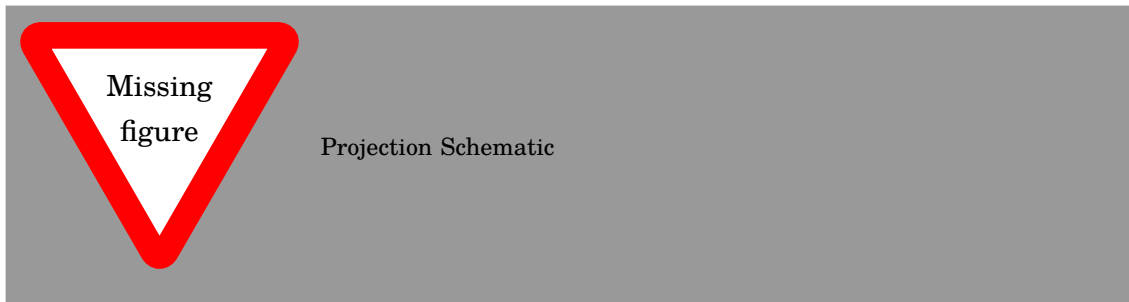


Figure 3.1: A schematic representation of a projection.

There are two broad algorithm families when it comes to tomographic reconstruction, regarding the physics of the problem. The problem can involve either non-diffracting sources (light travels in straight lines), such as the X-Rays in a conventional CT exam; or diffracting sources, such as micro-waves or ultrasound in more research-oriented applications. In this document, I will not address the latter family, since I will not be applying them in my work. In the next few paragraphs, I will discuss the first family of algorithms, and describe how an image can be reconstructed from an object’s projections when the radiation source is non-diffracting.

Let’s consider the case in which we deal with a single ray of solar light entering the atmosphere at a given point. Since the atmosphere contains numerous absorbents and comparable atmospheric effects, the ray changes from the point where it enters the atmosphere to the point at which it is measured by a detector. Total absorption will depend on the pollutant species, their cross-section and their concentration, since it obeys Lambert-Beer’s law. Looking from another angle, this absorption is also the line integral that we will use to reconstruct our image. With DOAS, it is possible to measure several pollutants at the same time, but for simplicity (and since it is one of the most studied compounds in the field), let’s consider that the single pollutant in our atmospheric mixture is NO_2 .

3.2.2 Initial Considerations

The problem of tomographic reconstruction can be approached in a number of ways, depending mostly on the authors. In my literary search, I have found that Kak and Slaney [9] have certainly explained this problem in one of the clearer ways available.

Therefore, I shall base the rest of my presentation in their writings, and complement with other authors' notes wherever necessary.

Considering the coordinate system displayed in Figure 3.2. In this schematic, the object is represented by the function $f(x, y)$. The (θ, t) parameters can be used to define any line in this schematic. Line AB in particular can be written:

$$x \cdot \cos(\theta) + y \cdot \sin(\theta) = t \quad (3.1)$$

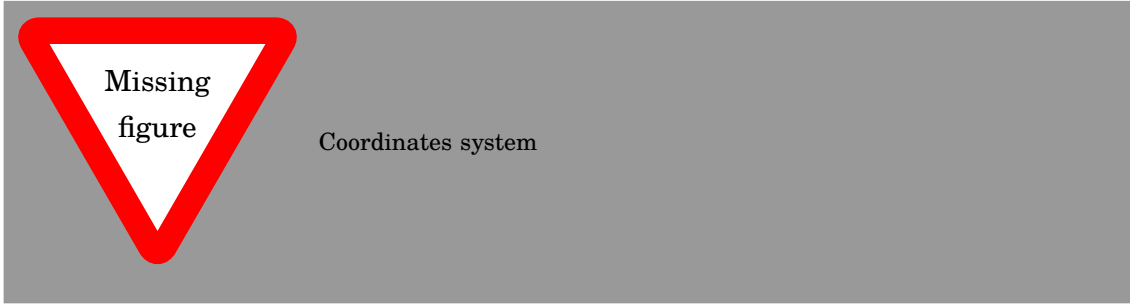


Figure 3.2: Schematic representation for coordinate setting.

And if we were to write a line integral along this line, it would look like Equation 3.2, the Radon transform of function $f(x, y)$:

$$P_{\theta}(t) = \int_{-\infty}^{\infty} f(x, y) \cdot \delta(x \cdot \cos(\theta) + y \cdot \sin(\theta) - t) dx dy \quad (3.2)$$

Where δ , the delta function, is defined in Equation 3.3.

$$\delta(\phi) = \begin{cases} 1, & \phi = 0 \\ 0, & \text{otherwise} \end{cases} \quad (3.3)$$

As I have mentioned previously, a projection is a set of line integrals such as $P_{\theta}(t)$. Geometry plays a very important role in how the integrals are written and solved for reconstruction. The simplest case is the one where the set is acquired in a row, describing what is called a parallel geometry. Another more complex case is when a single point source is used as origin for all rays, forming a fan. This is called a fanbeam array. There are other possible geometries, but they fall out of the scope of this work and will therefore not be addressed any further.

3.2.3 The Fourier Slice Theorem

The Fourier Slice Theorem (**FST**) is the most important component of the most important algorithm in tomographic inversion, the Filtered BackProjection algorithm (**FBP**). **FST** is based on the equality relation between the two-dimensional Fourier Transform (**FT**) of the object function and the one-dimensional **FT** of the object's projection at an

angle θ . Let's start by writing the 2D **FT** for the object function, Equation 3.4, and the 1D **FT** of projection P_θ , in Equation 3.5.

$$F(u, v) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f(x, y) \cdot \exp[-j2\pi(ux + vy)] dx dy \quad (3.4)$$

$$S_\theta(\omega) = \int_{-\infty}^{\infty} P_\theta \cdot \exp[-j2\pi\omega t] \quad (3.5)$$

For simplicity, let's consider the 2D **FT** at the line defined by $v = 0$ in the frequency domain. We rewrite the 2D **FT** integral as:

$$F(u, 0) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f(x, y) \cdot \exp[-j2\pi\omega ux] dx dy \quad (3.6)$$

Notice that y is not present in the phase factor of the **FT** expression anymore, and this means we can rearrange the integral as:

$$F(u, 0) = \int_{-\infty}^{\infty} \left[\int_{-\infty}^{\infty} \mathbf{f}(\mathbf{x}, \mathbf{y}) d\mathbf{y} \right] \cdot \exp[-j2\pi\omega ux] dx \quad (3.7)$$

Now, the **bold** part of Equation 3.7 is similar to Equation 3.2. It is precisely that equation, considering $\theta = 0$ and a constant value of x , as in Equation 3.8.

$$P_{\theta=0}(x) = \int_{-\infty}^{\infty} f(x, y) dy \quad (3.8)$$

This in turn can be substituted in Equation 3.7, finally arriving at:

$$F(u, 0) = \int_{-\infty}^{\infty} P_{\theta=0}(x) \cdot \exp[-j2\pi ux] dx \quad (3.9)$$

And this is the one-dimensional **FT** for the projection at angle $\theta = 0$. Finally, the enunciation of the Fourier Slice Theorem:

The Fourier Transform of a parallel projection of an image $f(x, y)$ taken at angle θ gives a slice of the two-dimensional Fourier Transform, $F(u, v)$, subtending an angle θ with the u -axis (see Figure 3.3)

3.2.4 The Filtered BackProjection Algorithm

3.2.4.1 The rationale for **FBP**

If one takes the **FST** into account, the idea behind the **FBP** seems to appear almost naturally. Say one has a single projection and its Fourier transform. From the **FST**, this projection is the same as the object's two-dimensional **FT** in a single line. A crude reconstruction of the original object would result if someone were to place this projection in its right place in the Fourier domain and then perform a two-dimensional **IFT**, while assuming every other projection to be 0. The result, in the image space, would be as if someone had smeared the object in the projections direction.

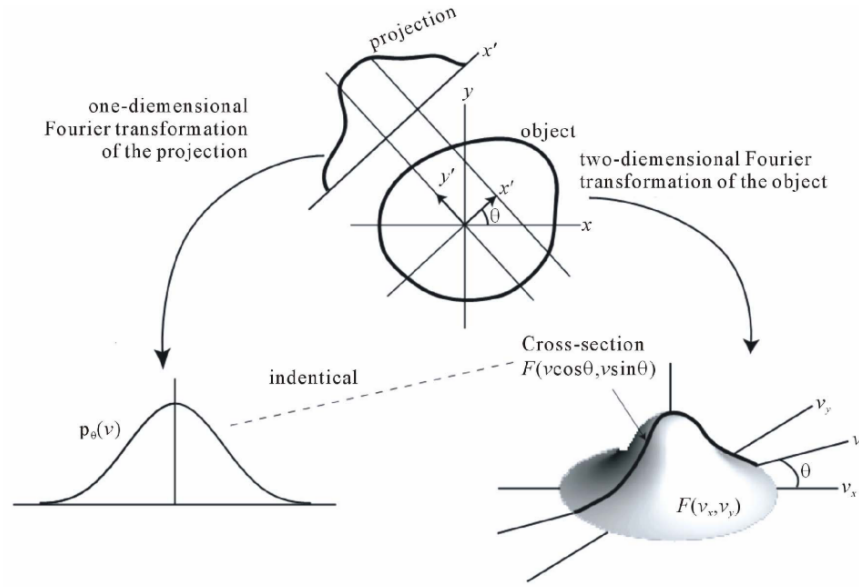


Figure 3.3: The **FST**, a schematic representation.

What is really needed for a correct reconstruction is to do this many times, with many projections. This brings a problem with the method: smearing the object in all directions will clearly produce a wrong *accumulation* in the center of the image, since every projection passes through the middle (remember we are still talking about parallel geometry projections) and are summed on top of each other, but on the outer edges, this does not occur. If one does not address this, the image intensity levels in the reconstructed image will be severely overestimated in the center and underestimated in the edges (due to normalization). The solution is conceptually easy: we multiply the Fourier transform by a weighting filter proportional to its frequency (ω) and that encompasses its relevance in the global scheme of projections. If there are K projections, then it is adequate for this value to be $\frac{2\pi|\omega|}{K}$. As an algorithm, **FBP** can be written as in Algorithm 1.

Algorithm 1 The Filtered BackProjection Algorithm

```

for all  $\theta, \theta \in \{0..180, \frac{180}{K}\}$  do
  Measure projection  $P_\theta(t)$ ;
  FT( $P_\theta(t)$ ), rendering  $S_\theta(\omega)$ 
  Multiply by  $\frac{2\pi|\omega|}{K}$ ;
  Sum the IFT of the result in the image space.
end for

```

3.2.4.2 Fan Projections Reconstruction

Parallel projections, in which the object is scanned linearly from multiple directions, have the advantage of having a relatively simple reconstruction scheme. However, they

usually result in acquisition times which are in the order of minutes. A faster way of collecting the data is one where all radiation emanates from a single point-source, which rotates around the target object (as well as the detectors). There are two types of fan beam projections: equiangular and equally spaced. In this project, I have only worked with equiangular processes, so I will not include an explanation for equally spaced fan beam projections. The reader may find this well described (much better than I would be able to) in [9] and [8].

Consider Figure 3.4. If our projection data were acquired through a parallel ray geometry, we would be able to say that ray SA belonged to a projection $P_\theta(t)$, in which θ and t would be written:

$$\theta = \beta + \gamma \quad \text{and} \quad t = D \cdot \sin \gamma \quad (3.10)$$

In Equation 3.10, D is the distance between the source S and the origin O ; γ is the angle of a ray within a fan and β is the angle that the source S makes with a reference axis.

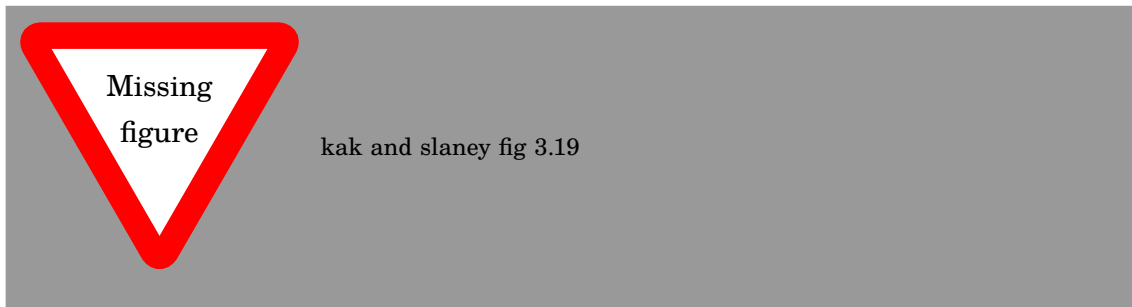


Figure 3.4: Schematic representation of an equiangular fan beam projection.

3.3 DOAS

3.4 DOAS tomography

As mentioned in Section 3.3, DOAS is an atmospheric analysis technique based on absorption spectroscopy, which is able to quantify several trace gases. The technique yields Slant Column Densities (SCD) for each gas, which essentially correspond to line integrals of the absorption of each target species. Hence, it is possible to acquire a number of these measurements, from different angles, and with them run one of the algorithms presented in Section 3.2 to reconstruct an image, which will be equivalent to a map of the target components concentrations.

DOAS tomography is a relatively new field of study, with the first experiments being made in the beginning of the current century, namely in Germany, with the BAB-II campaign [11, 13]. In this studies, a Long Path DOAS (active DOAS) setup was built using two telescopes and two retroreflector arrays positioned onto two towers that

were constructed alongside the A656 motorway, between Heidelberg and Mannheim. These researchers used a SART approach to reconstruct the image from the acquired 16 projections. Their findings were in agreement with the mathematical models of the time [13].

More recently, Stutz and his team have built and used a similar setup to study the atmospheric profiles of aromatic hydrocarbons near an refinery plant, in Texas [14]. Their system was composed of a dual-light emitting diode light source, a telescope which acted as emitter and receiver of light and retroreflector arrays, positioned strategically in the geographic region that was being studied. The study was conducted at the same time as another, which tried to make the same analysis using in-situ monitoring [12]. At the time, both studies were shown to be in agreement, validating the tomographic system.

3.4.0.1 Long-Path DOAS Tomography applications

3.4.0.2 Passive DOAS tomography for volcanic plume studies

Research Methodology

4.1 Aimed contribution

This work aims to answer its main [RQ](#) by following and pursuing the proposed hypothesis (see [Section 2.3](#)). In doing so, I will contribute with a commercially viable (from a technical perspective) atmospheric monitoring system based on DOAS, capable of not only measuring pollutant contamination but also mapping their concentration in a given geographic region. This will generate several intermediate steps, which are themselves smaller contributions:

The first intermediate step will be the development of a tomographic strategy. This will of course include the selection of a sampling geometry (consider the ones presented in [Section 3.2](#)), but also the positioning of "sources and sensors" within the selected geometry. Since the system is designed to be a passive DOAS device (see [Section 3.3](#)), careful consideration must be taken in this respect. Spectral acquisition must be done in a way that allows tomographic reconstruction, but also respecting limitations and particularities that come from working with solar light. This step corresponds to answering the first secondary Research Question (see [Table 2.2](#)).

The next step will be to write a simulation tool for the tomographic procedure. The idea is for this tool to encompass the acquisition strategy that was defined in the previous step, in order to replicate the whole measurement process and then perform the reconstruction using one or more algorithms. The simulation tool has several functions. For one, it allows the fine-tuning of the approaches without having to expend any resources in purchasing material. Besides this, it also gives gives researchers the chance to experiment with different algorithms. The routine will be divided into two modules. The first module computes the projections for a given phantom, and the second performs the reconstruction with the projection data. The point is that one can write a tomographic reconstruction routine and plug it to the projection computation module, without any interference from one to the other.

Finally we reach the instrumentation definition phase. In this stage, I will have to select the optical components necessary to build this system, including telescope,

spectrometer and all the connection components. In order to maintain this system as small as possible, I will try to avoid using optical fibers, thus minimizing energy loss between telescope and spectrometer. In this stage, I will also have to design a mechanical support that allows a drone to be equipped with the optical system, respecting all positioning and pointing requirements that such a device must entail.

4.2 Detailed work plan and scheduling

In this section, I will present the work plan that was defined and is being followed while conducting the work of the proposed thesis. I will start by Figure 4.1, a low resolution Gantt chart. This chart is comprised of the more high level tasks, which coarsely follow the previously detailed approaches and contribution goals (see 4.1 and 2.3). We can see that there are two main milestones, which correspond to the publication moments. The first of these milestones was reached in 2017, with the publication of [15].

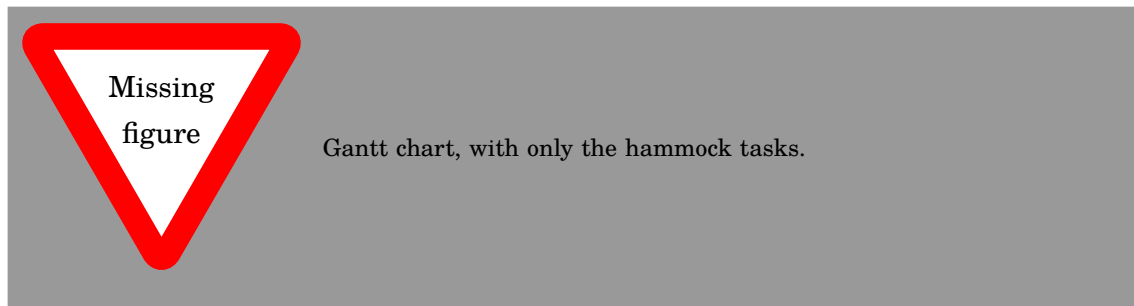


Figure 4.1: Low resolution Gantt chart for the present thesis.

Figure 4.2, Figure 4.3, Figure 4.4 and Figure 4.5 are the same Gantt chart presented in Figure 4.1, but they are *zoomed in* to each task of the project.



Figure 4.2: Zoomed Gantt chart for task 1 -

4.3 Validation methodology

There are several ways to validate a piece of work as the one I present here. It is important to do this in more than one, to ensure not only the validity of the project, but also its relevancy.



Figure 4.3: Zoomed Gantt chart for task 1 -



Figure 4.4: Zoomed Gantt chart for task 1 -



Figure 4.5: Zoomed Gantt chart for task 1 -

Before going any further, I should mention that although my project was conducted as part of the pursuit of a doctoral degree, it was not a traditional PhD, in the sense that it was not done solely in a University setting. The grant that I was awarded by the Portuguese Foundation for Science and Technology was part of a PhD Program for degrees conducted in partnership between FCT NOVA and a group of companies, named NOVA Instrumentation for Health (NOVA I4H). This is relevant as it indicates that there is at least a commercial interest in developing the technology I propose with this thesis (a market validation of sorts). Otherwise, the project would not be viable for the company.

One important way in which I will validate this project is by publishing in significant peer reviewed publications. As illustrated in Figure 4.1, during the course of my PhD, I intend to publish two relevant articles in Web-of-Science-indexed publications. The first of these was published in 2017, at the end of the preliminary studies stage

of the project. The second is currently in the finishing stages of writing and should be submitted before the end of September. Conference-wise, I plan to introduce my work to the scientific community in 2020, by participating in at least one acknowledged conference in the remote sensing or atmospheric monitoring community. Table ?? summarizes the project's dissemination plan.

Table 4.1: Dissemination plan for the PhD Project.

4.4 Integration with other research activities

As stated in Section 1.1, this project started as a direct evolution from the Forest Fire Finder system, an autonomous forest fire detection device. In 2017, NGNS-IS (the birthplace of FFF) was absorbed by the Compta group, and FFF became Bee2Fire. As an extension to the Bee2Fire, this project is integrated in Compta's research efforts, namely in the remote sensing and artificial intelligence department.

In addition to this, the present work is supported by the Portuguese Foundation for Science and Technology, through the NOVA I4H PhD Program (grant reference: PDE/BDE/114549/2016).

Bibliography

- [1] P. P. Bruyant. “Analytic and iterative reconstruction algorithms in SPECT.” In: *Journal of nuclear medicine : official publication, Society of Nuclear Medicine* 43.10 (2002), pp. 1343–58. ISSN: 0161-5505. URL: <http://jnm.snmjournals.org/cgi/content/abstract/43/10/1343%7B%5C%%7D5Cnhttp://jnm.snmjournals.org/cgi/content/full/43/10/1343%7B%5C%%7D5Cnhttp://www.ncbi.nlm.nih.gov/pubmed/12368373>.
- [2] M. Carugno, D. Consonni, G. Randi, D. Catelan, L. Grisotto, P. A. Bertazzi, A. Biggeri, and M. Baccini. “Air pollution exposure, cause-specific deaths and hospitalizations in a highly polluted Italian region.” In: *Environmental Research* 147 (May 2016), pp. 415–424. ISSN: 00139351. DOI: 10.1016/j.envres.2016.03.003. URL: <https://linkinghub.elsevier.com/retrieve/pii/S0013935116300834>.
- [3] M. Defrise, P. E. Kinahan, and C. J. Michel. “4 Image Reconstruction Algorithms in PET * 2D Data Organization.” In: (2003), pp. 91–114.
- [4] A. Ghorani-Azam, B. Riahi-Zanjani, and M. Balali-Mood. “Effects of air pollution on human health and practical measures for prevention in Iran.” In: *Journal of Research in Medical Sciences* 21.1 (2016), p. 65. ISSN: 1735-1995. DOI: 10.4103/1735-1995.189646. URL: <http://www.jmsjournal.net/text.asp?2016/21/1/65/189646>.
- [5] R. Gunderman. *Essential Radiology: Clinical Presentation, Pathophysiology, Imaging, 2nd ed.* 2nd ed. Thieme, 2006. ISBN: 9781588900821.
- [6] G. T. Herman. “Image Reconstruction From Projections.” In: *Real-Time Imaging* 1.1 (1995), pp. 3–18. ISSN: 10772014. DOI: 10.1006/rtim.1995.1002.
- [7] G. T. Herman. *Fundamentals of Computerized Tomography*. Advances in Pattern Recognition. London: Springer London, 2009. ISBN: 978-1-85233-617-2. DOI: 10.1007/978-1-84628-723-7. URL: <http://link.springer.com/10.1007/978-1-84628-723-7>.

BIBLIOGRAPHY

- [8] G. T. Herman, A. Lent, and S. W. Rowland. “ART: Mathematics and applications. A report on the mathematical foundations and on the applicability to real data of the algebraic reconstruction techniques.” In: *Journal of Theoretical Biology* 42.1 (1973). ISSN: 10958541. DOI: [10.1016/0022-5193\(73\)90145-8](https://doi.org/10.1016/0022-5193(73)90145-8).
- [9] A. Kak and M. Slaney. *Principles of Computerized Tomographic Imaging*. Society of Industrial and Applied Mathematics, 2001.
- [10] M. Kampa and E. Castanas. “Human health effects of air pollution.” In: *Environmental Pollution* 151.2 (Jan. 2008), pp. 362–367. ISSN: 02697491. DOI: [10.1016/j.envpol.2007.06.012](https://doi.org/10.1016/j.envpol.2007.06.012). URL: <https://linkinghub.elsevier.com/retrieve/pii/S0269749107002849>.
- [11] T. Laepple, V. Knab, K.-U. Mettendorf, and I. Pundt. “Longpath DOAS tomography on a motorway exhaust gas plume: numerical studies and application to data from the BAB II campaign.” In: *Atmospheric Chemistry and Physics Discussions* 4.3 (2004), pp. 2435–2484. ISSN: 1680-7375. DOI: [10.5194/acpd-4-2435-2004](https://doi.org/10.5194/acpd-4-2435-2004). URL: <http://www.atmos-chem-phys-discuss.net/4/2435/2004/>.
- [12] E. P. Olaguer. “Overview of the Benzene and Other Toxics Exposure (BEE-TEX) Field Study.” In: *Environmental Health Insights* 9s4 (Jan. 2015), EHI.S15654. ISSN: 1178-6302. DOI: [10.4137/EHI.S15654](https://doi.org/10.4137/EHI.S15654). URL: <http://journals.sagepub.com/doi/10.4137/EHI.S15654>.
- [13] I. Pundt, K. U. Mettendorf, T. Laepple, V. Knab, P. Xie, J. Lösch, C. V. Friedeburg, U. Platt, and T. Wagner. “Measurements of trace gas distributions using Long-path DOAS-Tomography during the motorway campaign BAB II: Experimental setup and results for NO₂.” In: *Atmospheric Environment* 39.5 (2005), pp. 967–975. ISSN: 13522310. DOI: [10.1016/j.atmosenv.2004.07.035](https://doi.org/10.1016/j.atmosenv.2004.07.035).
- [14] J. Stutz, S. C. Hurlock, S. F. Colosimo, C. Tsai, R. Cheung, J. Festa, O. Pikelnaya, S. Alvarez, J. H. Flynn, M. H. Erickson, and E. P. Olaguer. “A novel dual-LED based long-path DOAS instrument for the measurement of aromatic hydrocarbons.” In: *Atmospheric Environment* 147 (Dec. 2016), pp. 121–132. ISSN: 13522310. DOI: [10.1016/j.atmosenv.2016.09.054](https://doi.org/10.1016/j.atmosenv.2016.09.054). URL: <http://linkinghub.elsevier.com/retrieve/pii/S1352231016307713>.
- [15] R. Valente de Almeida and P. Vieira. “Forest Fire Finder – DOAS application to long-range forest fire detection.” In: *Atmospheric Measurement Techniques* 10.6 (June 2017), pp. 2299–2311. ISSN: 1867-8548. DOI: [10.5194/amt-10-2299-2017](https://doi.org/10.5194/amt-10-2299-2017). URL: <https://www.atmos-meas-tech.net/10/2299/2017/>.
- [16] D. Vallero. *Fundamentals of air pollution*. 5th ed. Academic Press, 2014. ISBN: 9780124017337.
- [17] P. Vieira and J. Matos. *SYSTEM FOR AUTOMATIC DETECTION OF FOREST FIRES THROUGH OPTIC SPECTROSCOPY*. 2008.

- [18] P. Vieira, J. Matos, and M. Mendes. *Sistema para a detecção automática de incêndios florestais por espectroscopia óptica*. 2007.
- [19] World Health Organisation Europe. "Health Aspects of Air Pollution Results from the WHO Project "Systematic Review of Health Aspects of Air Pollution in Europe"." In: *World Health* (2004), p. 30.

