plain: one accumulator per row



1 MAC per add latency

4-way unroll: four rows, four independent chains

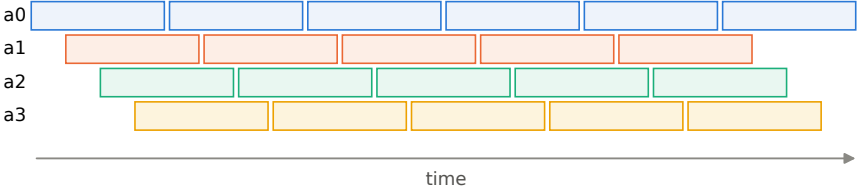

4 MACs per add latency