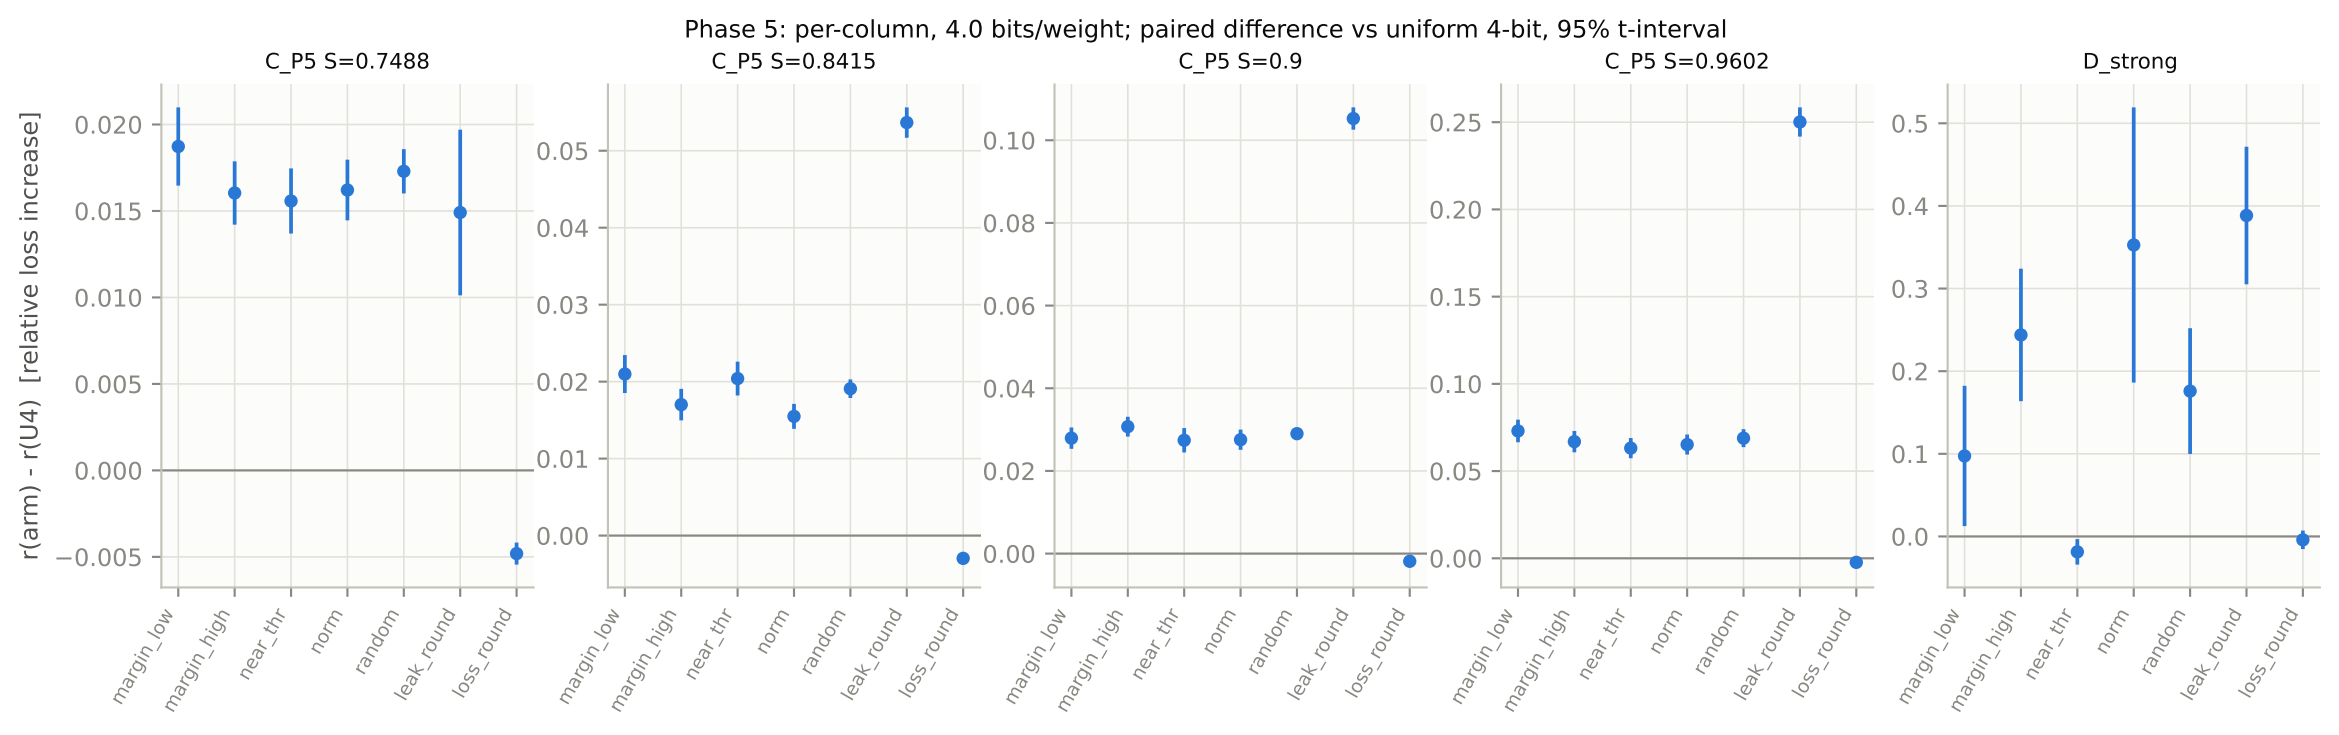
Phase 5: per-column, 4.0 bits/weight; paired difference vs uniform 4-bit, 95% t-interval
C_P5 S=0.7488
C_P5 S=0.8415
C_P5 S=0.9
C_P5 S=0.9602
D_strong
r(arm) - r(U4) [relative loss increase]
margin_low
margin_high
near_thr
norm
random
leak_round
loss_round