


3D cameras for pallets, vehicles and containers

Large scenes at 1.2 to 3.5 m from a bar above the dock, the cell or the conveyor; a color image registered to every point.

PRELIMINARY · VISION 2026

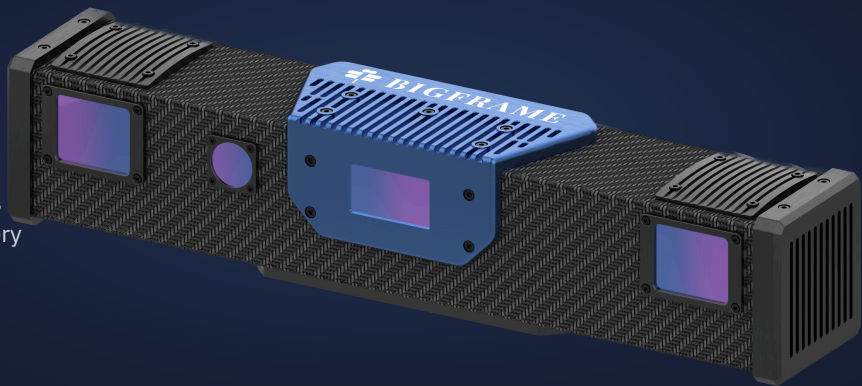

2.56 × 2.06 m

field of view at 2.5 m

1.30 × 1.05 m at 1.2 m; 3.60 × 2.91 m at 3.5 m.

1.2–3.5 m

working distance

2.3 m measuring depth from one fixed mount; 450 mm bar, 3.5 kg, above the scene.


300 μm

Z repeatability ¹

With 1400 μm point spacing at 2.5 m; two 5 MP cameras, RGB image, 1 fps.

The PRS covers the largest scenes in the range — a pallet, a vehicle, a container, a stack on a dock — from one capture, with the color image the operator needs to see what was measured.

The PRS in use

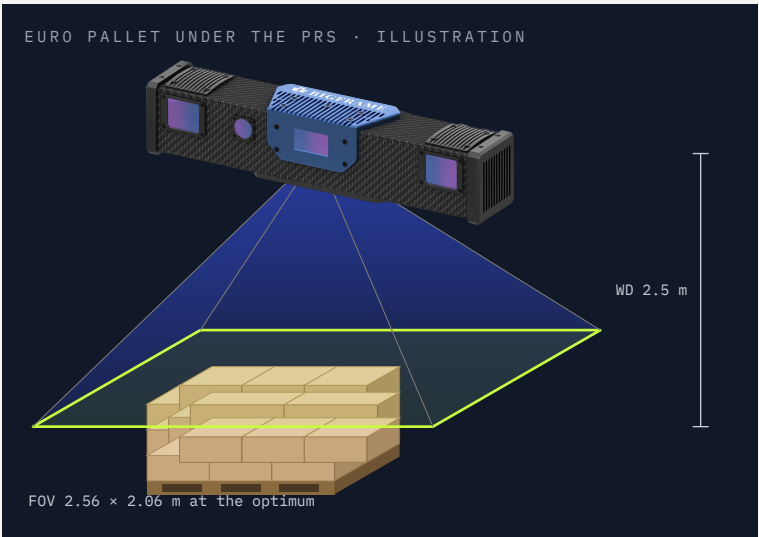

At 2.5 m the field of view of 2.56 × 2.06 m covers a Euro pallet with margin; layer height and carton positions come from one capture.

Which large-scene camera?

Choose the VR-2300B where the finest point spacing at 2 to 4 m matters and no color image is needed; the VRD-1200B for a camera on the arm; the PRS where a scene of 2 m or more must be covered from a fixed mount with a color image.

The PRS-2500B is specified at three working distances from 1.2 to 3.5 m (table on page 14); at 3.5 m the field of view of 3.60 × 2.91 m covers a container door with margin; at 1.2 m it is 1.30 × 1.05 m.

Large-scene cameras compared

Model	Field of view at optimum WD (mm)	Working distance near / optimum / far (mm)	XY point spacing (μm)	Z repeatability 2σ (μm)	Color image	Mounting
VR-1300B	865 × 645	900 / 1500 / 2200	420	60	No	fixed, above the scene
VR-2300B	1500 × 1115	1900 / 2600 / 3800	730	100	No	fixed, above the scene
VRD-1200B	1166 × 731	900 / 1200 / 1600	480	24	Yes	robot arm
PRS-2500B ¹	2560 × 2060	1200 / 2500 / 3500	1400	300	Yes	fixed, above the scene

¹ PRS: preliminary specification; Z repeatability 300 μm, method to be stated at launch.