
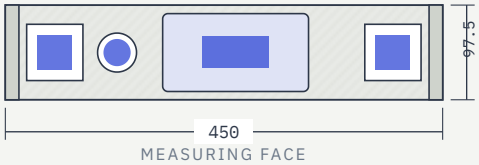


PRS series: technical data

PRS series

NEW

Model	PRS-2500B
Working distance near / optimum / far (mm)	1200 / 2500 / 3500
Field of view at 1200 / 2500 / 3500 mm, W × H (mm)	1300 × 1050 / 2560 × 2060 / 3600 × 2907
Measuring depth, Z range (mm)	2300
XY point spacing at 1200 / 2500 / 3500 mm (μm)	680 / 1400 / 2000
Z repeatability (μm) ¹	300
Camera resolution	2448 × 2048 pixels, 5 MP, 2 cameras
Frame rate	1 fps at full resolution
Optical configuration	Two cameras, stereo baseline approx. 350 mm; laser pattern projector; RGB camera
Light source	Red laser, 638 nm
Laser class	Stated at launch
Color image output	RGB image registered to the point cloud
Data interface	Gigabit Ethernet
Power	24 V DC, up to 4 A
Operating temperature	0 to 45 °C
Dimensions L × W × H (mm)	450 × 97.5 × 95
Weight (kg)	3.5
Software	TridiVision

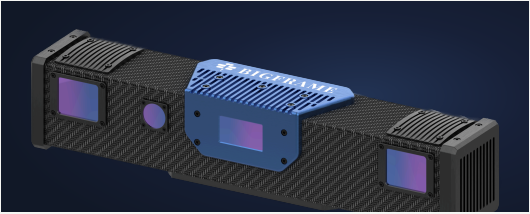


PRS, measuring face; housing 450 × 97.5 × 95 mm, camera windows at both ends, RGB camera and laser projector module between them.

By working distance

WD (mm)	Field of view (mm)	XY point spacing (μm)
1200 near	1300 × 1050	680
2500 opt.	2560 × 2060	1400
3500 far	3600 × 2907	2000

Preliminary specification; final data sheet at launch. ¹ Method to be stated at launch. Dimensions over the housing, connectors excluded.

Field of view and point spacing against working distance

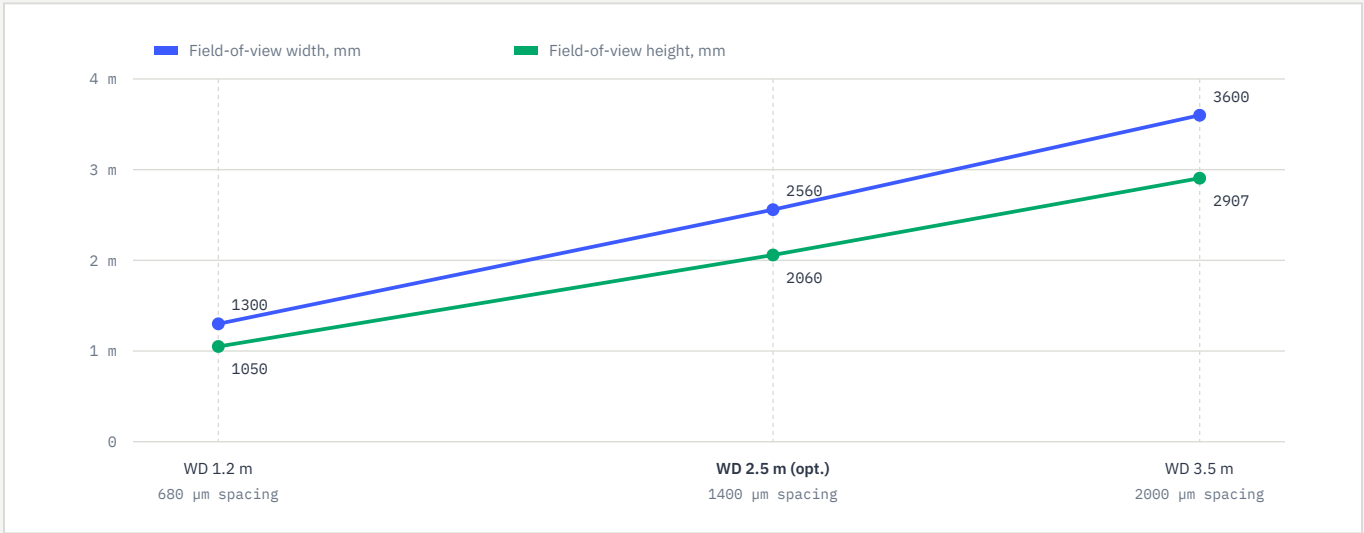

Field-of-view width and height at the three specified working distances, with the XY point spacing under each. At 2.5 m the field of view covers a Euro pallet with margin; at 3.5 m it covers a container door.