


HYUNDAI ELECTRONICS, INC.

SUPER - 16 T E

Processor	8088
Processor Speed	10MHz
Chip Set	None
Max. Onboard DRAM	640KB
Cache	None
BIOS	Hyundai
Dimensions	355mm x 304mm
I/O Options	Parallel port, serial port, floppy drive interface
NPU Options	8087

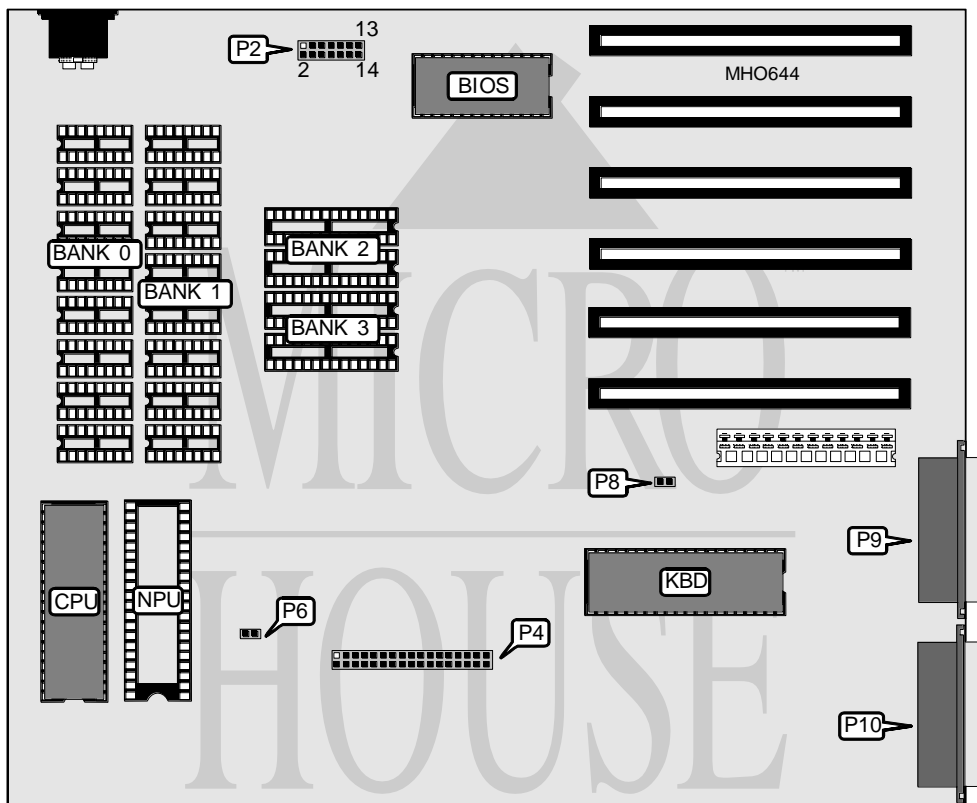

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy drive interface	P4	Parallel port	P9
Power LED	P6	Serial port	P10
Speaker	P8		

Continued on next page . . .

HYUNDAI ELECTRONICS, INC.

SUPER-16TE

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU disabled	P2 pins 1 & 2	Closed
NPU enabled	P2 pins 1 & 2	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(8) 41256	(8) 41256	NONE	NONE
640KB	(8) 41256	(8) 41256	(2) 4464	(2) 4464

DRAM JUMPER CONFIGURATION	
Size	P2
512KB	pins 3 & 4 closed
640KB	pins 5 & 6 closed

MONITOR CONFIGURATION	
Type	P2
Color	pins 7 & 8 closed
Monochrome	pins 9 & 10 closed

BIOS CONFIGURATION	
Size	P2
27256	pins 11 & 12 closed
27128	pins 13 & 14 closed