



(a) speedupdown se come el tramo recto

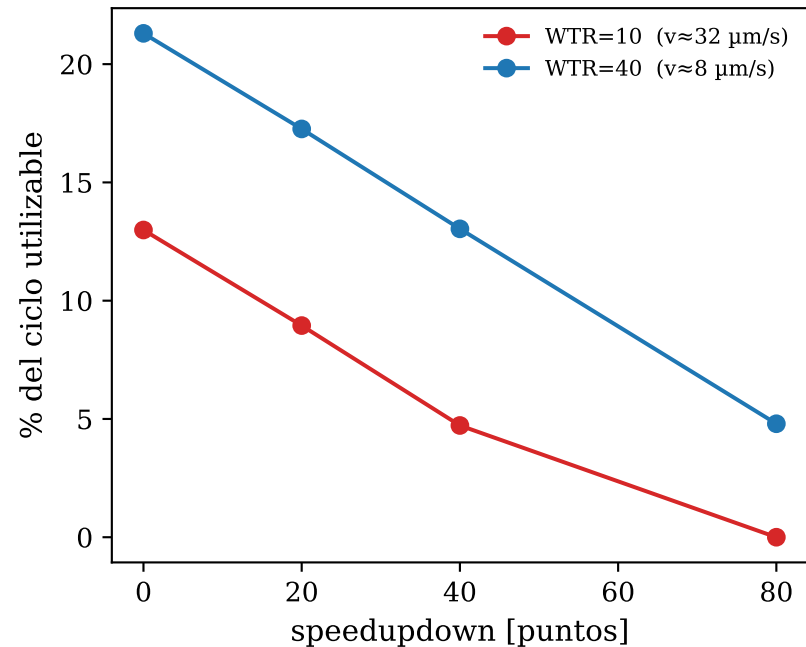

(b) dentro de la zona usable el paso es uniforme al nivel del ruido, en TODAS las configuraciones

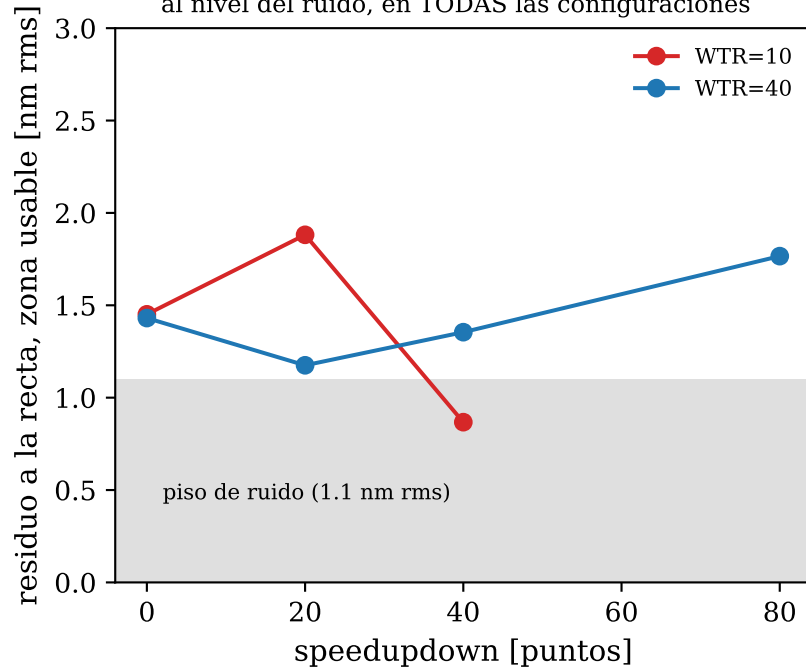

(c) speedupdown=80 fijo: alargar la tabla recupera la zona usable

N tabla	v [μm/s]	acel [ms]	v cte [ms]	usable [ms]	frac usable	residuo [nm]
400.0	42.47	98.32	24.8	0.0	0.0	nan
800.0	15.69	99.04	104.36	68.0	0.21	1.0
1600.0	6.96	52.32	264.24	227.88	0.7	1.88