




Premium Coating
Reliable Partner

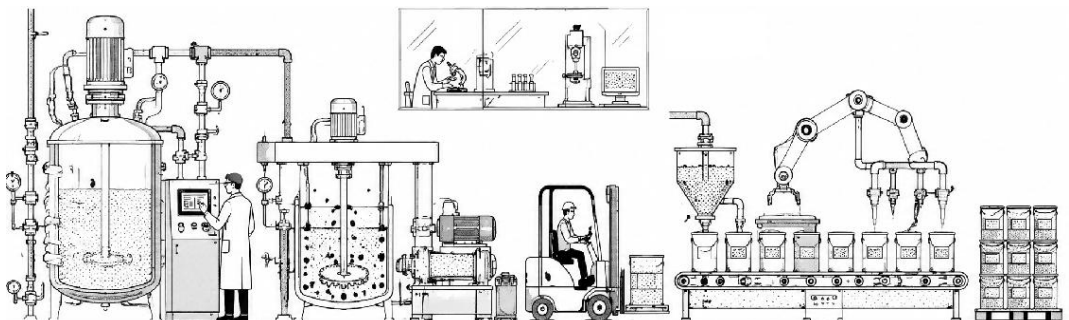

<https://www.urbvo.com/>

WATER-BASED ACRYLIC 4H FLOOR COATING

Product Description

DP01 Water-Based Acrylic 4H Floor Coating is an eco-friendly flooring solution that uses water as a diluent, making it non-toxic, odorless, and environmentally safe. It offers fast drying, exceptional substrate adhesion, and outstanding weather resistance. Available in vibrant, long-lasting colors, it's easy to apply. When paired with the matching 4H overlay varnish, this system delivers a surface hardness of up to 4H and a high-gloss finish. Ideal for both indoor and outdoor flooring applications.

Performance Characteristics

- Eco-Friendly & Safe: Water-based formulation uses water as a diluent. Non-toxic, non-irritating, and odorless – safe for people and the environment.
- Superior Weather Resistance: Formulated with high-performance UV-stable pigments to withstand prolonged exposure to sunlight, rain, and temperature fluctuations. Ideal for outdoor durability.
- Easy Application: Single-component system. Requires no complex mixing ratios, simplifying procedures and reducing labor time/costs.
- Rapid Drying & Strong Adhesion: Fast-drying formula bonds tightly to substrates, allowing for quicker return-to-service times after application.
- Exceptional Surface Hardness (System Performance): When applied with the matching primer and 4H overlay varnish, achieves a surface hardness rating of up to 4H and a high-gloss finish.


Scope of Application

Residential interiors (living rooms, balconies), Commercial spaces (offices, retail stores, showrooms), Light industrial facilities & warehouses, Outdoor hardscapes (courtyards, patios)

Technical Data

Surface drying time	≤2h
Recoating interval	≤3h
Bonding strength (MPa)	≥1.5
Adhesion (grid method)	Grade 0
Pencil hardness (abrasion)	≥4H
Acid resistance (10%H ₂ SO ₄ , 48 h)	No blistering, peeling, allowing slight discoloration
Alkali resistance (20% NaOH, 72h)	No blistering, peeling, slight discoloration allowed
Water resistance (168h)	No blistering, peeling, slight discoloration allowed, recovery after 2h
Anti-slip (dry friction coefficient)	≥0.5
Abrasion resistance (750g/500r, g)	≤0.03
Compressive strength (MPa)	≥50

Composition of Coating System

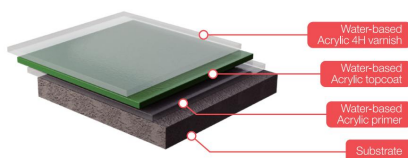

Substrate Requirements

- Strength: Surface must be smooth, solid, and free of hollow spots, loose particles, or cracks.
- Cementitious substrates: Minimum compressive strength ≥C20 (20 MPa)
- Flatness: ≤2mm under a 2m straightedge;
- Clean and dry: no oil, dust, water content <9%;
- New concrete treatment: use grinding machine to ensure solid, dry and clean;

Transportation and Storage

Storage Conditions: Must be stored between 5°C to 35°C (41°F to 95°F) at <85% relative humidity. Protect from direct sunlight, rain, and moisture.
Shelf Life: 12 months in original, unopened containers when stored under recommended conditions.

Construction Note

Always mix thoroughly before use to prevent settling.
Spray nozzle specifications: Primer & Varnish: 1.0 mm; Topcoat: 2.0–2.5 mm

Construction Dosage

Primer: 0.125kg/m²
Top coat: 0.25kg/m²
4H Varnish: 0.1kg/m²

Paint Maintenance

Curing Timeline: Light foot traffic after 72 hours; Full service (furniture/equipment) after 7 days
During Curing: Apply stain/water protection; Maintain ventilation; Extend curing period in high humidity or temperatures <15°C

Package

Option A

3 Bags in 1 Bucket



14.5kg
(For 30m²)

- **Primer:** 4kg + Acrylic floor coating 7kg+top coat: 3.5 kg = 20kg/set
- 1 sets per bucket | 36 sets per pallet

The packaging provided to dealers is sufficient to cover 30 square meters of floor space per set.

Option B

Direct Fill in 1 Bucket



20kg

- 1 sets per bucket | 36 sets per pallet

Customization

Custom unit weights, packaging formats, and private-label/OEM options are available upon request to match your market requirements and shipping efficiency.

