




Premium Coating
Reliable Partner

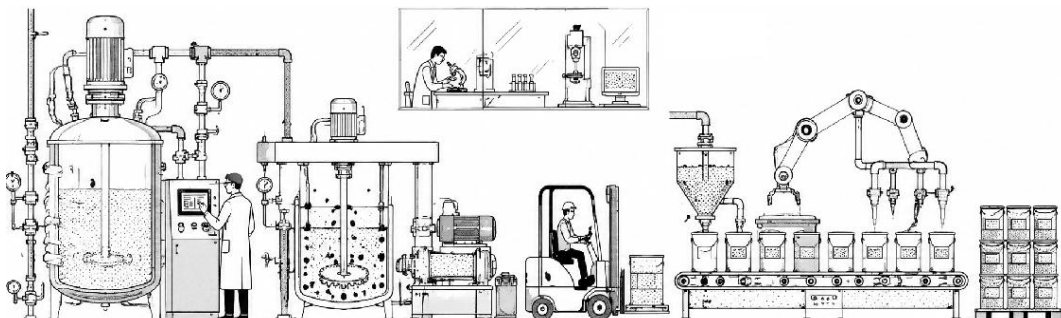

<https://www.urbvo.com/>

SOLVENT-FREE EPOXY SELF-LEVELING FLOOR COATING

Product Description

DP07 Solvent-Free Epoxy Self-Leveling Floor Coating is a high-performance resin flooring system formulated with epoxy resin and specialized curing agents. Its exceptional self-leveling properties create a seamless, mirror-finish surface (2–5mm thickness). Fully solvent-free — non-toxic, odorless, and eco-friendly. Offers outstanding adhesion, hardness, and resistance to abrasion, moisture, and chemicals. Ideal for demanding industrial and commercial environments requiring hygienic, low-maintenance floors.

Scope of Application

Commercial: Offices, shopping malls, hotels; Industrial: Plants, warehouses; Institutional: Schools, hospitals; Public Infrastructure: Underground parking garages; General: Residential interiors, basements


Performance Characteristics

- Eco-Friendly Formula: Zero VOCs, non-toxic, and pollution-free
- Exceptional Adhesion: High bond strength to substrates; minimal curing shrinkage prevents cracking
- Premium Aesthetics: Smooth, high-gloss finish with mirror effect; rich color retention
- Robust Durability: High hardness ($\geq 4H$), abrasion/impact resistant, withstands heavy loads
- Chemical Resistance: Impervious to acids, alkalis, oils, salts; dustproof, moisture-resistant, easy to clean

Technical Data

Surface drying time	$\leq 8h$
Drying time	$\leq 48h$
Initial fluidity /mm	≥ 140
Abrasion resistance (750g/500r) /g	≤ 0.03
Compressive strength (MPa)	≥ 45
Tensile bond strength	Standard condition ≥ 2.0
Impact resistance	1000g steel ball, height 100cm, coating film without cracks, no flaking
Anti-slip (dry friction coefficient)	≥ 0.5
Water resistance (168h)	No bubbling, no peeling, slight discoloration is allowed, and it will recover after 2h
Acid resistance (10% H_2SO_4 , 48 h)	No abnormalities
Oil resistance (120# solvent oil, 2h)	No abnormalities
Alkali resistance (20% NaOH, 72h)	No abnormalities

Composition of Coating System

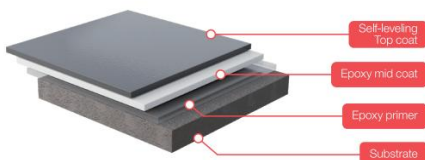

Substrate Requirements

- Strength: Surface must be smooth, solid, and free of hollow spots, loose particles, or cracks.
- Cementitious substrates: Minimum compressive strength $\geq C20$ (20 MPa)
- Flatness: $\leq 2mm$ under a 2m straightedge;
- Clean and dry: no oil, dust, water content $< 9\%$;
- New concrete treatment: use grinding machine to ensure solid, dry and clean;
- Old tile floor renovation: tile surface needs to be polished and brushed to improve adhesion.

Transportation and Storage

Storage Conditions: Must be stored between $5^{\circ}C$ to $35^{\circ}C$ ($41^{\circ}F$ to $95^{\circ}F$) at $< 85\%$ relative humidity. Protect from direct sunlight, rain, and moisture.
Shelf Life: 12 months in original, unopened containers when stored under recommended conditions.

Construction

Epoxy Primer: Apply 1 coat of high-penetration epoxy primer via roller.

DP07 Self-Leveling Topcoat: Trowel 1 coat of self-leveling epoxy evenly, use a defoaming roller to roll back and forth for defoaming treatment.

Curing Protocol: Foot Traffic: Allow ≥ 24 hrs (at $25^{\circ}C$); Heavy Loads: Allow ≥ 72 hrs; Low Temp. Warning: Extend time if $< 15^{\circ}C$.

Construction Notes

Environmental Control: Avoid application during high humidity, rain, or low ventilation conditions.

Material Handling: Thoroughly mix Parts A & B of DP07 epoxy topcoat before use; Apply within 30 minutes after mixing; Complete entire work surface in one continuous session to ensure color consistency

Construction Dosage

epoxy primer: $0.125kg/m^2$
DP07 epoxy topcoat: $1kg/m^2$

Paint Maintenance

Curing Timeline: Light foot traffic: After 72 hours; Normal use (furniture/equipment): After 7 days

During Curing: Apply stain/water protection; Maintain ventilation; Extend curing period in high humidity or temperatures $< 15^{\circ}C$

Package

Option A 2 Bags in 1 Bucket		20KG · A:17.5kg + B:2.5 kg =20kg/set · 1 sets per bucket 36 sets per pallet 24KG · A:21kg + B:3 kg =24kg/set · 1 sets per bucket 36 sets per pallet
Option B Direct Fill in 2 Buckets		15KG · A:13.13 kg/bucket + B:1.87 kg/bucket = 15 kg/set · 36 buckets of Part A per pallet · 175 buckets of Part B per pallet 24KG · A: 21 kg/bucket + B:3 kg/bucket = 24 kg/set · 36 buckets of Part A per pallet · 125 buckets of Part B per pallet

Customization

Custom unit weights, packaging formats, and private-label/OEM options are available upon request to match your market requirements and shipping efficiency.



SOLVENT-FREE EPOXY COLORED SAND SELF-LEVELING FLOOR COATING

Product Description

DP08 Solvent-Free Epoxy Colored Sand Self-Leveling Floor Coating is a high-performance resin flooring system formulated with epoxy resin and specialized curing agents. Its exceptional self-leveling properties combined with lightweight colored quartz aggregates create vibrant decorative patterns and rich textures for superior visual impact. This solvent-free coating yields a non-toxic, odorless film with excellent application ease, while delivering strong adhesion, ≥4H hardness, abrasion resistance, moisture resistance, chemical corrosion resistance, and a smooth, high-gloss finish.

Scope of Application

High-traffic indoor environments including living spaces, offices, industrial plants, warehouses, shopping malls, hotels, schools, hospitals, and underground parking facilities, among others.


Performance Characteristics

- Eco-Friendly Formula: Zero VOCs; Non-toxic; Pollution-free
- Exceptional Adhesion: High bond strength to substrates; Minimal curing shrinkage prevents cracking
- Premium Aesthetics: Smooth finish with vibrant quartz patterns; Rich texture depth
- Robust Durability: ≥4H hardness; Abrasion, pressure & impact resistant; High-load capacity
- Superior Self-Leveling: Dustproof; High-strength seamless integration; Rapid uniform application

Technical Data

Surface drying time	≤ 8h
Drying time	≤ 48h
Initial fluidity /mm	≥ 140
Abrasion resistance (750g/500r) /g	≤ 0.03
Compressive strength (MPa)	≥ 45
Tensile bond strength	Standard condition ≥ 2.0
Impact resistance	1000g steel ball, height 100cm, coating film without cracks, no flaking
Anti-slip (dry friction coefficient)	≥ 0.5
Water resistance (168h)	No bubbling, no peeling, slight discoloration is allowed, and it will recover after 2h
Acid resistance (10%H ₂ SO ₄ , 48 h)	No abnormalities
Oil resistance (120# solvent oil, 2h)	No abnormalities
Alkali resistance (20%NaOH, 72h)	No abnormalities

Composition of Coating System

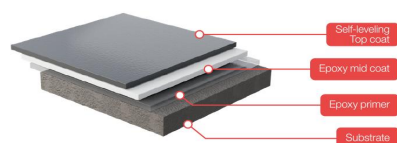

Substrate Requirements

- Strength: Surface must be smooth, solid, and free of hollow spots, loose particles, or cracks. Cementitious substrates: Minimum compressive strength ≥C20 (20 MPa)
- Flatness: ≤2mm under a 2m straightedge;
- Clean and dry: no oil, dust, water content <9%;
- New concrete treatment: use grinding machine to ensure solid, dry and clean;
- Old tile floor renovation: tile surface needs to be polished and brushed to improve adhesion.

Transportation and Storage

Storage Conditions: Must be stored between 5°C to 35°C (41°F to 95°F) at <85% relative humidity. Protect from direct sunlight, rain, and moisture.
Shelf Life: 12 months in original, unopened containers when stored under recommended conditions.

Construction

Epoxy Primer: Apply 1 coat of high-penetration epoxy primer via roller.

DP08 Self-Leveling Colored Sand Topcoat: Trowel 1 coat of self-leveling epoxy evenly, use a defoaming roller to roll back and forth for defoaming treatment.
Curing Protocol: Foot Traffic: Allow ≥24 hrs (at 25°C); Heavy Loads: Allow ≥72 hrs; Low Temp. Warning: Extend time if <15°C.

Construction Notes

Environmental Control: Avoid application during high humidity, rain, or low ventilation conditions.
Material Handling: Thoroughly mix Parts A & B of DP08 epoxy topcoat before use; Apply within 30 minutes after mixing; Complete entire work surface in one continuous session to ensure color consistency

Construction Dosage

epoxy primer: 0.125kg/m²
DP08 epoxy topcoat: 1.8kg/m²

Paint Maintenance

Curing Timeline: Light foot traffic: After 72 hours; Normal use (furniture/equipment): After 7 days
During Curing: Apply stain/water protection; Maintain ventilation; Extend curing period in high humidity or temperatures <15°C

Package		
Option A 2 Bags in 1 Bucket		20KG · A:18.57kg + B:1.43kg =20kg/set · 1 sets per bucket 36 sets per pallet
		24KG · A:22.29kg + B:1.71 kg =24kg/set · 1 sets per bucket 36 sets per pallet
Option B Direct Fill in 2 Buckets		16KG · A:14.86 kg/bucket + B:1.14 kg/bucket = 16 kg/set ·36 buckets of Part A per pallet ·175 buckets of Part B per pallet
		24KG ·A: 22.29kg/bucket + B:1.71kg/bucket = 24 kg/set ·36 buckets of Part A per pallet ·125 buckets of Part B per pallet

Customization

Custom unit weights, packaging formats, and private-label/OEM options are available upon request to match your market requirements and shipping efficiency.

