




Premium Coating
Reliable Partner

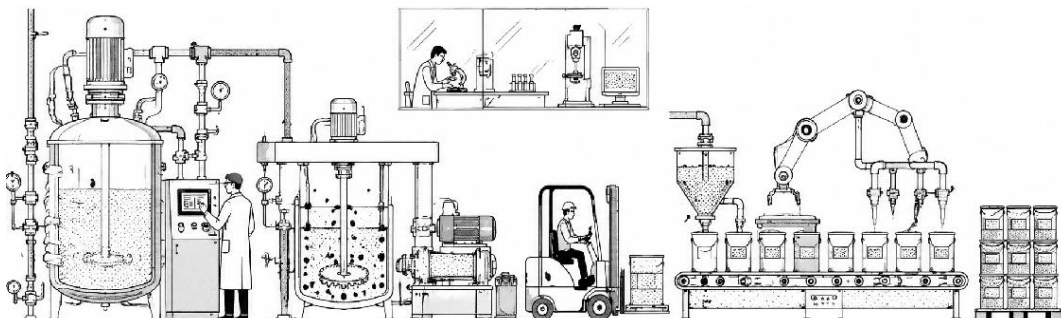

<https://www.urbvo.com/>

Thin-coat Epoxy Floor Coating

Product Description

DP04 The water-based epoxy flat coating system uses water as a dispersing medium. It consists of a two-component system formed by high-performance water-based epoxy resin and a curing agent, combined with premium additives and wear-resistant aggregates to create an eco-friendly, high-strength flooring coating. The product is odorless and features excellent adhesion, wear resistance, compressive strength, and chemical resistance, and complies with green building standards.

Scope of Application

Facilities such as industrial plants, underground parking garages, and warehousing and logistics centers that require high floor strength

Performance Characteristics

Breathable: Offers a degree of breath ability, helping to reduce moisture buildup beneath the coating.

Eco-Friendly & Low-Odor: Our eco-friendly water-based formula ensures a low-odor application that is safe for both you and the environment.


Strong Adhesion: Features supreme adhesion for a permanent bond that will not peel or lift.

Scratch & Wear Resistant: The wear and scratch-resistant finish easily withstands heavy traffic and daily abuse.

Technical Data

Non-volatile Content	73.1
Paint Film Appearance	Normal
Drying Time (Surface Dry)	2
Drying Time (Full Cure)	6
Pencil Hardness (Scratch)	2H
Abrasion Resistance (750 g/500 rpm)	0.04
Adhesion (Peel Test) – Standard Conditions	5(4.7~5.2), 100
Adhesion (Peel Test) – After Water Immersion	4(3.3~3.7)100%A/B
Water Resistance (240 h)	No abnormalities
Oil Resistance (120# Gasoline, 120 h)	No abnormalities
Acid Resistance (50 g/L H ₂ SO ₄ Solution, 48 h)	No abnormalities
Alkali Resistance (50 g/L NaOH Solution, 120 h)	No abnormalities
2,4,6-Tris(tert-butyl)phenol (2,4,6-TTBP)	Not detected

Composition of Coating System

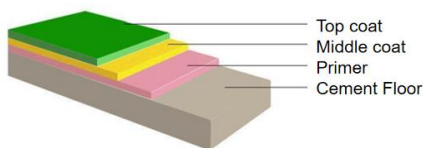

Substrate Requirements

- Strength: Surface must be smooth, solid, and free of hollow spots, loose particles, or cracks.
- Cementitious substrates: Minimum compressive strength $\geq$ C20 (20 MPa)
- Flatness: $\leq$ 2mm under a 2m straightedge;
- Clean and dry: no oil, dust, water content $<$ 9%;
- New concrete treatment: use grinding machine to ensure solid, dry and clean;
- Old tile floor renovation: tile surface needs to be polished and brushed to improve adhesion.

Transportation and Storage

Storage Conditions: Must be stored between 5°C to 35°C (41°F to 95°F) at $<$ 85% relative humidity. Protect from direct sunlight, rain, and moisture.

Shelf Life: 12 months in original, unopened containers when stored under recommended conditions.

Construction

Construction environment: temperature at 5°C-40°C, relative humidity not higher than 80%, windy and rainy conditions should stop construction or under effective shelter before construction.

3-Step System: Apply via roller or brush. Ensure uniform coverage without missed spots. Prier: 1 coat; Middle coat: 1 coat; Top coat: 2 coats.

Construction Notes

Always mix thoroughly before use to prevent settling.

Construction Dosage

Primer: 0.125kg/m²
Middle coat: 0.4kg/m²
Top coat: 0.25kg/m²

Paint Maintenance

Curing Timeline: Light foot traffic: After 72 hours; Normal use (furniture/equipment): After 7 days

During Curing: Apply stain/water protection; Maintain ventilation; Extend curing period in high humidity or temperatures $<$ 15°C

Package		
Direct Fill in 2 Buckets		10KG ·A:9.09kg/bucket + B:0.91 kg/bucket = 10 kg/set ·36 buckets of Part A per pallet ·175 buckets of Part B per pallet
		20KG ·A: 18.18 kg/bucket + B:1.82 kg/bucket = 20 kg/set ·36 buckets of Part A per pallet ·125 buckets of Part B per pallet
Customization Custom unit weights, packaging formats, and private-labelOEM options are available upon request to match your market requirements and shipping efficiency.		

