




Premium Coating
Reliable Partner

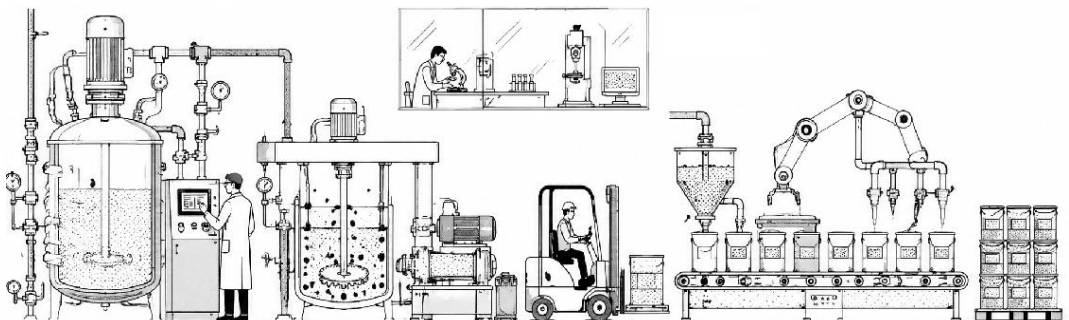

<https://www.urbvo.com/>

WATERPROOF PAINT

Product Description

FS01 Waterproof Paint is a single-component, water-based emulsion coating formulated with pure acrylic polymer and advanced additives. Cures to form a flexible waterproofing membrane with exceptional elasticity, crack-bridging capability, and weather resistance. Provides reliable impermeability against water ingress while protecting substrates from degradation.

Performance Characteristics

- Zero Permeability: High-polymer formulation creates an impermeable barrier with exceptional crack resistance.
- Extreme Weather Resistance: Withstands UV, freeze-thaw cycles, and temperature extremes (-30°C to +80°C).
- Chemical Resilience: Resists acid/alkali erosion (pH 3-12), ideal for coastal areas and industrial zones.
- Elastic Crack Bridging: ≥300% elongation accommodates movement in joints and expansion seams.


Scope of Application

Cement mortar roofing, gutter, daughter wall, minor roof cracks, wall corners, old membrane and more.

Technical Data

Tensile strength (MPa)	≥1.2
Fracture elongation (%)	≥300
Low temperature bending	-15°C, no crack
Impermeability	0.3MPa, 2h, impervious to water
Solid content (%)	≥65
Surface drying time	≤4h
Drying time	≤8h
Bonding strength (standard state)/MPa	≥1.0
Water absorption rate (%)	≤10

Composition of Coating System

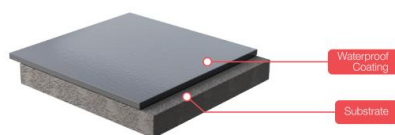

Substrate Requirements

- Strength: Solid, flat surface; free of voids, loose particles, and cracks; Concrete compressive strength ≥C20 (20 MPa);
- Flatness: ≤2mm under 2m straightedge;
- Clean and dry: no oil, dust, water content <9%;
- New concrete treatment: use grinding machine to ensure solid, dry and clean;

Transportation and Storage

Storage Conditions: Must be stored between 5°C to 35°C (41°F to 95°F) at <85% relative humidity. Protect from direct sunlight, rain, and moisture.
Shelf Life: 12 months in original, unopened containers when stored under recommended conditions.

Construction

- I. Substrate Preparation
 - Cleaning: Remove all loose/flaking old paint, rust scale, heavy corrosion buildup, oils, and dirt from the surface. Ensure the substrate remains dry.
 - Leveling: Repair uneven surfaces with cement mortar or hydraulic cement-based leak-stopper.
 - Sealing: Apply penetrating sealer/primer to friable/dusting substrates.
- II. Application
 - Apply first thin coat. Allow 4-hour drying until touch-dry. Apply second coat. (Following the principle of "thin and multiple layers", it improves the service life of the waterproof layer.)
 - Crack Repairing:
 - ≤2mm cracks: Apply first thin coat. Embed polyester fabric reinforcement while wet, and then apply a second coat to cover it.
 - >2mm cracks: Pre-fill with rapid-setting cementitious mortar. Proceed with standard coating system.

Construction Dosage

1kg/m²

Paint Maintenance

Curing Timeline: Light foot traffic: After 72 hours; Normal use (furniture/equipment): After 7 days
During Curing: Apply stain/water protection; Maintain ventilation; Extend curing period in high humidity or temperatures <15°C

Package		
Option A		20KG · 1 sets per bucket 36 sets per pallet
		25KG · 1 sets per bucket 36 sets per pallet
Customization Custom unit weights, packaging formats, and private-labelOEM options are available upon request to match your market requirements and shipping efficiency.		

