




Plastic Timing Pulleys MXL025

(0.080" / 2.032mm pitch)


Moulded Metric Insert

Pilot Bore


in Polycarbonate - Glass Filled with Aluminium / Brass Insert

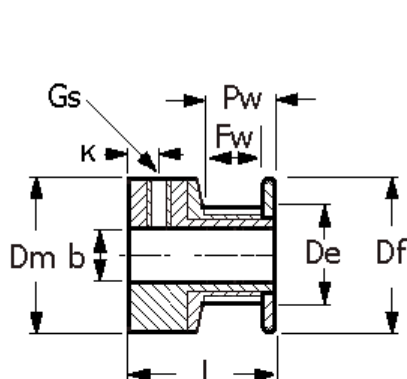

Type A with Aluminium Insert

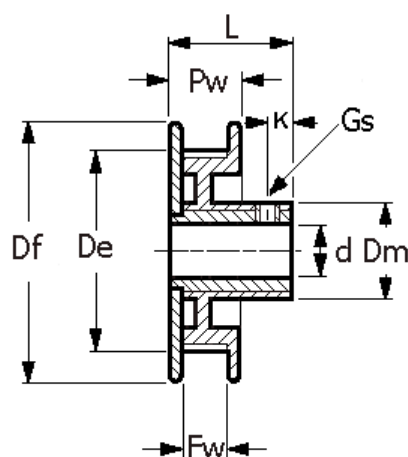

Type B with Aluminium Insert

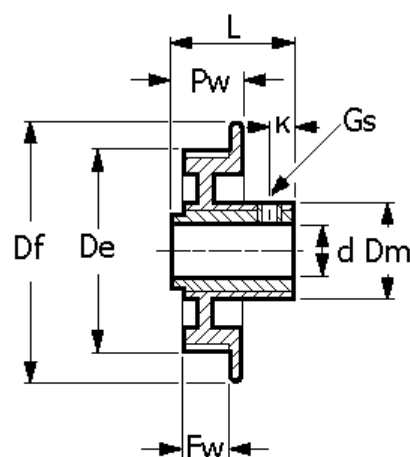

Type C with Brass Insert

Dimensions

All dimensions in mm.
Bore tolerance +0.025 / -0.00mm.
General tolerances ± 0.25 mm unless otherwise marked.
Temperature range -40°C to +80°C

| Stock Number | Type | No Teeth | Pitch Diam. mm | O.D De mm | Df mm | Dm mm | Fw mm | L mm | Bore d mm | Pw mm | Gs | K mm | Insert |
|--------------|------|----------|----------------|-----------|-------|-------|-------|------|-----------|-------|--------|------|--------|
| 7784714 | A | 18 | 11.63 | 11.13 | 16 | 13 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Alu. |
| 7784718 | A | 20 | 12.93 | 12.42 | 17 | 13 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Alu. |
| 7784727 | B | 22 | 14.22 | 13.72 | 19 | 13 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Alu. |
| 7784720 | B | 24 | 15.52 | 15.01 | 20 | 13 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Alu. |
| 7784724 | B | 30 | 19.40 | 18.89 | 24 | 13 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Alu. |
| 7784733 | B | 36 | 23.29 | 22.78 | 28 | 13 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Alu. |
| 7784736 | C | 40 | 25.88 | 25.37 | 30 | 17 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Brass |
| 7784730 | C | 44 | 28.45 | 27.94 | 33 | 17 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Brass |
| 7784749 | C | 48 | 31.04 | 30.53 | 35 | 17 | 8 | 17.5 | 5 | 11 | 1 x M3 | 3 | Brass |
| 7784742 | C | 60 | 38.81 | 38.30 | 43 | 17 | 8 | 17.5 | 6 | 11 | 1 x M3 | 3 | Brass |
| 7784746 | C | 72 | 46.56 | 46.05 | 51 | 17 | 8 | 17.5 | 6 | 11 | 1 x M3 | 3 | Brass |
| 7784755 | C | 80 | 51.74 | 51.23 | 56 | 17 | 8 | 17.5 | 6 | 11 | 1 x M3 | 3 | Brass |