

LA-RAK III TOURING RACK



LA-RAK III is a flyable touring rack offering up to 48 channels of amplification in a 9 U frame. Three LA7.16 amplified controllers, two LS10 AVB switches and power and signal distribution panels are internally prewired to offer a plug-and-play, reliable solution that allows for seamless networked audio redundancy based on the Milan protocol.

The rugged LA-RAK III features a shock-absorbing inner frame, protective and handling elements to ease transport and manipulation. With power connectors for any voltage standard, LA-RAK III can be used worldwide to facilitate tour logistics and cross-rental between L-Acoustics rental network agents.

SPECIFICATIONS

LA-RAK III

Content	3 x LA7.16 amplified controller 2 x LS10 AVB switch 1 x LA-PANEL III 1 x LA-POWER II 2 x doors, 2 x coupling bars, 1 x dolly board and cables
---------	---

Weight (net)	117.5 kg / 259 lb (with all the above)
--------------	--

Material	Polyethylene, aluminium and steel external structure, LEXAN® polycarbonate doors
----------	--

Rigging and handling	2 x coupling bars, dolly board
----------------------	--------------------------------

LA-PANEL III

Front

Analog or AES/EBU input/link	3 x female Neutrik® XLR3 (IN) / 3 x male Neutrik® XLR3 (LINK)
------------------------------	---

Rear

Analog or AES/EBU input/link	3 x female Neutrik® XLR3 (IN) / 3 x male Neutrik® XLR3 (LINK)
------------------------------	---

LA-POWER II

Front

AC input (US)	30 A - NEMA L21-30P (3P+N+E) male outlet
---------------	--

AC input/link out (EU)	32 A - IEC 60309 (3P+N+E) male outlet 32 A - IEC 60309 (3P+N+E) female outlet DANGER: Do not use with a 120 - 208 V power supply.
------------------------	---

AC presence	3 x dual LEDs: Left: US AC input / right: EU AC input
-------------	---

AC auxiliary output (US)	NEMA 5-15 female outlet (AUX US MODE)
--------------------------	---------------------------------------

AC auxiliary output (EU)	Type F «Schuko» female outlet (AUX EU MODE)
--------------------------	---



Protection	10 A type C circuit breaker (AUX L3)
------------	--------------------------------------

Rear

AC output for LA7.16	3 x power cords fitted with 32 A Neutrik powerCON® connectors (AMP 1 L1, AMP 2 L2, AMP 3 L3)
----------------------	--

AC input selector switch	Switch between EU MODE and US MODE Important: Do not switch mode when connected to power supply.
--------------------------	---

AC output for LS10	2 x IEC 60320-1 type C13 female outlets (AUX L3)
--------------------	--

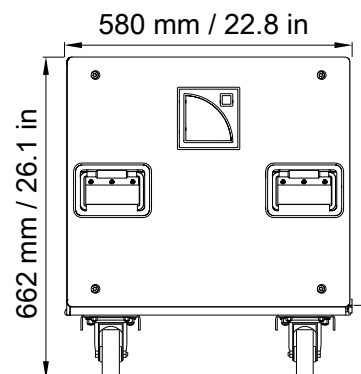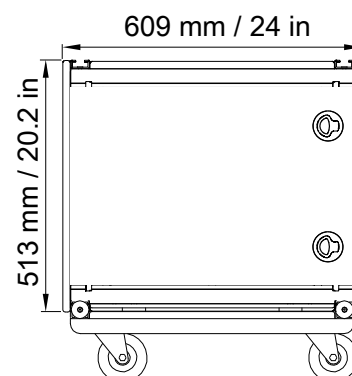

146 mm / 5.7 in