




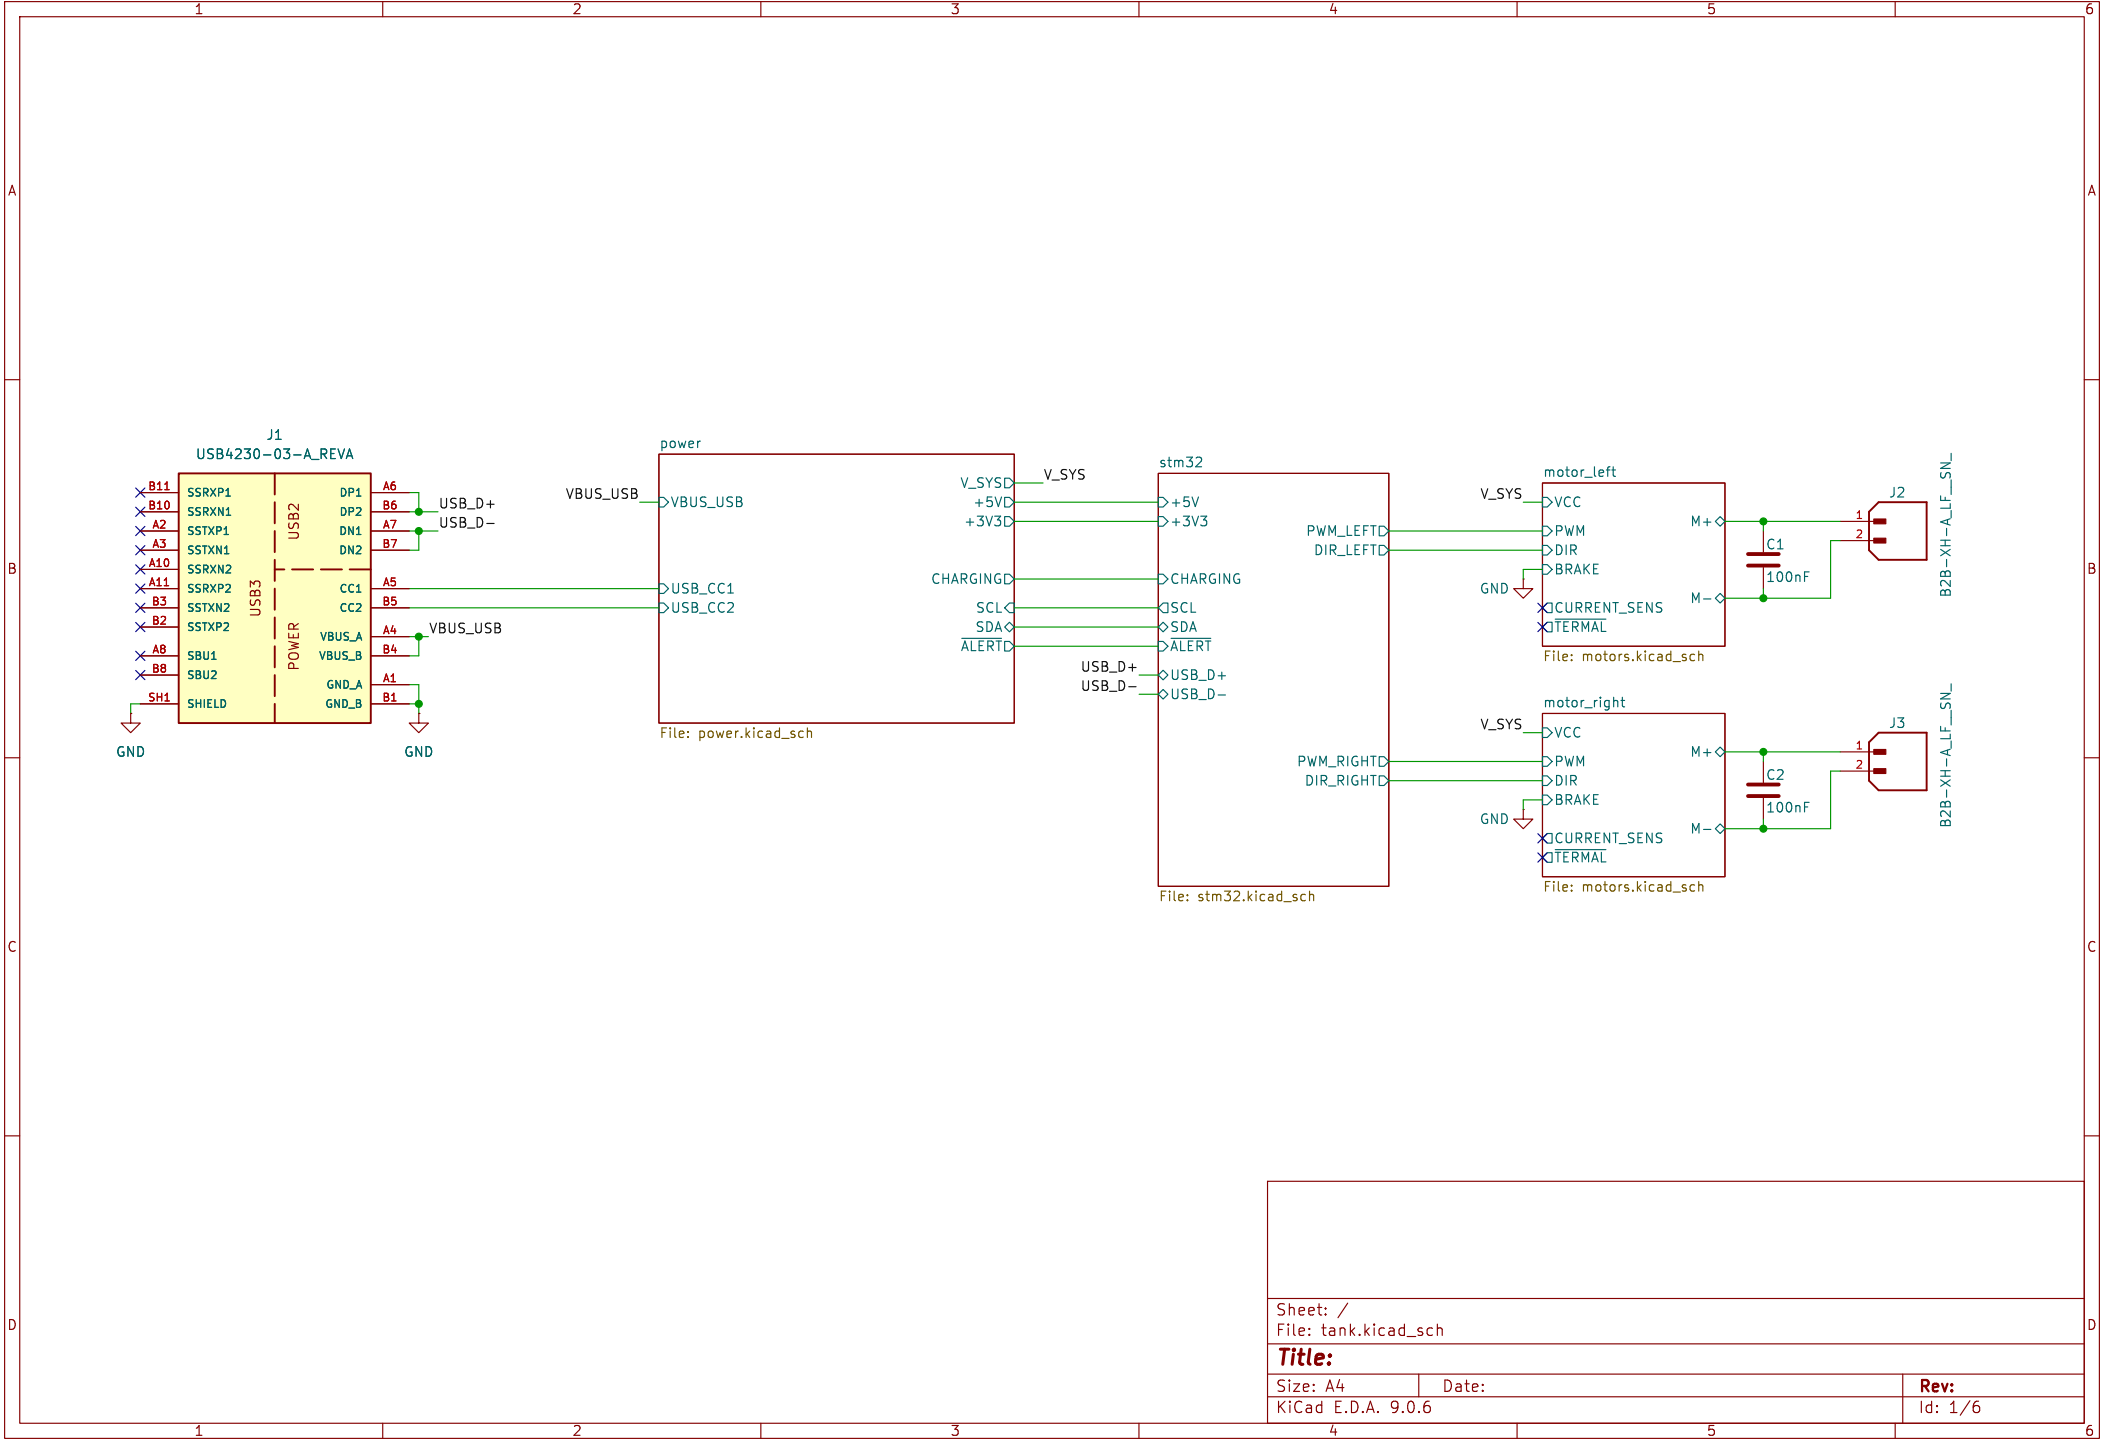


USB Type-C power management

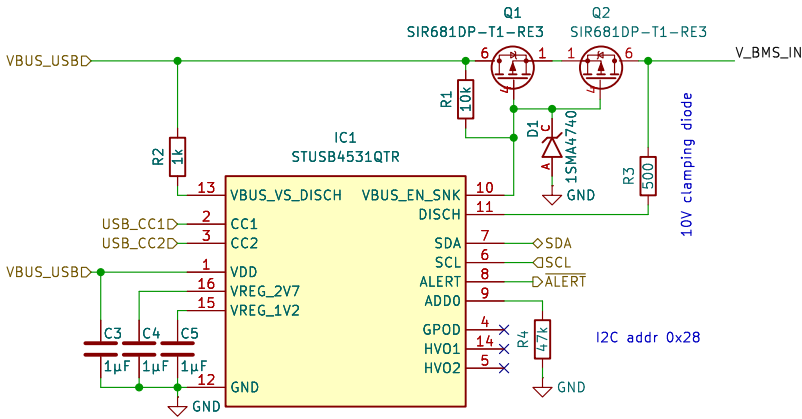


BMS

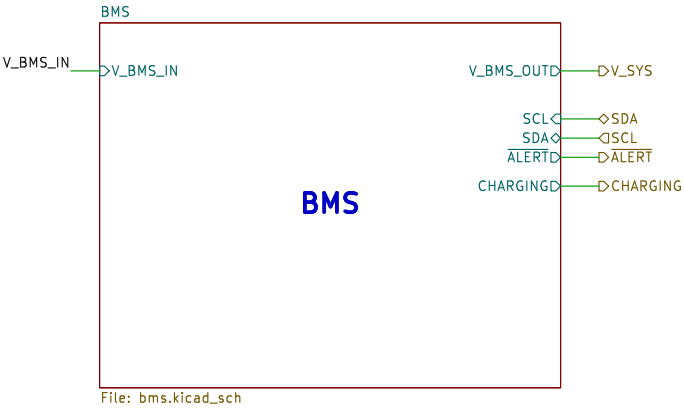


V_SYS to 3.3V BUCK converter

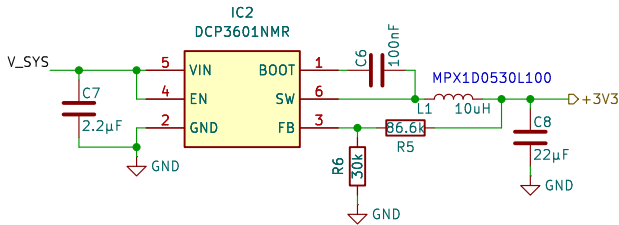



V_SYS to 5V BUCK converter

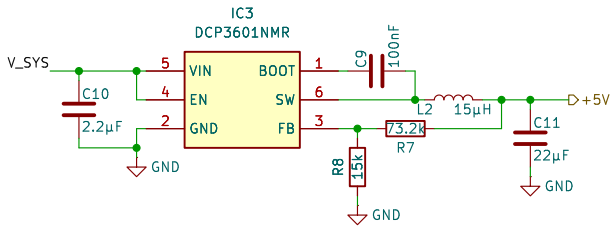

Battery power management

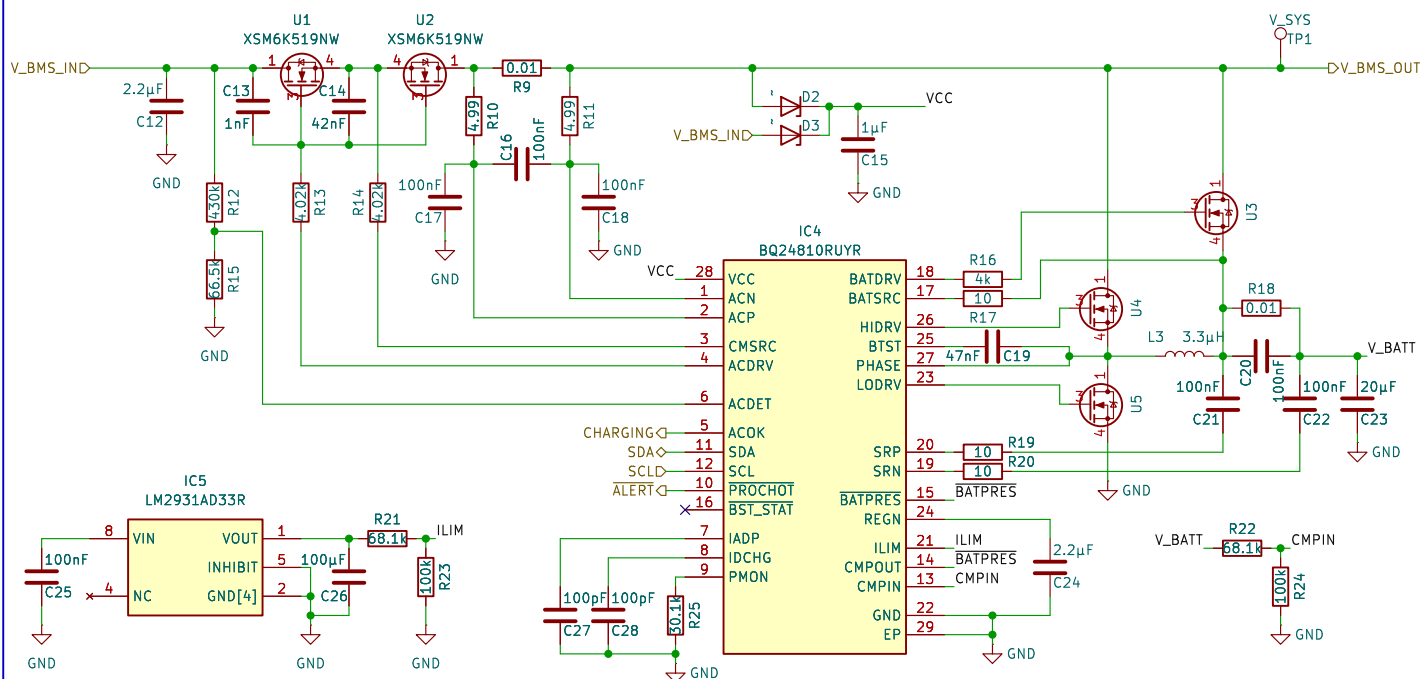

Battery monitoring

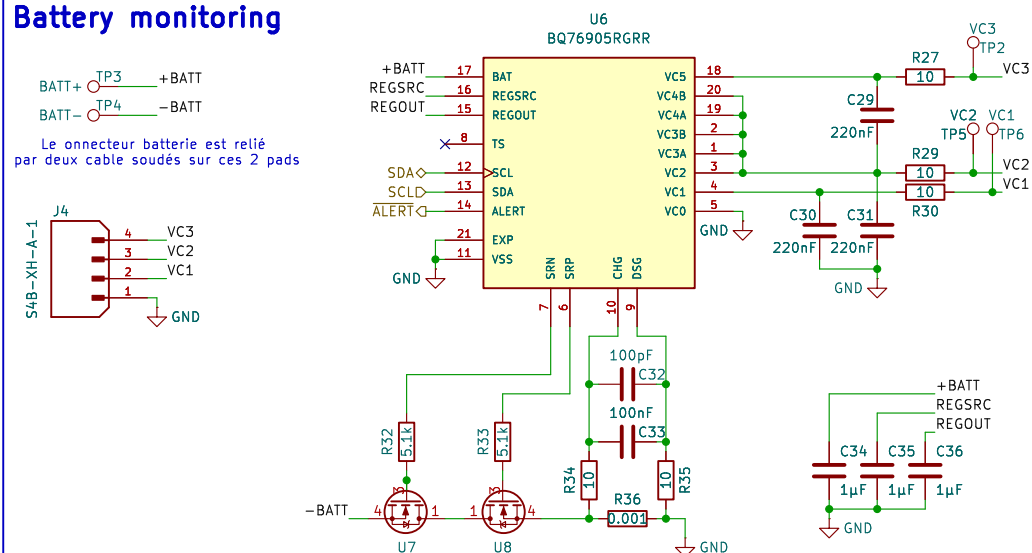

Le test avec une alim implique
ce jeu de résistance

Sheet: /power/BMS/
File: bms.kicad_sch

Title:


Size: A4	Date:
----------	-------

KiCad E.D.A. 9.0.6


Date:

Rev:	
------	--

Id: 3/6

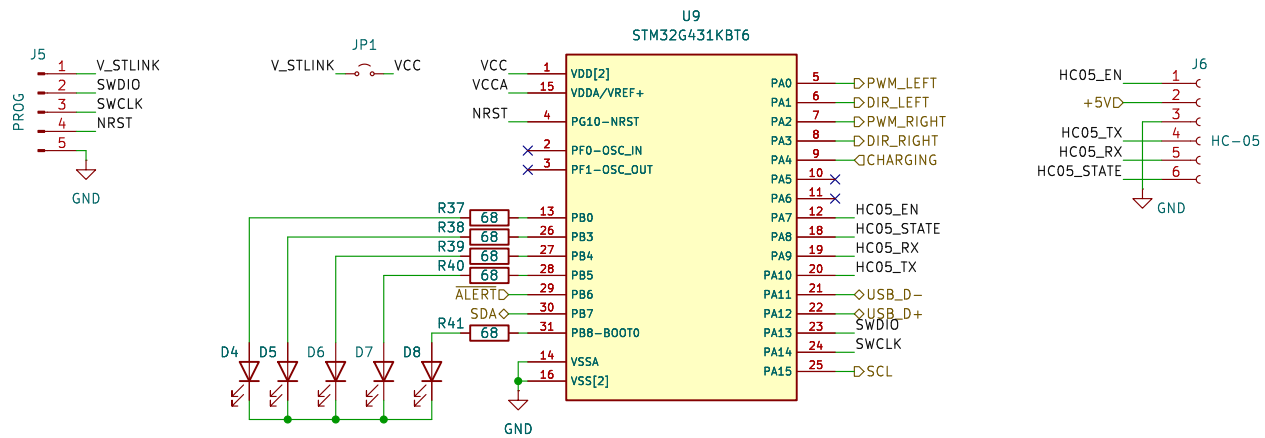

Decoupling

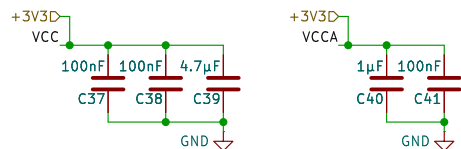

Sheet: /stm32/
File: stm32.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.6

Rev:

Id: 4/6

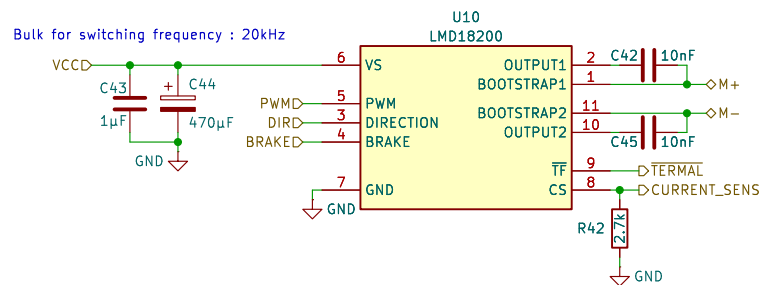

Add a pull-up for TERMAL FLAG signal
CS goes from 0V to 3.3V (0A to 3A)

Sheet: /motor_left/
File: motors.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 9.0.6

Rev:

Id: 5/6

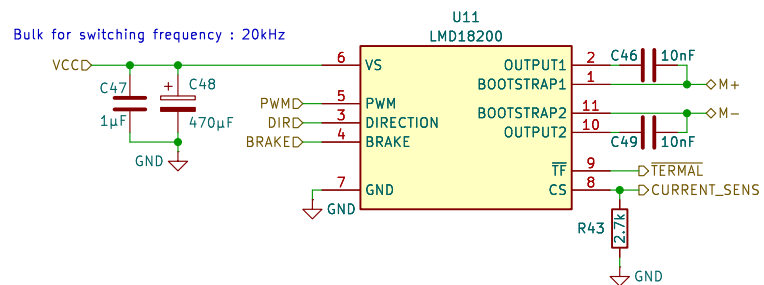

Add a pull-up for TERMAL FLAG signal
CS goes from 0V to 3.3V (0A to 3A)

Sheet: /motor_right/
File: motors.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.6

Id: 6/6