



Main Power Buck Converter

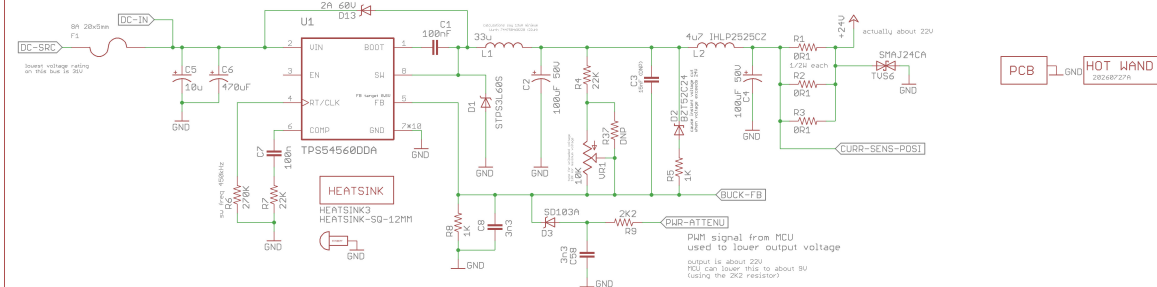

Main RF Power Amplifier


Class E

Matching Network

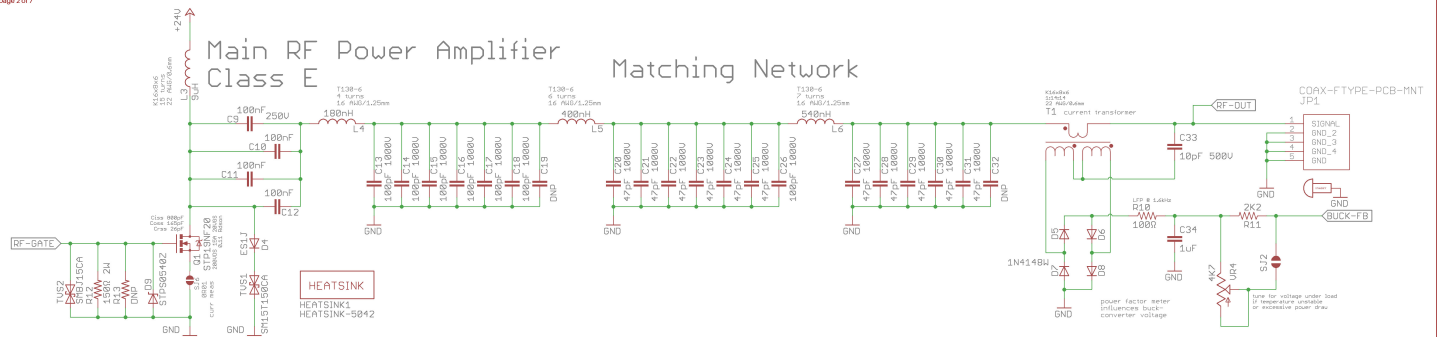


RF Amp Gate Driver


Tip Detection

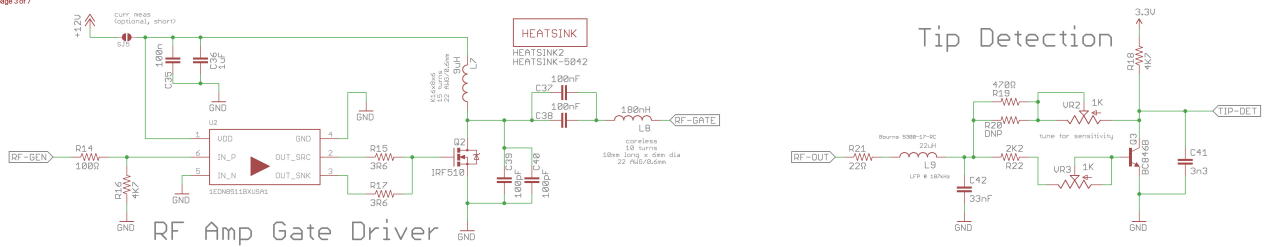


Microcontroller

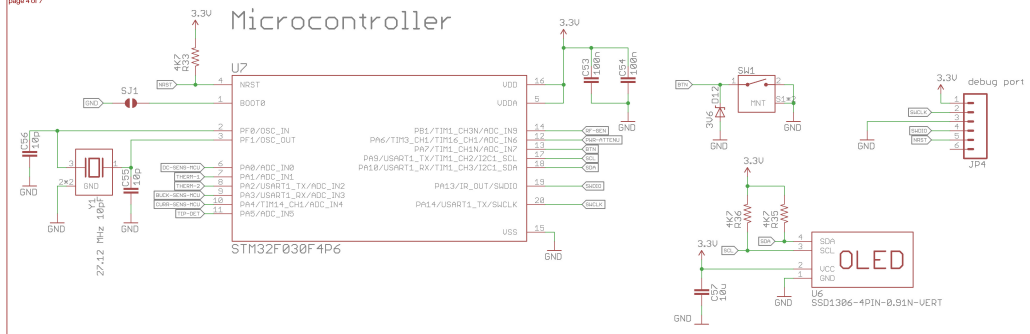

Secondary Power Buck Converters

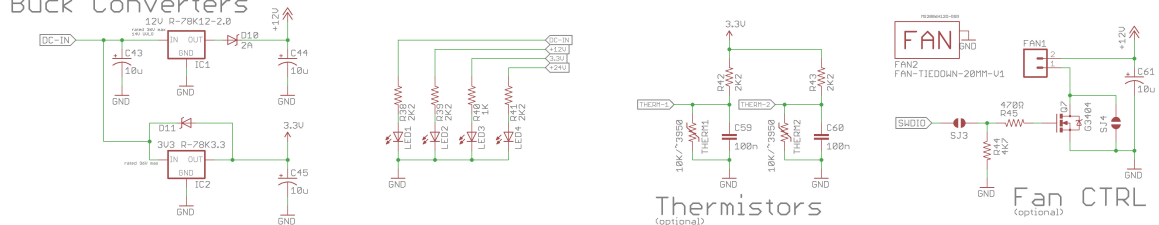

Power Sensing

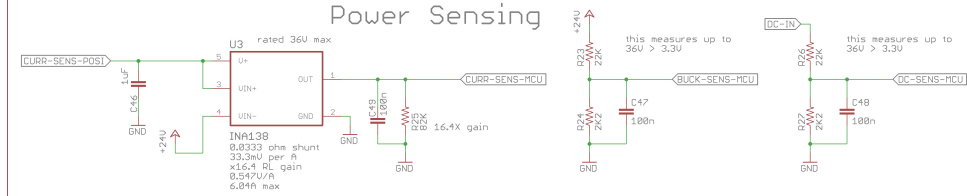

XT-30 DC Input

theoretically handles 75
practically should keep it 65
XT-CONNECTOR-XT30PW
JP3

