

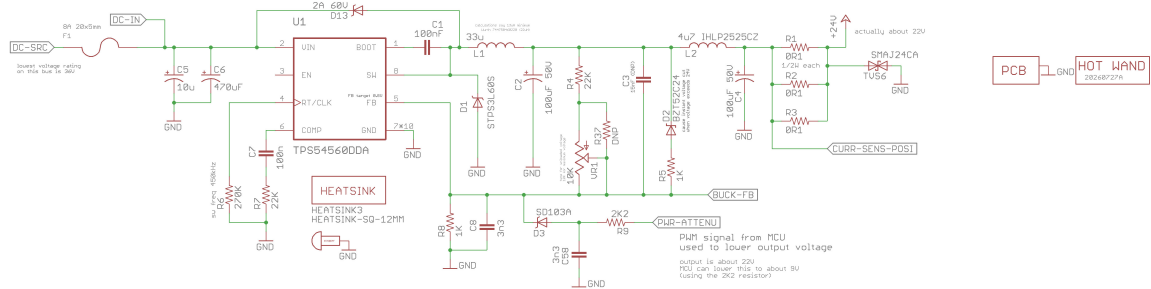


Main Power Buck Converter

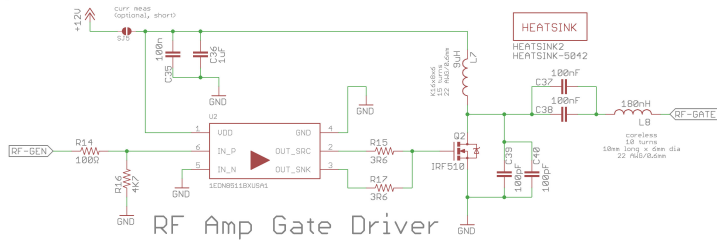


Main RF Power Amplifier


Matching Network

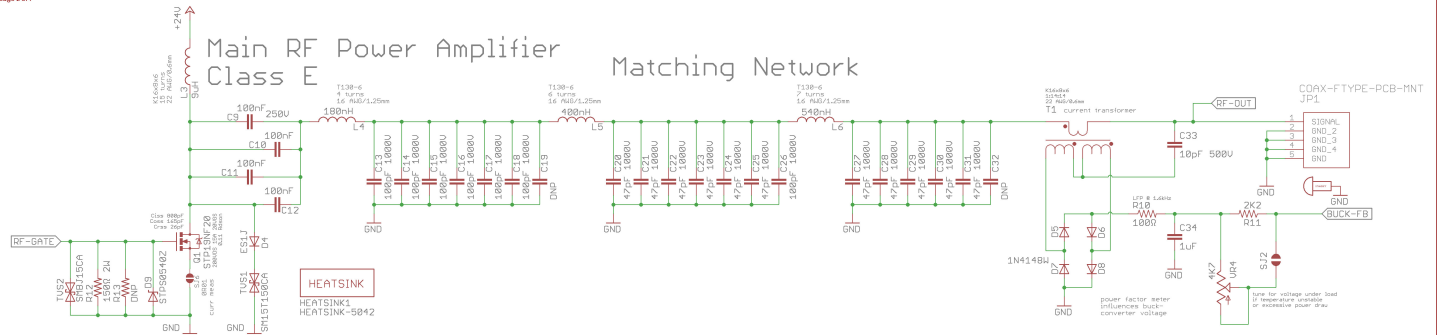


Tip Detection

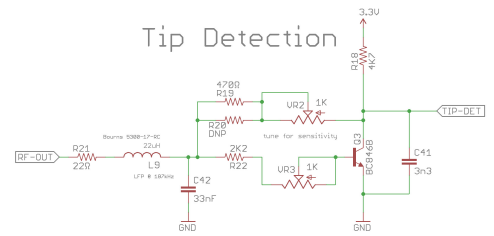

Microcontroller

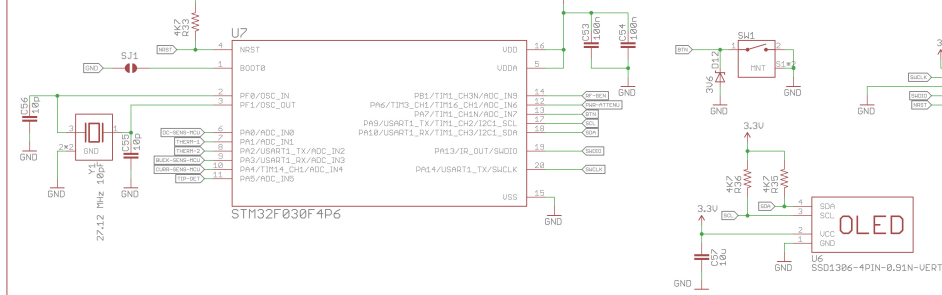


Secondary Power Buck Converters

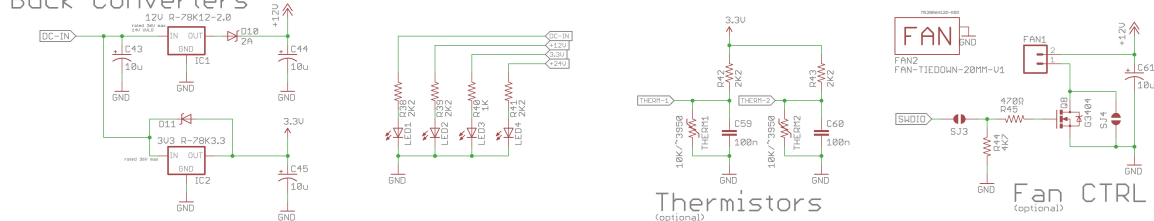

Thermistors

Fan CTRL

Power Sensing

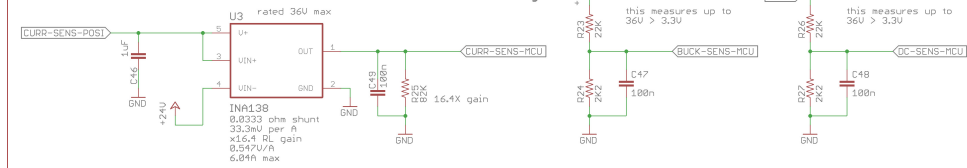

XT-30 DC Input

theoretically handles 8S
practically should keep it 6S
XT-CONNECTOR-XT30PW
JP3

