



RF Class-E Amp and Matching

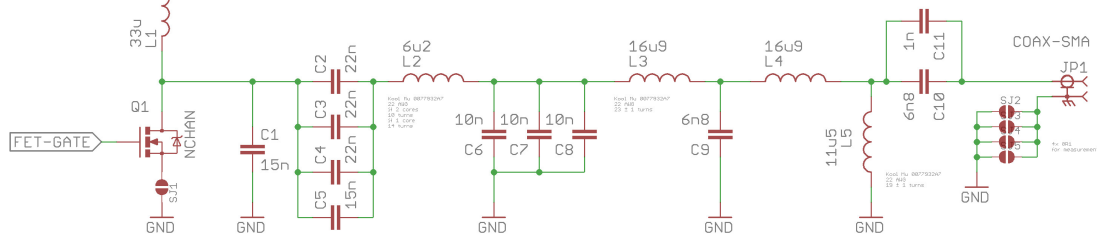


page 3 of 6

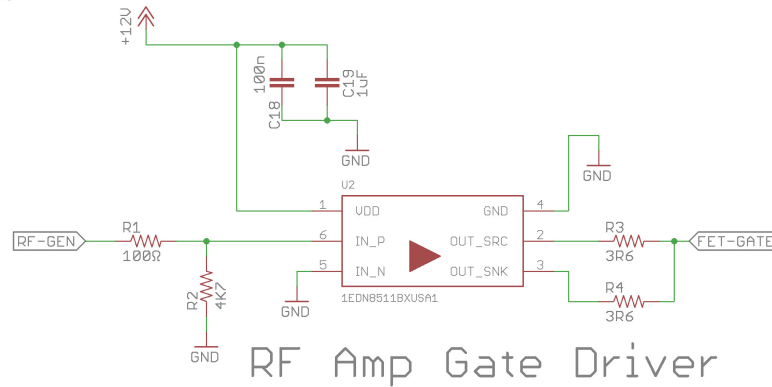


page 4 of 6

Microcontroller

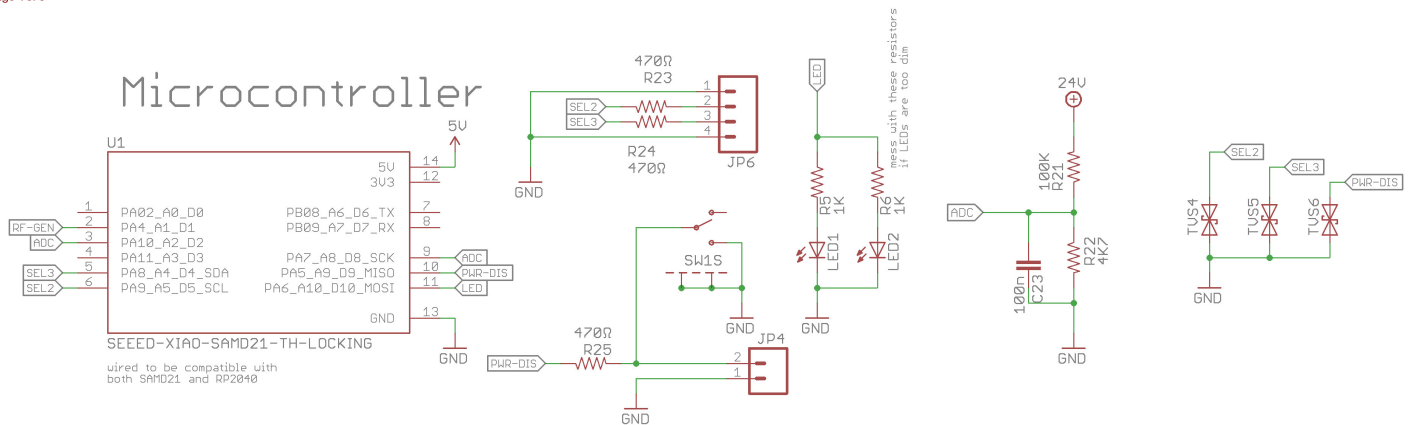

page 5 of 6

Secondary Power

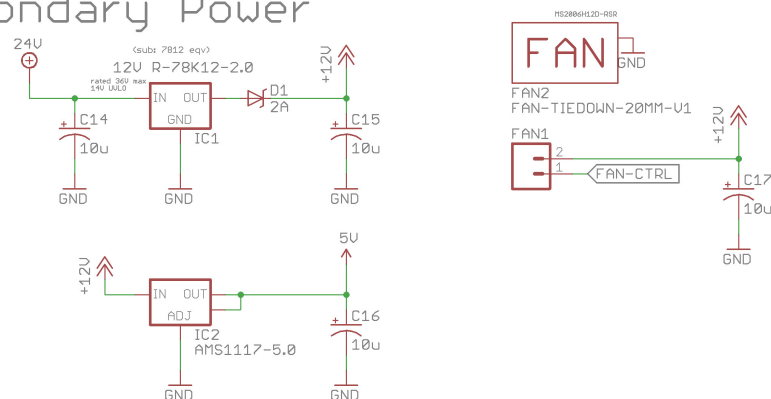

XT-30 DC Input

theoretically handles 8S
practically should keep it 6S
XT-CONNECTOR-XT30PW
ID2

