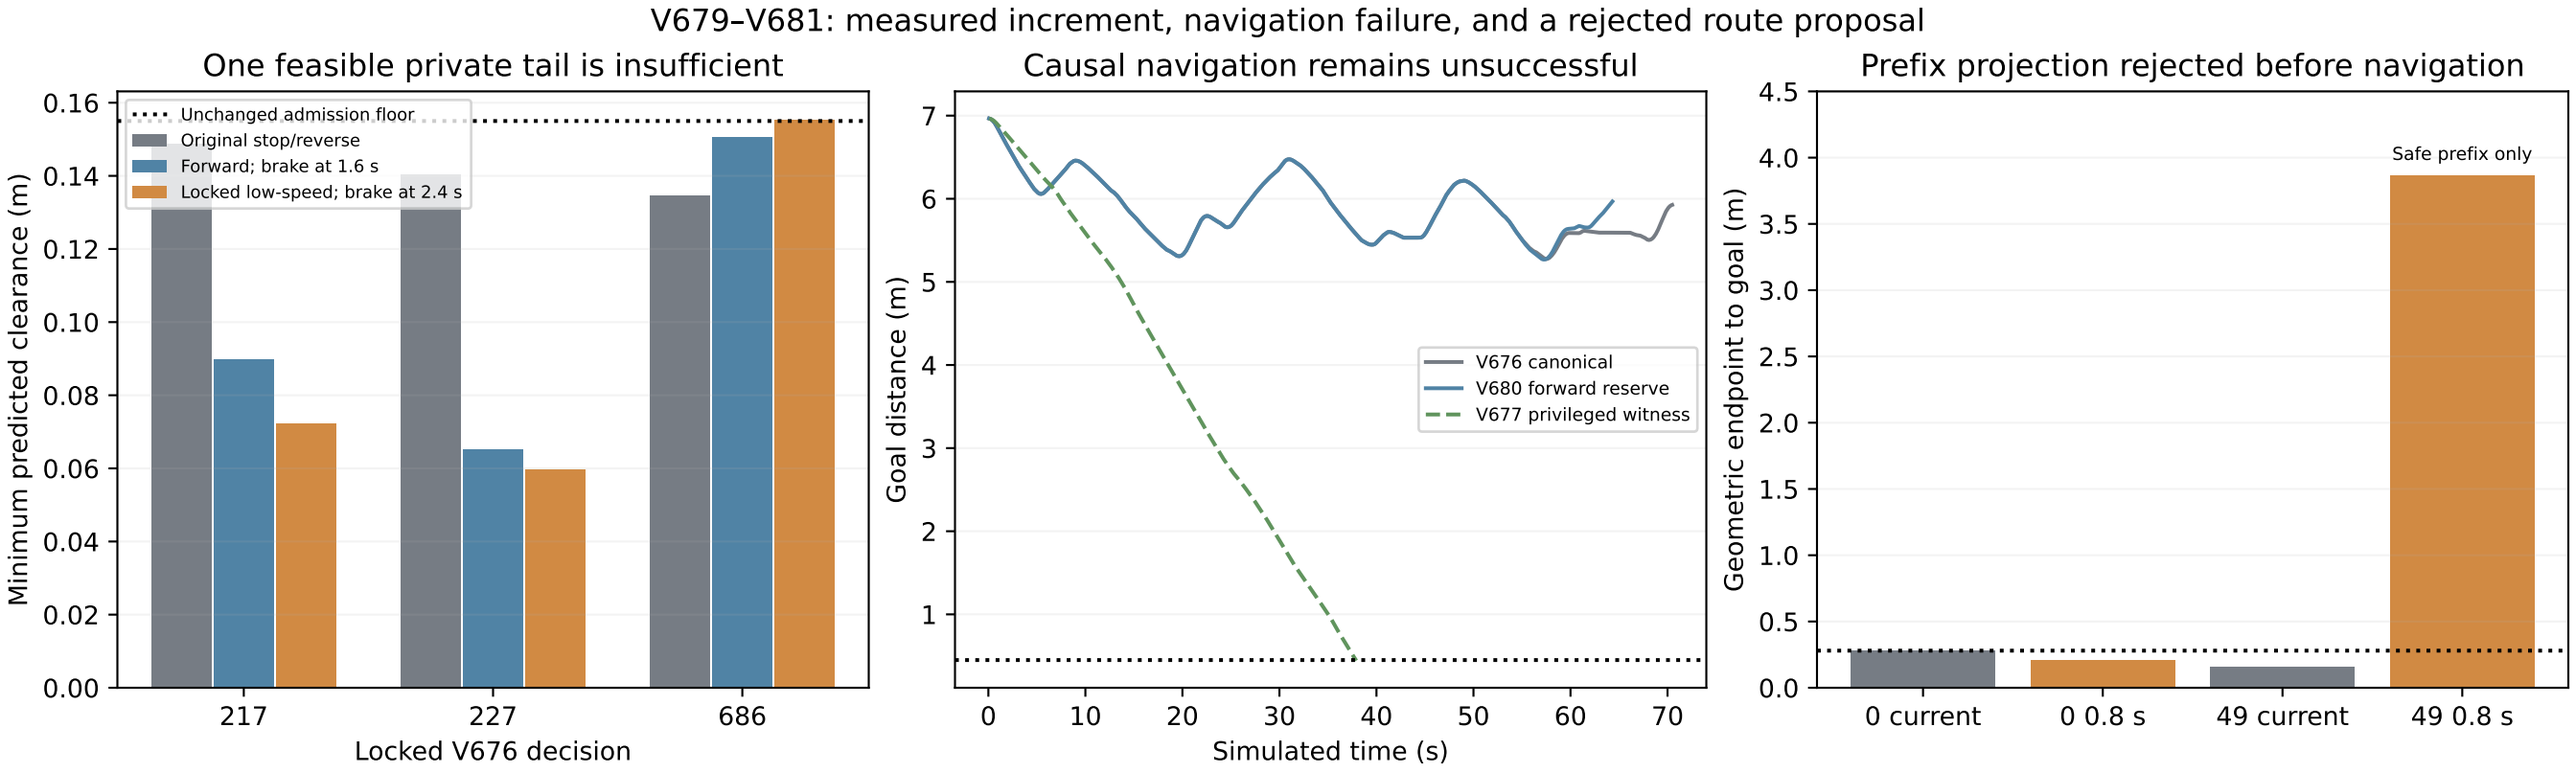
V679–V681: measured increment, navigation failure, and a rejected route proposal
One feasible private tail is insufficient
Minimum predicted clearance (m)
Unchanged admission floor
Original stop/reverse
Forward; brake at 1.6 s
Locked low-speed; brake at 2.4 s
0.00
0.02
0.04
0.06
0.08
0.10
0.12
0.14
0.16
217
227
686
Locked V676 decision
Causal navigation remains unsuccessful
Goal distance (m)
V676 canonical
V680 forward reserve
V677 privileged witness
1
2
3
4
5
6
7
0
10
20
30
40
50
60
70
Simulated time (s)
Prefix projection rejected before navigation
Geometric endpoint to goal (m)
Safe prefix only
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
4.5
0 current
0 0.8 s
49 current
49 0.8 s