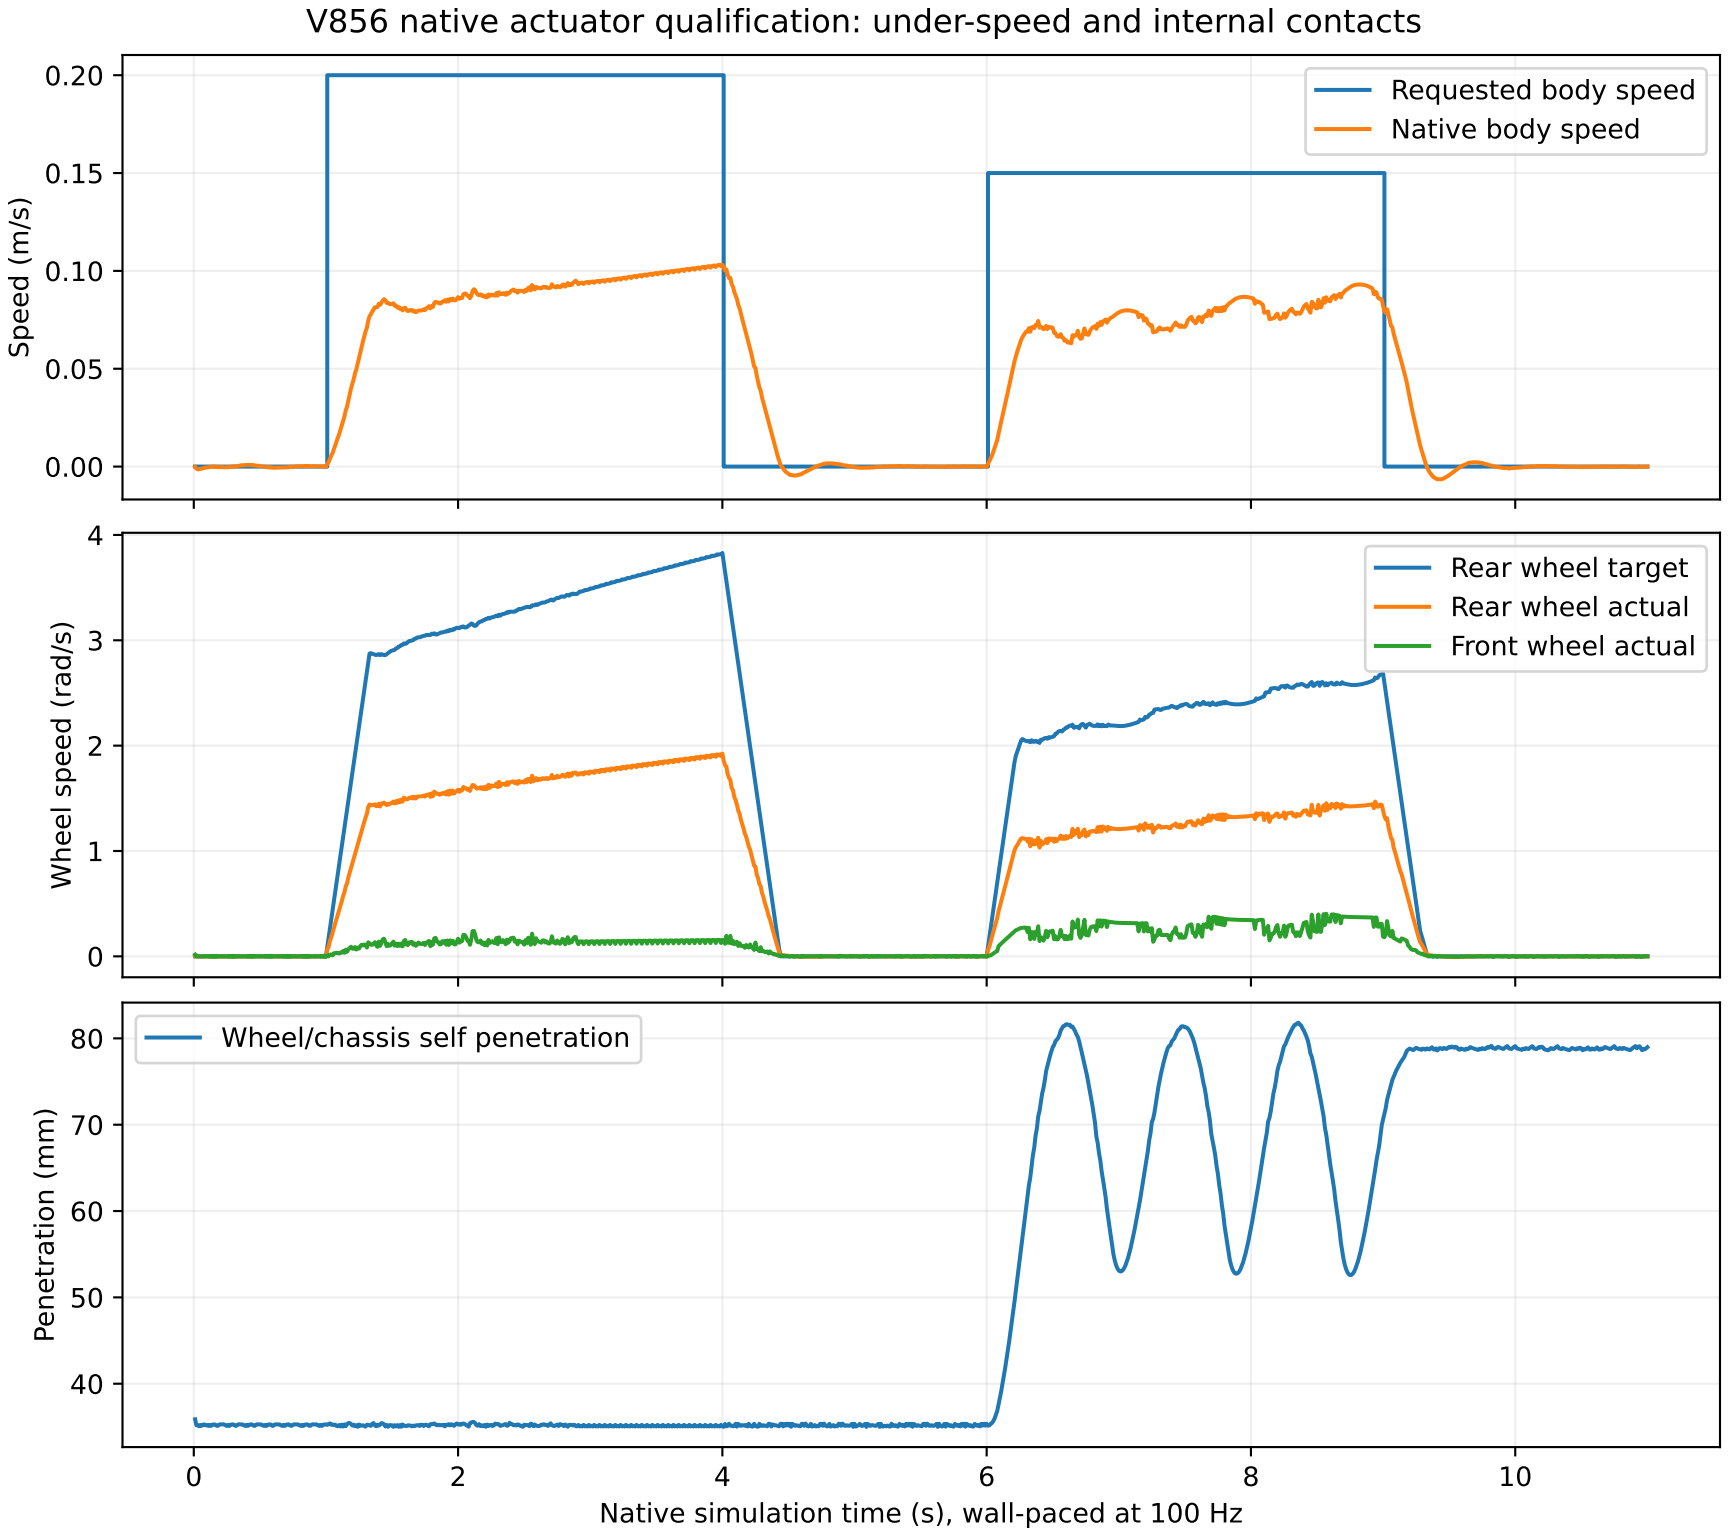
V856 native actuator qualification: under-speed and internal contacts
Speed (m/s)
0.20
0.15
0.10
0.05
0.00
Requested body speed
Native body speed
Wheel speed (rad/s)
4
3
2
1
0
Rear wheel target
Rear wheel actual
Front wheel actual
Penetration (mm)
80
70
60
50
40
Wheel/chassis self penetration
0
2
4
6
8
10
Native simulation time (s), wall-paced at 100 Hz