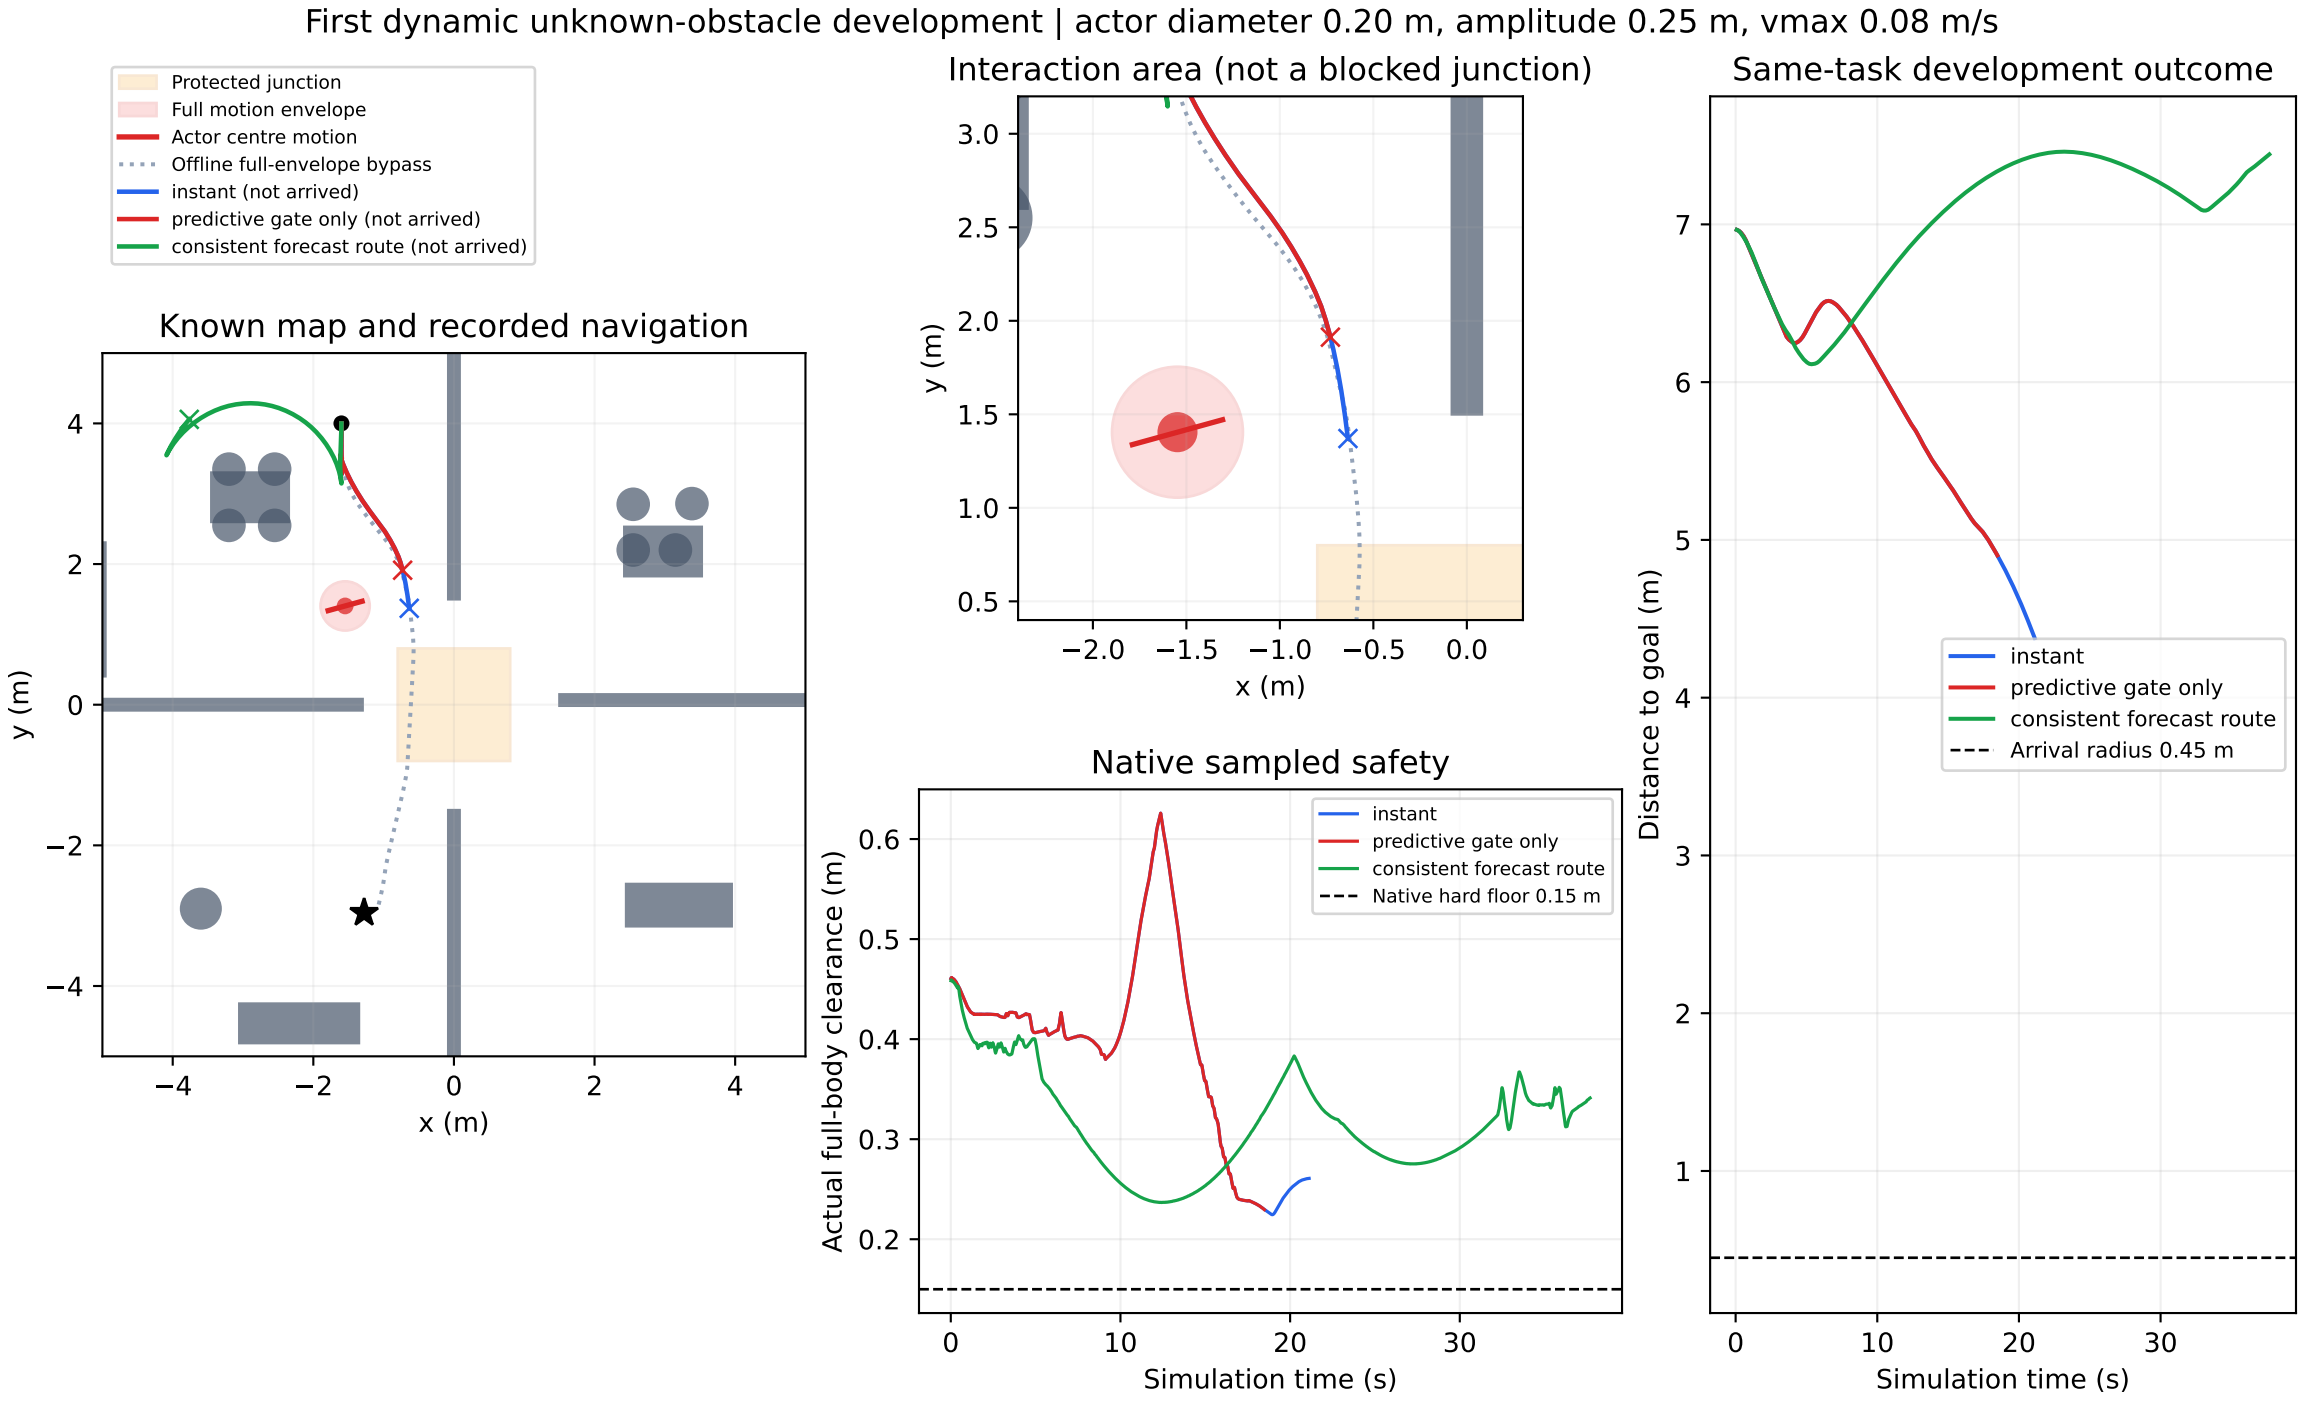
First dynamic unknown-obstacle development | actor diameter 0.20 m, amplitude 0.25 m, vmax 0.08 m/s
Protected junction
Full motion envelope
Actor centre motion
Offline full-envelope bypass
instant (not arrived)
predictive gate only (not arrived)
consistent forecast route (not arrived)
Known map and recorded navigation
x (m)
y (m)
Interaction area (not a blocked junction)
x (m)
y (m)
Native sampled safety
instant
predictive gate only
consistent forecast route
Native hard floor 0.15 m
Actual full-body clearance (m)
Simulation time (s)
Same-task development outcome
instant
predictive gate only
consistent forecast route
Arrival radius 0.45 m
Distance to goal (m)
Simulation time (s)