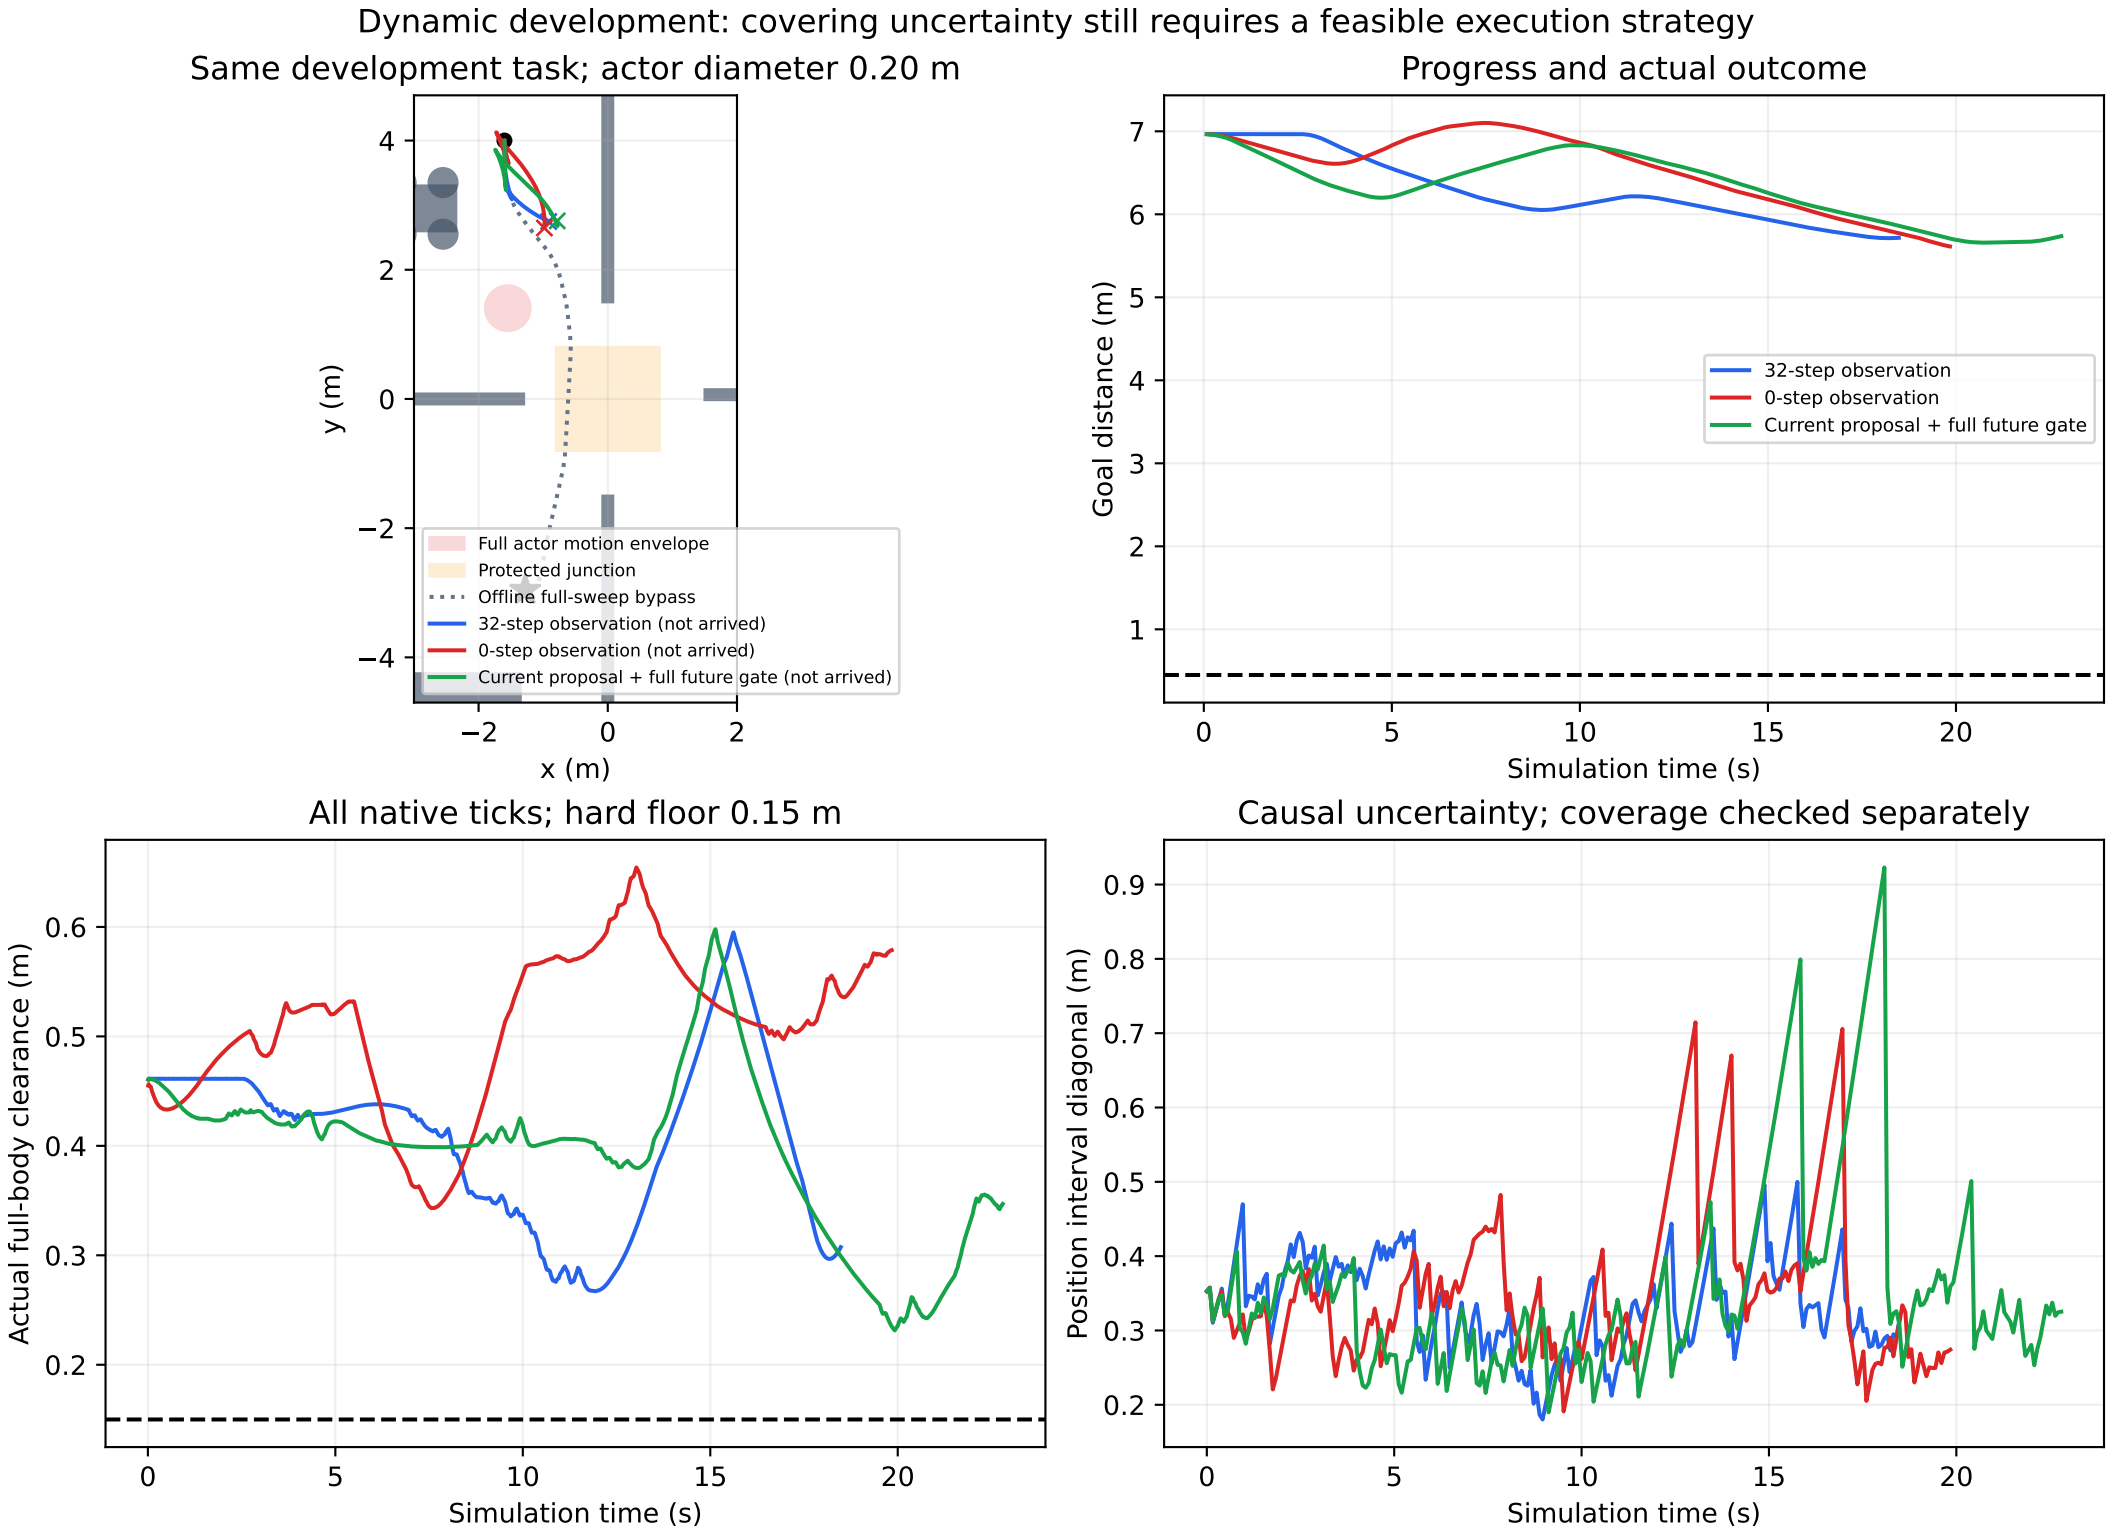
Dynamic development: covering uncertainty still requires a feasible execution strategy
Same development task; actor diameter 0.20 m
y (m)
x (m)
Full actor motion envelope
Protected junction
Offline full-sweep bypass
32-step observation (not arrived)
0-step observation (not arrived)
Current proposal + full future gate (not arrived)
Progress and actual outcome
Goal distance (m)
Simulation time (s)
32-step observation
0-step observation
Current proposal + full future gate
All native ticks; hard floor 0.15 m
Actual full-body clearance (m)
Simulation time (s)
Causal uncertainty; coverage checked separately
Position interval diagonal (m)
Simulation time (s)