




The unmarked size shall be subject to CAD !

Rev.	Revision content description	Date
V0	FIRST	2024.05.11
V1	Change the FPC PI direction	2024.05.15

Front View


Side View

Bottom View

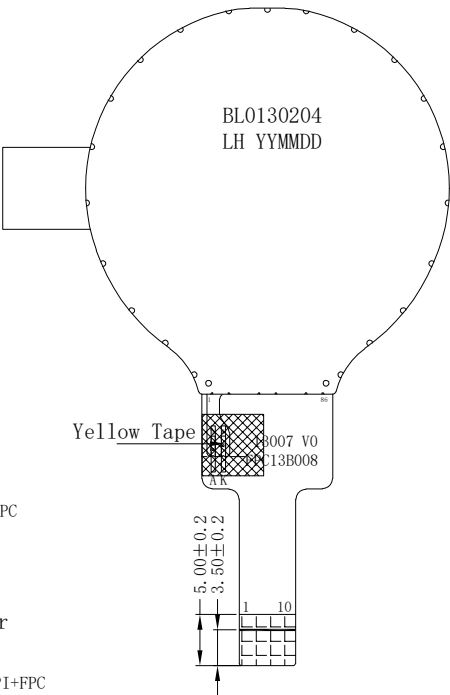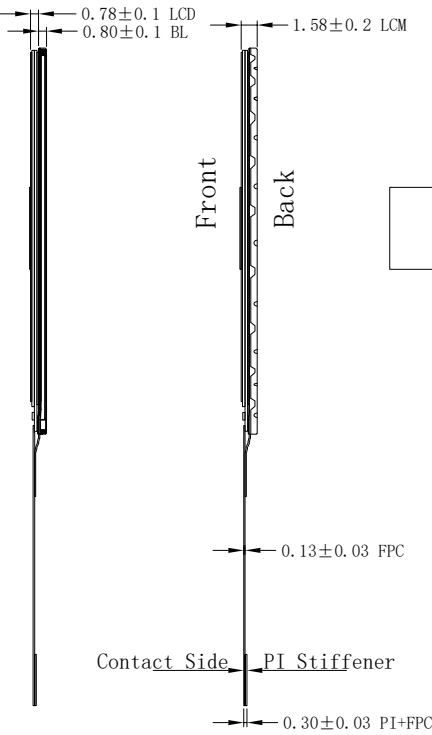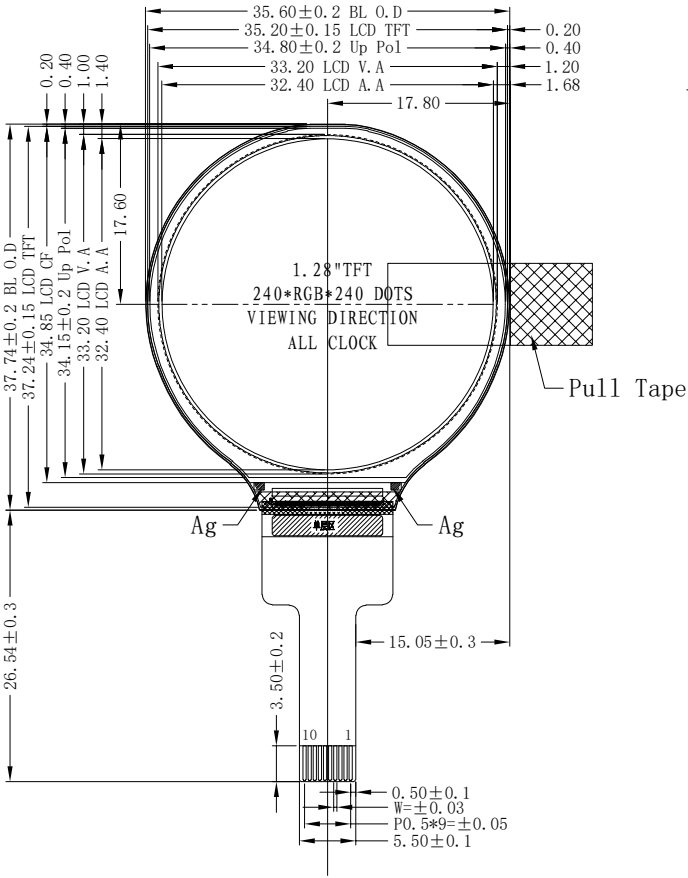

Pin	Logic
1	LEDA
2	VCI
3	CS
4	RESX
5	SCL
6	SDA
7	D/CX
8	SPI4W
9	LEDK
10	GND

- NOTE:
- DISPLAY TYPE:1.28", TFT-LCD, 262K COLORS
 - DISPLAY MODE:NORMALLY BLACK/IPS
 - VIEWING DIRECTION:ALL
 - LCM DRIVER IC:GC9A01 (COG)
LCM Interface:3/4Serial Interface
 - VCI:2.8-3.3V(TYP.)
 - OPERATING TEMP: -20° C TO 70° C
STORAGE TEMP: -30° C TO 80° C
 - BACK LIGHT:LED WHITE, 2 LED, 40mA, 2.8-3.2V
 - RoHS COMPLIANT.



SPI interface SET for SPI4W PINS.

SPI4W	SPI Module	DB Pin in use
0	SPI_3L	CS, SDA, SCL
1	SPI_4L	CS, SDA, SCL, D/CX

TOLERANCE(公差)			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.X±0.3	X.XX±0.2
Scale 1:1		Drawn	Unit
		Checked	mm
		Approve	Page 1/1