


The unmarked size shall be subject to CAD !


Note:The opening of top case must less than LCD POL 0.3mm at least,the LCD V.A is the Recommended opening of Lens.

Rev.	Revision content description	Date
V0	FIRST	2024.05.11


Front View

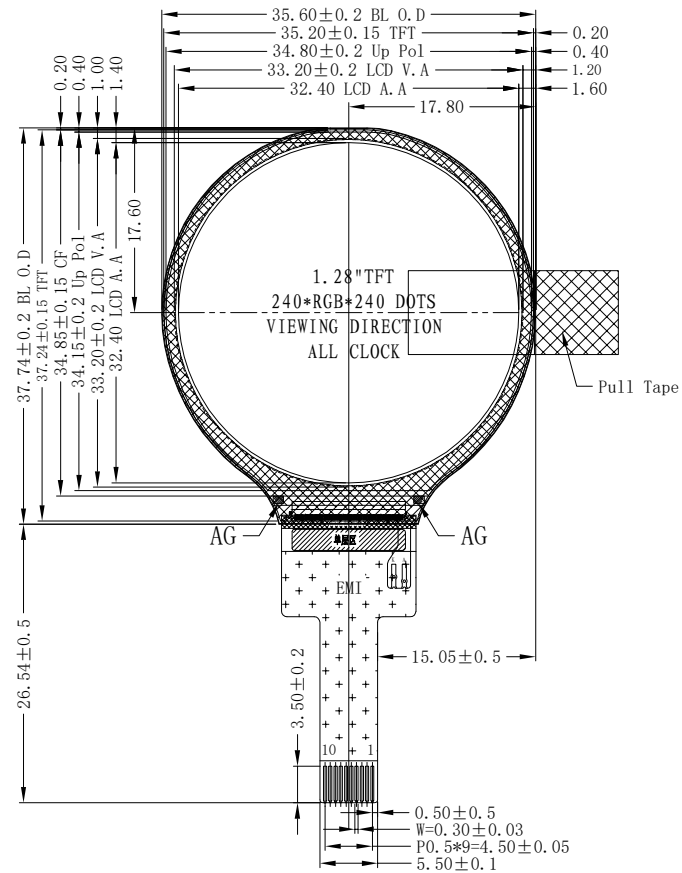

Side View

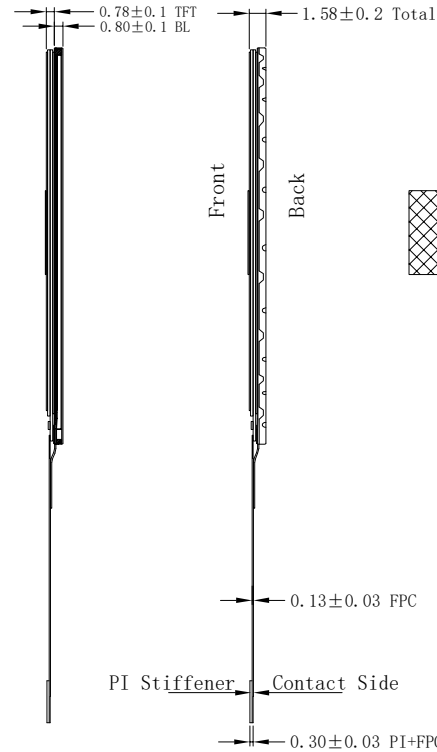


Bottom View

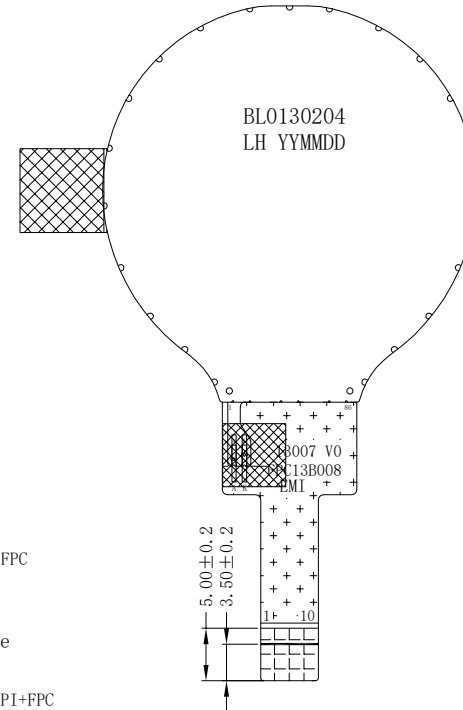

Pin	Logic
1	LEDA
2	VCI
3	CS
4	RESX
5	SCL
6	SDA
7	D/CX
8	SPI4W
9	LEDK
10	GND

NOTE:

- DISPLAY TYPE:1.28", TFT-LCD, 262K COLORS
- DISPLAY MODE:NORMALLY BLACK/IPS
- VIEWING DIRECTION:ALL
- LCM DRIVER IC:GC9A01 (COG)
LCM Interface:3/4 Serial Interface
- VCI:2.5~3.3V(TYP.)
- OPERATING TEMP: -20° C TO 70° C
STORAGE TEMP: -30° C TO 80° C
- BACK LIGHT:LED WHITE, 2 LED, 40mA, 2.8~3.2V
- RoHS COMPLIANT.



B/L Circuit

SPI interface SET for IM PINS.

SPI4W	SPI Module	DB Pin in use
0	SPI 3L	CS, SDA, SCL
1	SPI 4L	CS, SDA, SCL, D/CX

TOLERANCE(公差)		DRAWING NAME	013QVFS017	
PARTS NO.		99013016A		
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X±0.3 X.XX±0.2	Drawn		Unit
		Checked		mm
Scale 1:1		Approve		Page 1/1