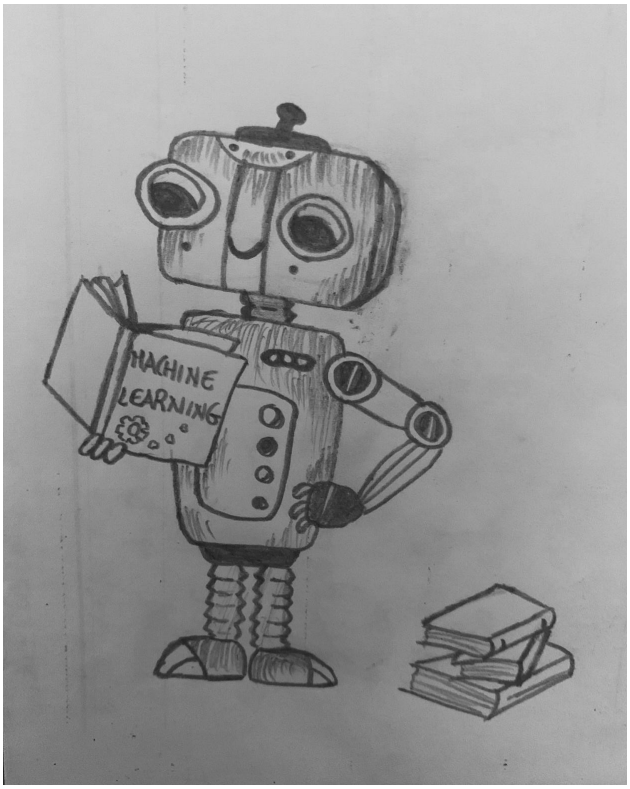

FPGA-based Tensor Accelerator for Machine Learning

Erasmus Master thesis in Computer science and engineering

Francesco Angione

Department of Computer Science and Engineering
CHALMERS UNIVERSITY OF TECHNOLOGY
UNIVERSITY OF GOTHENBURG
Gothenburg, Sweden 2020

Master's thesis 2020

FPGA-based Tensor Accelerator for Machine Learning

Francesco Angione

Department of Computer Science and Engineering
Chalmers University of Technology
University of Gothenburg
Gothenburg, Sweden 2020

Supervisor: Pedro Petersen Moura Trancoso, Department of Computer Science and Engineering, Chalmers University of Technology
Home Supervisor: Paolo Bernardi, Department of Control and Computer Engineering, Polytechnic of Turin
Examiner: Per Larsson-Edefors ,Department of Computer Science and Engineering, Chalmers University of Technology

Master's Thesis 2020
Department of Computer Science and Engineering
Chalmers University of Technology
SE-412 96 Gothenburg
Telephone +46 31 772 1000

Cover: A robot involved into the self learning process, reading. Thanks to Mariateresa Angione, CopyRight free Image.

Abstract

Part of a Neural Network inference execution mainly consists in multiplications and additions, basic operation of tensor convolutions, and across several execution data, especially weight tensors, are reused. Clearly, those operations are executed on a CPU but, as it is well known, they are independent of each other and therefore they can be executed in parallel by the means of parallel architectures, such as GPU or domain specific hardware platform. In the following pages, the state-of-the-art for accelerating Neural Network inference is explored starting from the newest proposed GPGPU architecture by NVIDIA to the domain specific accelerator from Google, NVIDIA, and Habana.
With the state-of-the-art awareness, a hardware accelerator capable of execution tensor convolution, compute and memory intensive operation of a Neural Network, is designed from scratch. It is also designed for accommodating different data type computation request from Neural Network models, ranging from integer8/16/32/64 to floating-point 32 and brain floating-point 16. Starting from the hardware system development, through the software development of a library capable to use the underlying hardware, it ends with integration into a popular Machine Learning framework, Tensorflow.
The work is carried out on a configurable hardware, FPGA, which allows to explore different design points, in terms of latency and number of processing elements, for different Neural Network models and data type. Moreover, the impact of integrating the accelerator into the Neural Network model is measured and compared with different platforms. Energy consumption is also estimated in the case of deployment on mobile devices.

Keywords: Computer, science, computer science, engineering, hardware, accelerator, machine learning.

Acknowledgements

It is always hard to write this part of a work. I would say it is the hardest part, more than the technical one.
However, let me try to address it anyway. I am apologizing in advance if i will forget something.

This work is the sum of five years of experiences, from a technical and non-technical point of view, and it has been developed during a terrible event, a pandemic, which has literally stopped the entire world and caused death, issues and debates. However, as the human race has always been, we are resilient to everything, and we tried as much as we could to not let the world stop, especially thanks to technology, Internet and all the related services. We are just human, but we can do whatever we can image, especially in Computer Science.

First, I would like to thank my family for all their support and presence, even when i was going counter current in my life. I would like to thank to both my supervisors Prof. Paolo Bernardi and Prof. Pedro Petersen Moura Trancoso for believing in me without any guarantees on the final work, and their support through this journey.

To the day in which I learned how to read, an important pillar of my life.
To the people who have contributed, in badness and goodness, to make me the person who i am today.
To my past and future failures, where I have built and I will build myself.
To my feelings, which remember us how much we are fragile but at the same time they remind us that we are human being, and we gather our strength from them.
Sapere aude.

Francesco Angione, Gothenburg, September 2020

Contents

List of Figures

List of Tables

1
Introduction

Machine learning is one of the hot technologies today as it is being used to solve complex problems that would otherwise be very hard or costly to solve with traditional methods. Speech and image recognition as well as many other complex decision-making problems such as self-driving vehicles are successfully solved with machine learning and deep-learning.
In the last years, the number of published papers regarding Machine Learning have growth exponentially, and the success of machine learning has been driven by the current available hardware which could provide the required demands in terms of storage and compute capacity. But obviously as problems scale so do the demands and thus companies has started to develop, deploy and sell their own hardware platform, such as Tensor Processing Unit [1] from Google, NVDLA[2] from Nvidia and Gaudi [3] and Goya [4], respectively for training and interference, from Habana (acquired by Intel).

The use of commodity hardware is not the most effective and efficient way to execute Machine Learning, so research is looking at flexible hardware solutions [5] [6] that can satisfy the required demands for different Machine-Learning models but at lower cost and energy consumption in order to be deployed also on mobile devices. Moreover, during the inference process, a model does not need high precision computations [7] [8] for achieving high accuracy into its outputs. As it is very well-known, hardware accelerators are capable, if designed correctly, of delivering a lot of improvements in terms of the latency but also in terms of energy efficiency [9]. Thus, in order to obtain the best solution in every metric a hardware-software co-design is needed, requiring to the hardware designer a basic knowledge of machine learning algorithms.

Machine Learning includes two processes, the training and the inference. The training process is done off the field, on powerful machines, exploiting different algorithms for optimizing the models in terms of memory footprint, data type and feedback mechanisms for fine-tuning the weight values. On the other hand, the inference process is the execution of the trained model, applying the inputs and expecting the correct outputs. It is done on the field, for example a mobile device, which is area and energy constrained. The inference process is massive composed of multiplication and addition and on a normal CPU-based system they are executed sequentially, increasing the latency of the model and the energy consumption due to data movement.

Thus, the goal is to develop a hardware accelerator from scratch, which implements a tensor-based convolution. Exploiting a non Von Neumann architecture and data locality and reuse for weights reduces the CPU workload and boost the models performance. The use of different arithmetic data type can drastically reduce the computations without reducing the final accuracy of the Neural Network [7] [10]. From a hardware perspective, the use of different arithmetic precision [11], such as the use of integer operations instead of floating-point operations, can lead to benefits in terms of area, energy consumption and latency.

In order to have the possibility of exploring different solutions, in terms of size and latency, of the accelerator the work is deployed on FPGA and it is integrated into a common Ml-Framework, Tensorflow. Accuracy of operations, reliability, performance and energy efficiency are evaluated and compared to the implementation of the same models executed on a GPU.

2

Background

Can a machine think?
— Alan Turing, Computing Machinery and Intelligence

2.1 Overview

In the past decade many companies have started to advertise the use of AI, even if they are using a subfield of the AI, in their products and software applications. Nevertheless, the recent growth, the AI is not youth.
It takes one of its roots from a theoretical paper of *Alan Turing* published by journal *Mind* in the 1950 [12].

The general definition of Artificial Intelligence (AI): *intelligence demonstrated by machines, any device that perceives its environment and takes actions that maximize its chance of successfully achieving its goals* [13].
In general, "artificial intelligence" is used when machines mimics the cognitive functions of the human mind, i.e. learning and problem solving.

According to the definition, AI is too vast to be studied and simulated [13]. Therefore, it has been divided into subfields, characterized by different traits, such as knowledge representation, planning, learning, natural language processing, perception, motion and manipulation, social intelligence and general intelligence.

Artificial Intelligence can be seen as a general purpose technology. It does not exist a general task on which it excels neither how to characterize them.

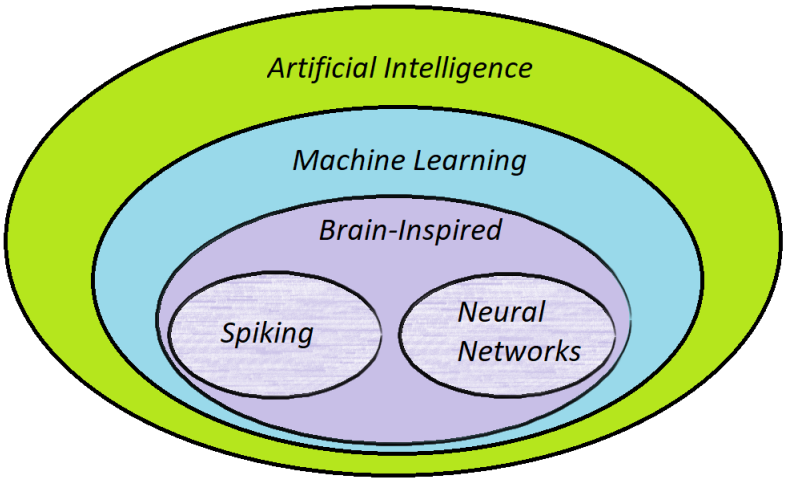

Figure 2.1: Classification of AI with emphasis on Machine Learning and its subclassification

2.2 Machine Learning

A particular interesting subcategory of AI in Computer Science is the machine learning. It is the study of algorithms used to perform a specific task without explicit programming the machine, relying on patterns and inference, in order to make decisions.
This approach is used where it is tricky, or unfeasible, to develop a conventional algorithm for solving the task.

A peculiarity of machine learning model is that it is composed of two processes, training and inference.
The inference process is the process in which a conclusion is given at the end of the evaluation process, i.e. the input stimulus are applied to the model and the output is observed.
The training process has to be done before the model is put on the field, before the inference process, otherwise the latter can give wrong results. As the name suggests, in this process the model learns how to behave, adjusting the weight accordingly to the applied inputs and expected outputs.

Besides this type of training and according to [13], other exists, characterized by approach, type of data and tasks:

- Supervised Learning, it builds a mathematical model of a set of data that contains both the inputs and the desired outputs.
- Unsupervised Learning, it takes a set of data that contains only inputs and find structure in the data.
- Semi-supervised Learning, it falls between unsupervised learning and supervised learning.
- Reinforcement Learning, it concerns how software agents should take actions

in order to maximize some notion.
- Self Learning, It is a learning with no external rewards and no external teacher advices.
- Feature Learning, also called representation learning algorithms, often attempts to transform data and preserve at the same time. It is used as a preprocessing step before any classification or predictions.
- Sparse Dictionary Learning, it is a feature learning method where a training example is represented as a linear combination of basis functions, and is assumed to be a sparse matrix.
- Anomaly Detection, also known as outlier detection, identifies rare items, events or observations which are significantly different from the majority of data.
- Association Rules, it is a rule-based method for discovering relationships between variables in large databases.

Machine learning space is also divided into other type of models such as decision tree, support vector machines, regression analysis, Bayesian networks and genetic algorithms. As it can be seen in Figure 2.1 Brain Inspired machine learning is also divided in subcategories.

2.2.1 Brain Inspired

It is based on algorithms which take its basic functionalities from our understanding of how the brain operates, trying to mimic the functionalities.

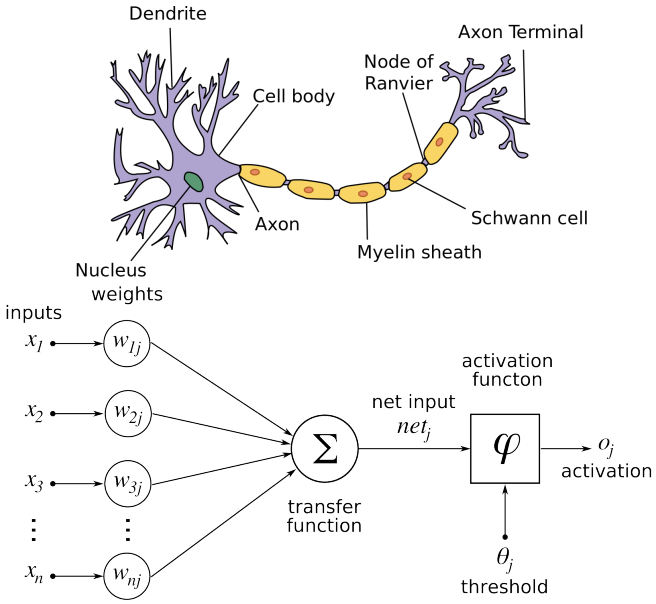

Figure 2.2: A parallelism between a human-brain neuron and a neuron in a Brain Inspired Network[1]

In the human brain, the basic computational unit is the neuron.
Neurons receive input signal from dendrites and produce output signal along the axon which interacts with other neurons via synaptic weights.

The synaptic weights are obtained after a learning process, which can strengthen them or not.

2.2.1.1 Neural Networks

Neural Networks (or Artificial Neural Networks) are graphs in which every node is interconnected to others using edges, which have a weight properly tuned during the training process.

As mentioned before, each and every node of the neural networks is called artificial neurons (a loosely model of its biological counterpart) and the connections (synapses in biological brain) can transmit information from a neuron to another. In Figure 2.2 the neurons receive signals, which is processed internally, and then they propagate it to the other connected neurons.

The information exchanged between a neuron and another is a real number, a result of a non-linear function of the sum of all its input.
In the Figure 2.3 an implementation of a Neural Network can be appreciated.

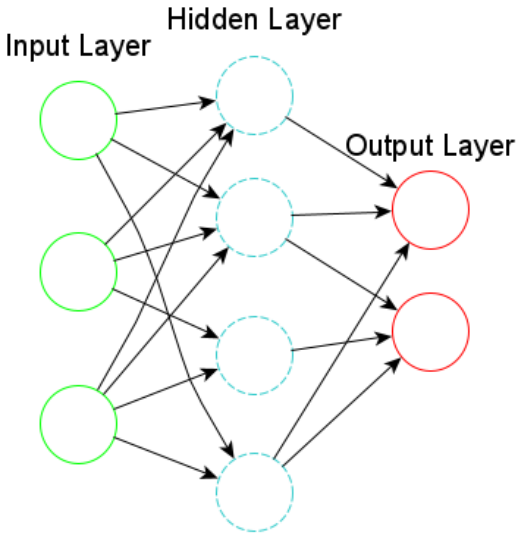

Figure 2.3: Example of a Neural Network

As it can be seen in Figure 2.3, it is always divided in layers in which only the output and input layers are visible from the external world, as consequence the internal layers are called hidden layers. When an input vector is applied, it will propagate from the left side of the network to its right side through the layers and the neurons which compose each layer. It is worth to mention that layers may perform different kind of computation on their inputs. Moreover, the deep neural networks are named after the huge amount of hidden layers.

[1]Figures under CC license

In the early stages of ANNs the goal was to solve problems as the human brain would do. However, over time, the aim moved to perform specific tasks, leading to a different architecture of the biological brain and brain-inspired networks (Spiking Neural Networks).

Depending on how the edges are connected and the topology, a Neural Network can be classified in several sub-types:

- Feed forward, the data move only from input layer to output layer without cycles in the graph.
- Regulatory feedback, it provides feedback connections back to the same inputs that active them, reducing requirements during learning. It also allows learning and updating much easier.
- Recurrent neural network, it propagates data backward and forward, from later processing stages to earlier stages.
- Modular, several small networks cooperate or compete to solve problems.
- Physical, it is based on electrically adjustable resistance material to simulate artificial synapses.

2.2.1.2 Spiking Neural Networks

Spiking neural networks (SNNs) are artificial neural networks that more closely mimic natural neural networks [14].

In addition to neuronal and synaptic state, in their operational model, SNNs adds the concept of time. The idea is that neurons in the SNN do not activate at each propagation cycle but rather activate only when specific value is reached.

The current activation level is modeled as a differential equation and it is normally considered as neuron's state.
In principle, SNNs can be applied to the same application of Artificial Neural Networks. Moreover, SNNs can model brain of biological organisms without prior knowledge of the environment. Thus, SNNs have been useful in neuroscience for evaluating the reliability of the hypothesis on biological neural circuits but not in engineering.

SSNs are still lagging ANNs in terms of accuracy, but the gap is decreasing and has vanished on some task[15]. However, computer architectures based on SNN have a huge energy footprint compare to other types of architecture [16].

2.3 Machine Learning Quantization

The reduction of computation demand, the increase of power efficiency and the memory footprint of machine learning algorithms can be achieved through the quantization.

Quantization is basically a set of techniques which convert, and map, input values from a large set to output values in a smaller set.

The idea of Quantization is not recent, it has been introduced since the birth of digital electronics. Imagine taking a picture with the phone's camera, the real world is analog and the camera is capturing the analog world and converting it into a digital format. Nevertheless, the high quality of nowadays pictures, quantization is not lossless.

A trivial quantization example for Neural Network model is given in the below figure, where a set of potentially infinite value(floating-point) are mapped to finite values (integer).

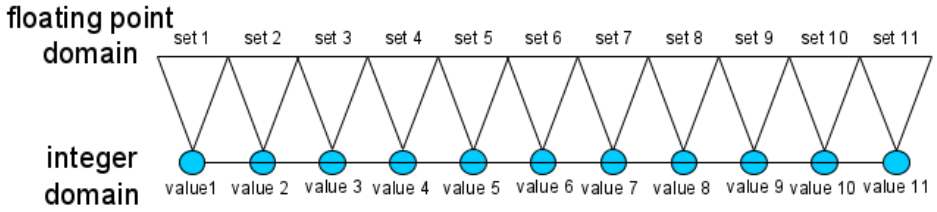

Figure 2.4: Approximation of floating-point values to integer values

It has been proved that even if the model has been quantized, for example from fp32 to integer32, its accuracy is still good and the accuracy drop between the two data representation is negligible [7].
Several quantization techniques can be applied, together or separated, to already trained ML models (post-training quantization):

- Linear quantization: data are directly scaled by taking their maximum value and normalizing them to falling in the desired range.
- Outlier channel splitting [17] : linear quantization is sensitive by large inputs. The idea of OCS is to reduce the value of outliers (for both weights and activations) duplicating the node with halving the output or the weight. This transformation leaves the node functionality equivalent while at the same time it narrows the weight/activation distribution allowing a better linear quantization.
- Analytical Clipping for Integer Quantization [18]: it represents the state-of-the-art for the post-training quantization techniques. It basically consists into apply a clipping function in a given range in order to reduce the quantization noise.

On the other hand, a quantization-aware training can also be done [19].
Quantization has lead to a relief of hardware computation, as it is very well-known floating-point operation are much more expensive than integer operation from a lot of perspectives, and as consequence a reduction into the power consumption of the algorithm. It is also important to mention that the data traffic between the memory and the hardware is reduced due to the compaction of data.

Nowadays, edge devices take advantage of lower precision and quantized operations, including GPUs. Thus, quantization of machine learning algorithms is a defacto standard for edge inference.

2.4 Applications

In principle the AI can be applied to any intellectual tasks [13]. Focusing on machine learning applications, they can spread through a variety of different domains:

- Healthcare, mainly used for classification purposes.
- Automotive, used in self-driving cars.
- Finance and economics, to detect charges or claims outside the norm, flagging these for human investigation. In banks system for organizing operations, maintains book-keeping, investing in stocks and managing properties.
- Cybersecurity, automatically sort the data in networks into high risk and low-risk information.
- Government, for paired with facial recognition systems may be used for mass surveillance.
- Video games, it is routinely used to generate dynamic purposeful behavior in non-player characters.
- Military, enhancing Communications, Sensors, Integration and Interoperability.
- Hospitality, to reduce staff load and increase efficiency.
- Advertising, it is used to predict the behavior of customers from their digital footprint in order to target them with personalized promotions.
- Art, it has inspired numerous creative applications including its usage to produce visual art.

However, all the Machine Learning applications are characterized by the need of a huge amount of data set for the training process.

3

State-of-the-Art

3.1 Overview

The role of Machine Learning has continuously growth in the past few years and a lot of efforts have been done for developing good software APIs in order to address different needs and domains.
In principle, all the machine learning algorithms can be run on the CPU, which already runs the OS and other Application Software. This leads to overheads, especially in terms memory accesses which are expensive in terms of energy and latency.

Analyzing machine learning algorithms comes evident that they massively do the same operations and access to data with some kind of patterns. Thus, with the outcome of the new paradigm for the GPU, the General Purpose GPU programming comes in handy that implementing those algorithms on a GPU, which matches the Machine Learning algorithms requirements regarding the massive operations and the reuse of data, has given a lot of advantages in terms of latency and energy efficiency. However, the capability of GPU of running machine learning algorithms has been pushed almost at the maximum with the increase of computation demands in modern neural networks. Therefore other solutions have been explored, such as the development of specific hardware platform.

3.2 GPU

The Moore's law is reaching the end from the point of view of CPUs. However, it seems that the GPUs can still carry on the Moore's law [20].
For this reason, improving efforts especially from the companies have been made for developing more and more GPUs with a higher performance per watts.

As already mentioned, with the income of general purpose GPU programming paradigm, more and more machine learning algorithms have been designed for being run on the GPU, gathering the best fruits given by that type of architecture.

As consequences, companies such as Nvidia have started to develop GPU for boosting machine learning applications performance.

3.2.1 Nvidia Ampere A100 Tensor Core GPU

The Nvidia Ampere A100 Tensor Core GPU has been announced recently and it is one of the most performant GPU. The newly added Tensor Core Unit allows massive increases in throughput and efficiency.
It is able to deliver up to 624 TFPLOPS[1] for training and inference machine learning applications.

The GPU is composed of multiple GPU processing clusters (GPCs), texture processing clusters (TPCs) and streaming multiprocessors (SMs). The core of the GPU is the Streaming Multiprocessor, which is built up from the SM of Volta GPU and Turing one.

Figure 3.1: Streaming Multiprocessor Architecture [21]

Composed of integer, FP32, FP64 units and the Tensor Core Units are designed specifically for deep learning. It introduces also new data types in the tensor core for the computation such as binary, integer 8 and 4 bits, floating-point 64, 32, 16 and bfp16 (the throughput of the tensor core computation for fp16 and bfp16 is the same). The Ampere SM can achieve such efficient workload on mixed computation and addressing calculations thanks to an independent parallel integer and floating-point data paths.

[1] floating-point operations per second

Matrix-Matrix multiplication operations are at the core of neural network training and inference, and are used to multiply large matrices of input data and weights in the connected layers of the network. The idea is represented into the Figure 3.2 and compared to previous architectures.

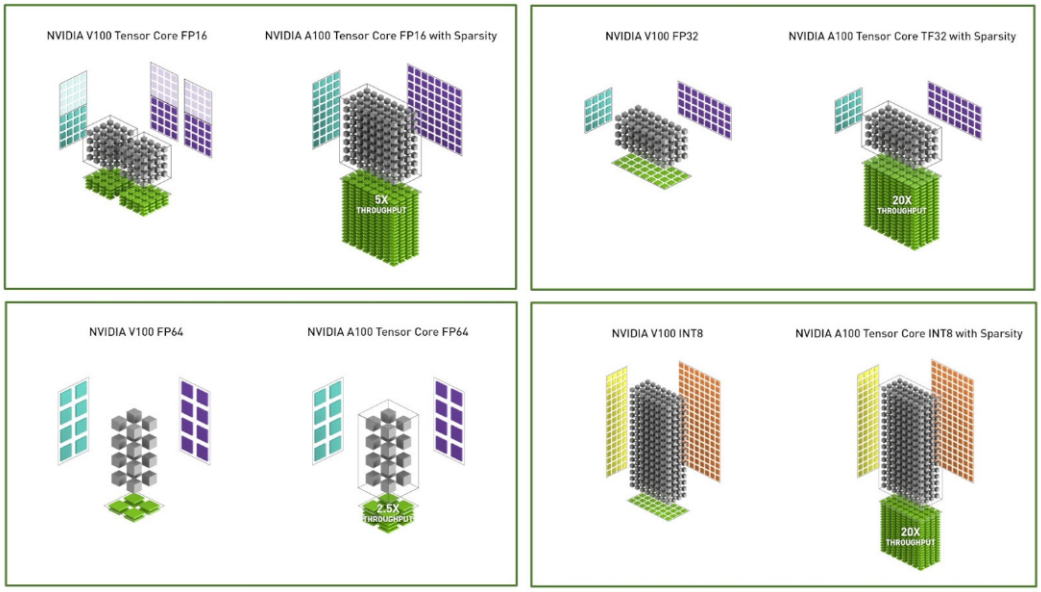

Figure 3.2: Matrix Multiplication in Tensor Core [21]

The Ampere A100 GPU contains 108 Streaming multiprocessor, and 432 third generation Tensor Core. According to Figure 3.3 the Tensor Core Units are able to compute multiplications on FP16 and accumulate on FP32, leading to a further reduction of latency and energy consumption.

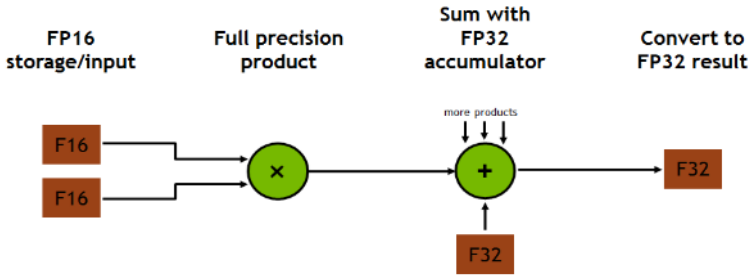

Figure 3.3: Mixed Precision Schema of a FMA unit in Tensor Core Unit [21]

A novel approach for doubling the throughput of deep neural networks has been introduced in this architecture. At the end of training process, only a subset of the total weights are necessary to execute a neural network correctly. As consequence not all the weights are needed, and they can be removed.

Based on training feedback, weights can be adapted at runtime during the training and this does not have any impact on the final accuracy. Thus, thanks to the

sparsity of weight tensors., inference process can be accelerated. In addition, also the training process can be accelerated exploiting the sparsity idea but it has to be introduced at the beginning of the process for achieving some benefits.

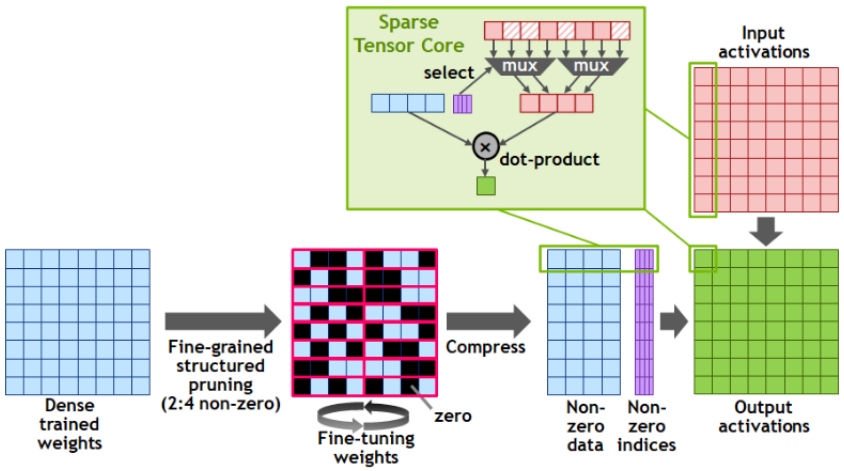

Figure 3.4: Sparsity Optmization of a weight tensor [21]

The apporach in Figure 3.4 doubles the throughput by skipping the zeros. It also leads to a reduction of memory footprint and an increase into the memory bandwidth.

Following the idea, NVIDIA has introduced a new set of instruction for inference: sparse Matrix Multiply-Accumulate (MMA). Those instructions are able to skip the matrix entries which contain zero values, leading to an increase of the Tensor core throughput. An example can be seen in Figure 3.5, where the light blue matrix has a sparsity of 50%. It is also important to mention that the non-zero entries of the light blue matrix will be matched with the correct entries of the red one.

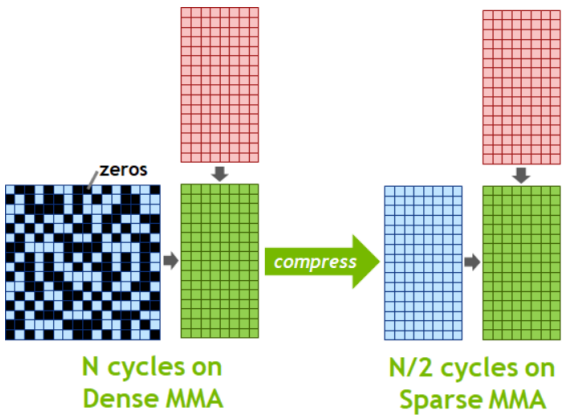

Figure 3.5: Matrix Multiply Accumulate [21]

The deep learning frameworks and the CUDA Toolkit include libraries that have been custom-tuned to provide high multi-GPU performance for each one of the following deep learning frameworks in the Figure 3.6.

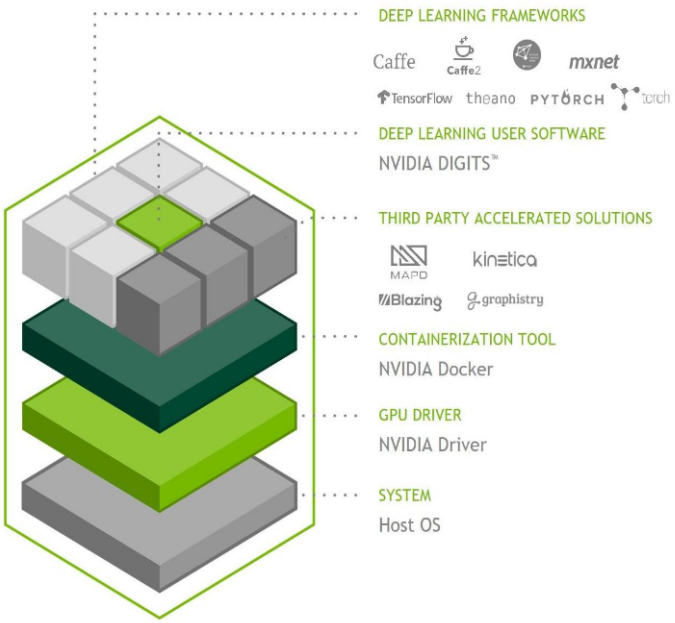

Figure 3.6: Software stack [21]

Combining powerful hardware with software tailored to deep learning, it provides to developers and researchers solutions for high-performance GPU-accelerated deep learning application development, testing, and network training.

3.3 Domain Specific Hardware Platform

Instead of developing GPUs also suitable for Machine Learning applications, the companies have designed and deployed special purpose hardware accelerators.

3.3.1 NVDLA

The Nvidia Deep Learning Accelerator is a free open source hardware platform from Nvidia, highly customizable and modular, which allows to design and deploy deep learning inference hardware.
The architecture comes in two configurations:

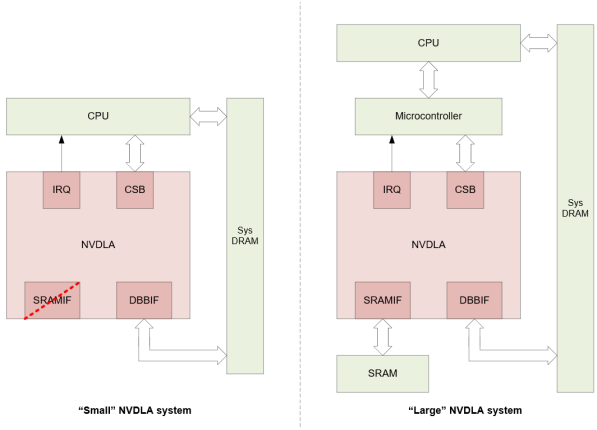

Figure 3.7: Comparsion of two possible NVDLA system [22]

As already mentioned, the aim of the work is to develop a hardware accelerator for machine learning suitable for mobile devices. Therefore from now on the NVDLA small system will be considered and analyzed.

The internal architecture of the NVDLA small system is:

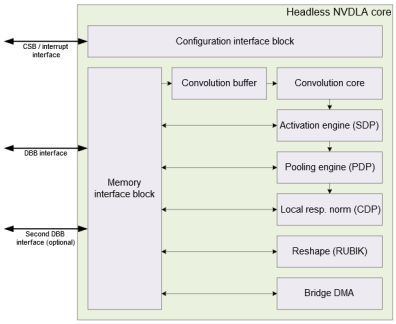

Figure 3.8: Internal architecture of NVDLA small system, Secondary DBB not considered [22]

According to Figure 3.7, for the Small configuration of the accelerator, the processor will be in charge of programming and scheduling the operations on the NVDLA

and as consequences handles the start/end of operations and possible interrupts, all of them through the CSB (Configuration Space Bus) interface which is AXI Lite compliant[23].
The data movement to/from memory are handled by the Internal memory controller through the DBB (Data BackBone) interface, which is AXI [23] compliant.

The internal architecture of NVDLA is composed by various engines. Each one of them is able to perform specific Machine Learning operations:

- Convolution Core: it comes in pair with the Convolution Buffer, its private memory for the data (inputs and weights). It is used to accelerate the convolution algorithms.
- Activation engine (Single Data point Operations): it performs post processing operations at the single data element level such as bias addition, Non-linear function, PReLU (Parametric Rectified Linear Unit) and format conversion when the software requires different precision for different hardware layers.
- Pooling engine (Planar Data Operations): it is designed to accomplish pooling layers, i.e. it executes operation along the width and height plane.
- Local response normalization engine(Cross Channel Data operations): it is designed to address local response normalization layers.
- Reshape(Data memory and reshape operations): it transforms data mapping format without any data calculation.
- Bridge DMA: it is in charge of copying data from the Main Memory to the SRAM of the accelerator, only available into the large configuration of the system.

Another possible configuration which is worth to mention is the possibility to let the engines work separately on independent task or in a fused fashion where all of them are pipelined, working as a single entity.

According to developers the configurability of the cores ranges from arithmetic precision to the theoretical throughput that a single unit can achieve (increasing the number of internal Processing Elements). Moreover, since the engine units are independent of each other, according to the application and the model used they can be safely removed from the design.

3.3.1.1 NVDLA Software

It is also worth to mention that the accelerator comes already with a basic software stack:

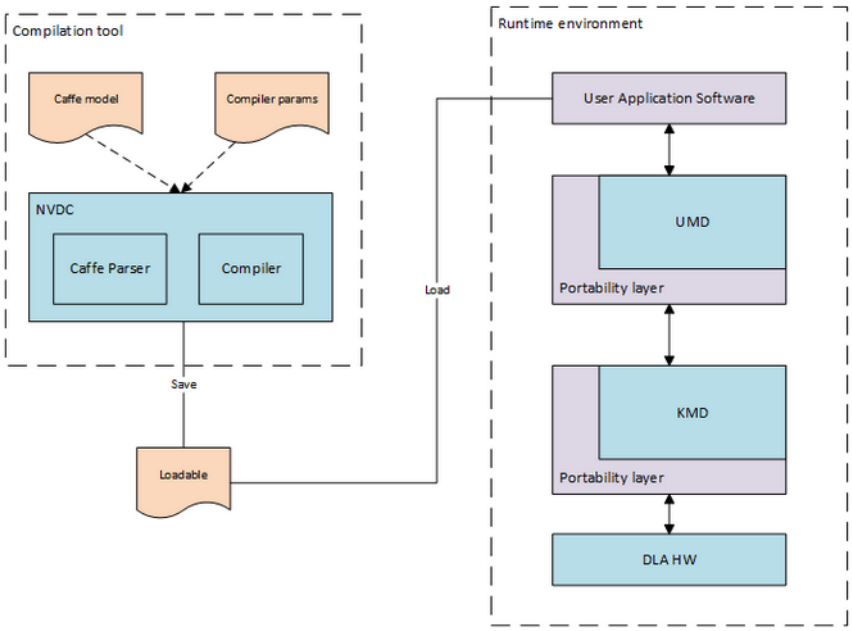

Figure 3.9: NVDLA Software stack[24]

The Compilation tools are in charge of converting existing pretrained model into a set of hardware layers (for the desired precision) and programming sequences suitable for the NVDLA. The output of this process is a Nvidia Loadable file suitable for the runtime environment.

Regarding the runtime environment, it has been designed for a system in which is present an OS. It is composed in two parts: the User Mode Driver (UMD) and the Kernel Mode Driver (KMD).
The User Mode Driver loads the loadable file in memory and submits the operation to the KMD. It is also in charge of data movement from/to the accelerator.
The KMD is in charge of submitting operations to the accelerator through low level functions, scheduling the operations and handling the interrupts.

Both the KMD and the UMD are wrapped into portability layers which are, respectively, hardware dependent and OS dependent. In principle, for migrating the software to another OS or hardware plaftorm it is enough to modify only the portability layers.

3.3.2 Google TPU

Google developed its own application-specific integragrated circuit for neural networks, which is tightly integrated with TensorFlow Software. It includes:

- Matrix Multiplier Unit (MXU): 65,536 8-bit multiply-and-add units for matrix operations
- Unified Buffer (UB): 24 MB of SRAM that work as registers
- Activation Unit (AU): Hardwired activation functions

In Figure 3.10 a general view of TPU architecture is presented.

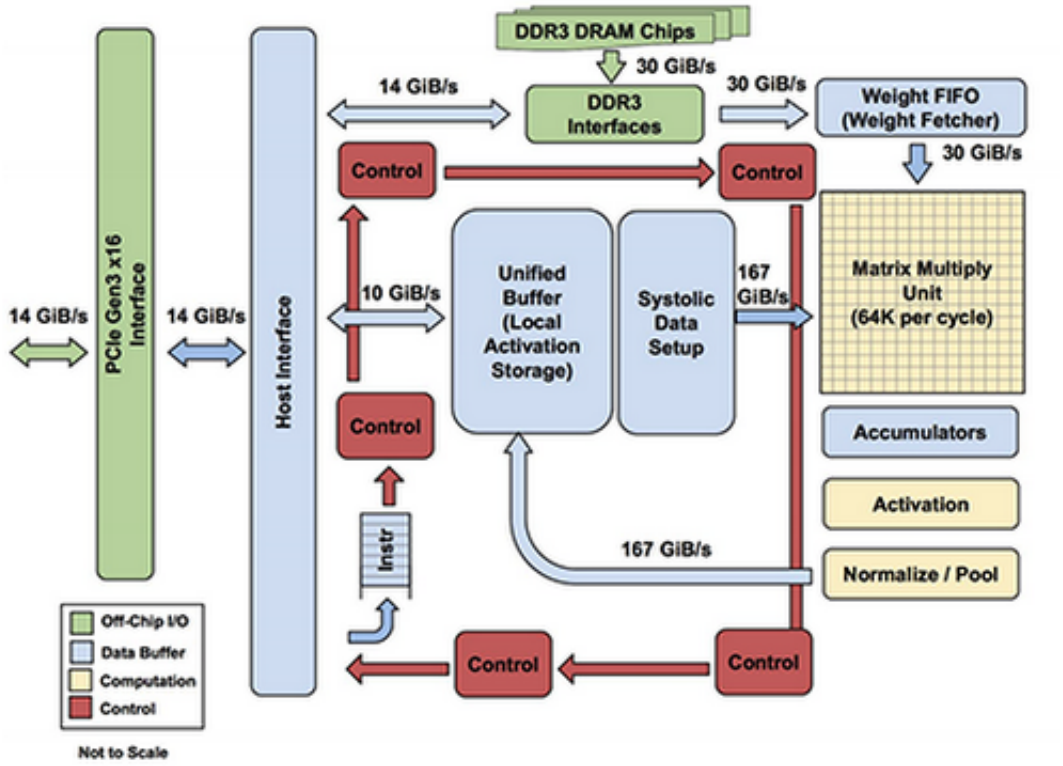

Figure 3.10: Google TPU architecture[1]

Rather than be tightly integrated with a CPU, the TPU is designed to be a coprocessor in which the instruction are sent by the host server rather than fetched.

The matrix multiplication unit reuses both inputs many times as part of producing the output, avoiding the overhead of continuously read data from memory. Only spatial adjacent ALU are connected together, which makes wires shorter and energy-efficient. The ALUs only perform computations in fixed pattern.

As far as concerned the software stack, the TPU can be programmed for a wide variety of neural network models. To program it, API calls from TensorFlow graph are converted into TPU instructions.

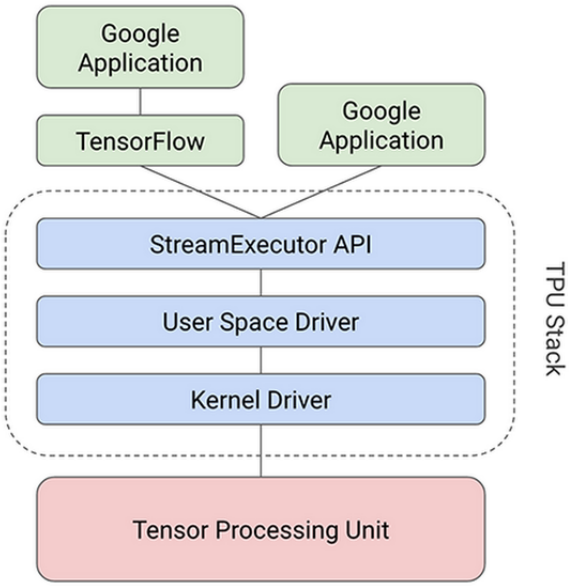

Figure 3.11: Google TPU Software Stack [25]

3.3.3 Habana Goya HL-1000

Habana's Goya is a processor dedicated to inference workloads. It is designed to deliver superior performance, power efficiency and cost savings for data centers and other emerging applications.

It allows the adoption of different deep learning models and is not limited to specific domains. Moreover, the performance requirements and accuracy can be user-defined.

In Figure 3.12 a high level view of the Goya architecture can be appreciated.

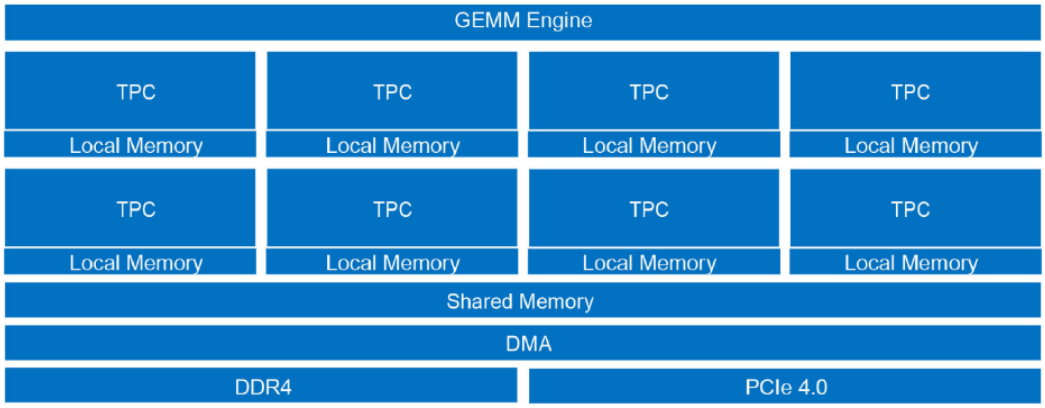

Figure 3.12: High level view of Goya architecture [4]

It is based on scalable, fully programmable Tensor Processing Cores, specifically designed for deep learning workloads.

It also provides other flexible features such as GEMM operation acceleration, special functions dedicated hardware, tensor addressing, latency hiding capabilities and different data types support in TPC (FP32, INT32, INT16, INT8, UINT32, UINT16, UINT8).

Regarding the software stack, it can be interfaced with all deep learning frameworks. However, a model has to be first converted into an internal representation, as it can be seen in Figure 3.13.

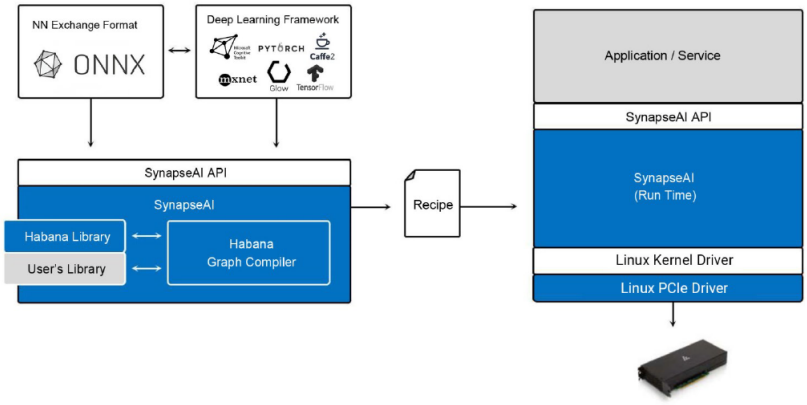

Figure 3.13: Habana Goya Software Stack [4]

It also supports quantization of models trained in floating-point format with near-zero accuracy loss.

4
System Development

4.1 Overview

As already mentioned, the use of custom hardware for a specific application can have big benefits especially in terms of energy consumption and latency.

The inference process of Neural Network is mainly characterized by massive multiply and addition operations. Fetch of data from main memory follows patterns and it has been proved that those data, in particular weight data, are reused for several executions of the Neural Network model.
As consequence, executing a Neural Network model on a von Neumann based architecture machine leads to performance degradation, even in a cache-based system, since the CPU has to request the data from the main memory, execute the operation on those data and then save back to main memory before moving to the next data. The introduction of vectored instruction in the modern processors can have a slight impact in the performance benefits. However, the drastically increase of layers in the Neural Network has made them suitable for several applications. This it can be translated into a massive increase of operations for executing them, as it can be also observed in the following Figure:

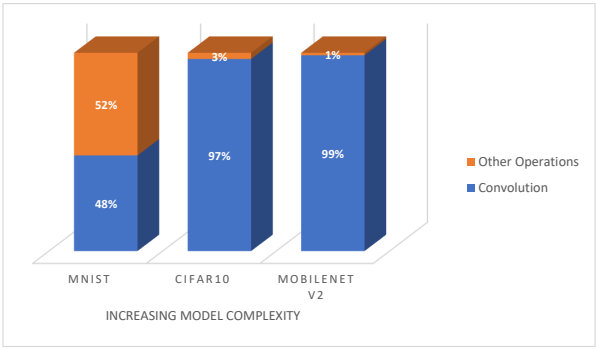

Figure 4.1: Average execution time divided by type of operations

Following the fast demands of operations into a Neural Network, it becomes evident that executing them on a CPU could not meet real-time application requirements.

Instead, the designed accelerator has a Dataflow architecture, with emphasis on weight data reuse, and it is able to execute a tensor convolution. The basic idea is a computation matrix composed in every entry of processing elements which are able to perform operation between the incoming data and the weights, which have been already loaded for exploiting a data reuse approach.

The custom hardware accelerator is not useful as it is. It has to be integrated into a ML-Framework in order to appreciate its benefits. After a preliminary research on which ML-Framework would allow to integrate a custom hardware accelerator minimizing the efforts to change the model code and its definitions, it has been evident that the TensorFlow Framework, an end-to-end open source Machine Learning platform [26], suits the needs.

The workflow of the Hardware-Software development is illustrated in the following:

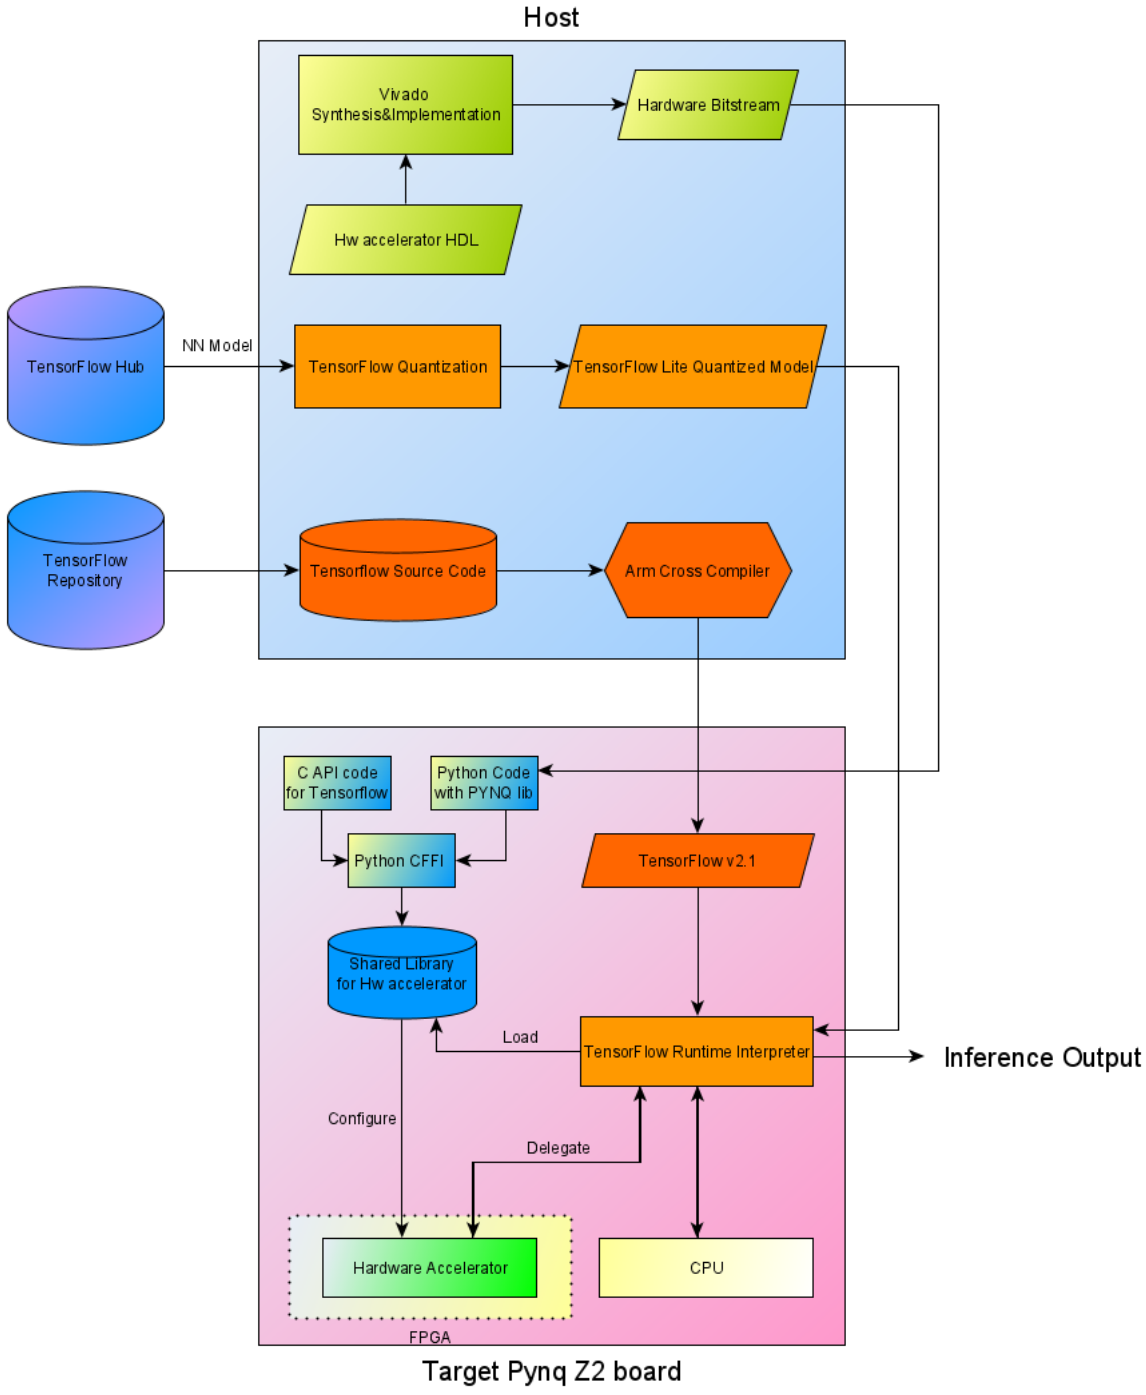

Figure 4.2: Development workflow

The entire work is implemented on a PYNQ Z2 board from TUL, based on a Zynq-7000 SoC [27]. In order to speed-up the development process and use built-in library for the AXI protocol and the DMA transfers, the software is partially carried out through the PYNQ environment of the board [28] based on Python which has became a de facto standard [29].

The usage of Python as basic software allows to easily integrate it with high level Machine Learning Framework, such as TensorFlow in this case.

4.2 Software

The focus of the work is the inference process, pre-trained models are needed and TensorFlow Hub [30] comes in handy for this purpose. It provides already pre-trained Machine Learning models for different domains. Moreover, TensorFlow has the feature of quantizing a post-trained model for different arithmetic precision. In the Fig. 4.2 it can be seen that the quantization process has been done offline.

The choice of using the stable release 2.1 of TensorFlow is dictated from the possibility of using Delegates (aka hardware accelerators or GPUs) in its Neural Network model. A delegate is a way to delegate part or all graph execution to another executor. Every model is represented, internally, as a graph (with its relative order of execution for the nodes) and every node of the graph is described as a set of operation that has to be applied to the node's input. As every node is described by a set of operations, it is easy to understand which part of the graph can be executed on the accelerator in advance, and this operation is done at the beginning when both the model and the accelerator library is loaded as it is represented in the following Figures: It is worth to mention that TensorFlow is open-source and since



(a) without delegate

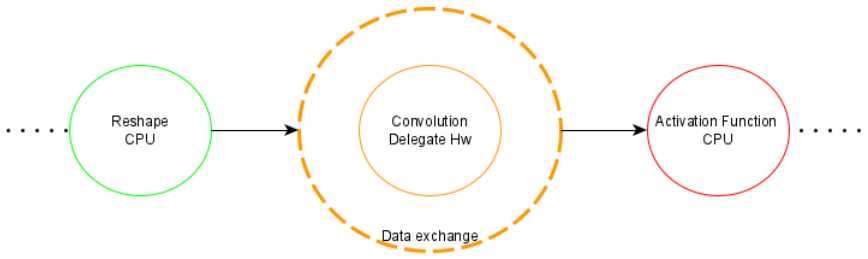

(b) with delegate

Figure 4.3: Execution Graph

no binary installations for its 2.1 release are provided for Arm processor, it has been cross-compiled from scratch for the PYNQ-Z2 board.

TensorFlow demands as library for the accelerator a C Python-API compatible shared library. In addition, the code for using the accelerator was already written using the PYNQ environment in Python. Therefore, for allowing code reuse and decreasing the development time the Python code has been embedded in the C code (from a TensorFlow example of the delegate library), adding callbacks to Python code[1].

This has been possible thanks to the Python library *CFFI* (C Foreign Function Interface) [31], which is also able to provide a shared library Python-API compatible as output. In the following Figure the flow chart between Tensorflow Lite and the accelerator library can be seen:

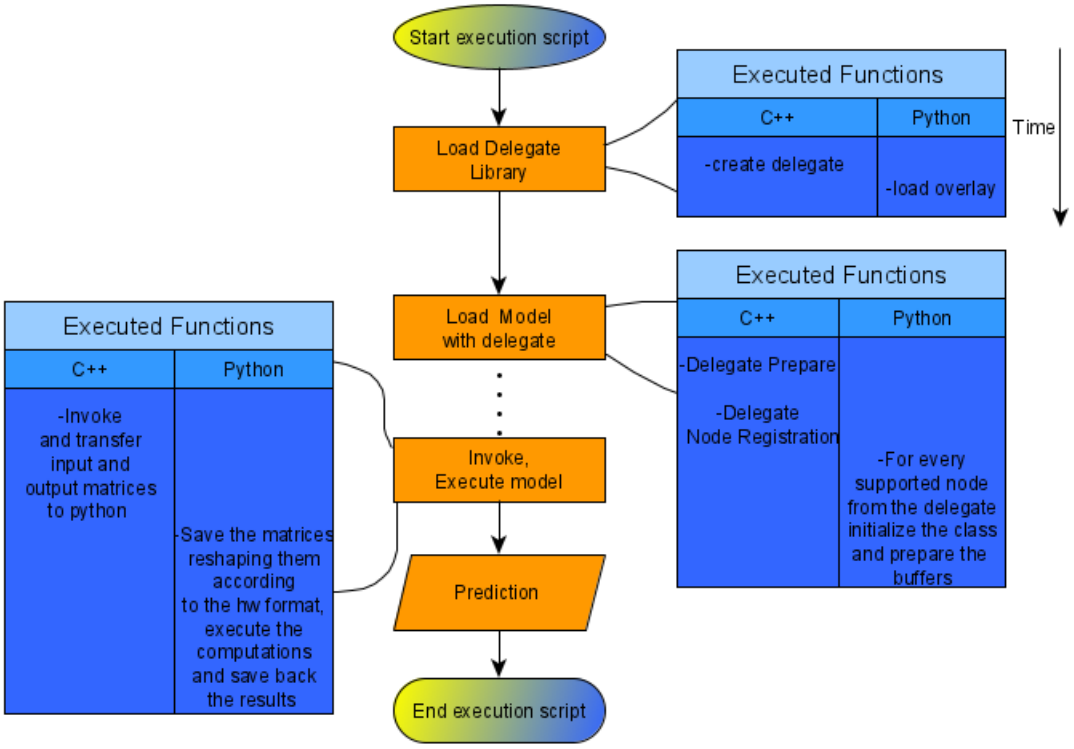

Figure 4.4: Flow Chart with accelerator

[1]See Appendix A

4.3 System Level

As it can be seen from Figure 4.5, it is divided in two big blocks:

- Processing System: The processing system (in Figure 4.6 referred as *processing system7*) is in charge of running the OS and the Machine Learning application. As consequence it also runs the necessary software for programming the accelerator registers and the data movement to/from main memory from/to the accelerator.
- Programmable Logic: The programmable logic (PL) hosts the entire design, from the accelerator itself to the DMAs and the AXI interconnections.

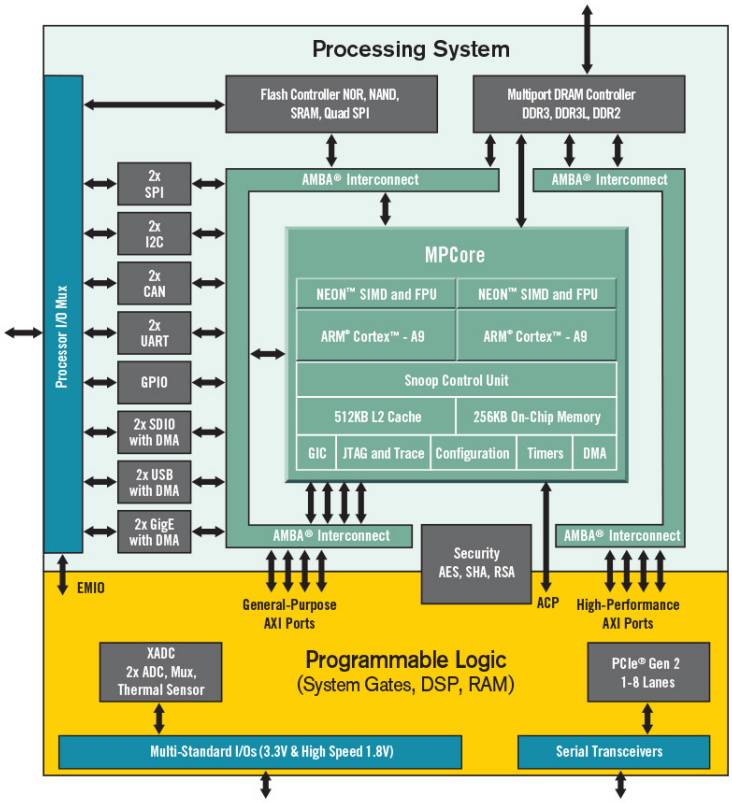

Figure 4.5: Zynq 7000 SoC [32]

Furthermore, the Programmable Logic in Figure 4.6 is hosting:

- AXI interconnections: IP cores from Xilinx [33] [34] in order to connect and correctly address entities in the Programmable Logic.
- AXI DMA: IP core from Xilinx [35] which allows data movement between main memory and accelerator memories. Several single channel DMA have been used instead of using a single DMA with multiple channels. The reason is that in the PYNQ environment only the drivers for the single channel DMA are provided.
- DTPU: the actual hardware accelerator.
- XADC: IP core from Xilinx [36] which allows to measure the temperature of the SoC, the voltages and the currents at run time.

In the following figure, the schematic of the overall design in the PL is presented.

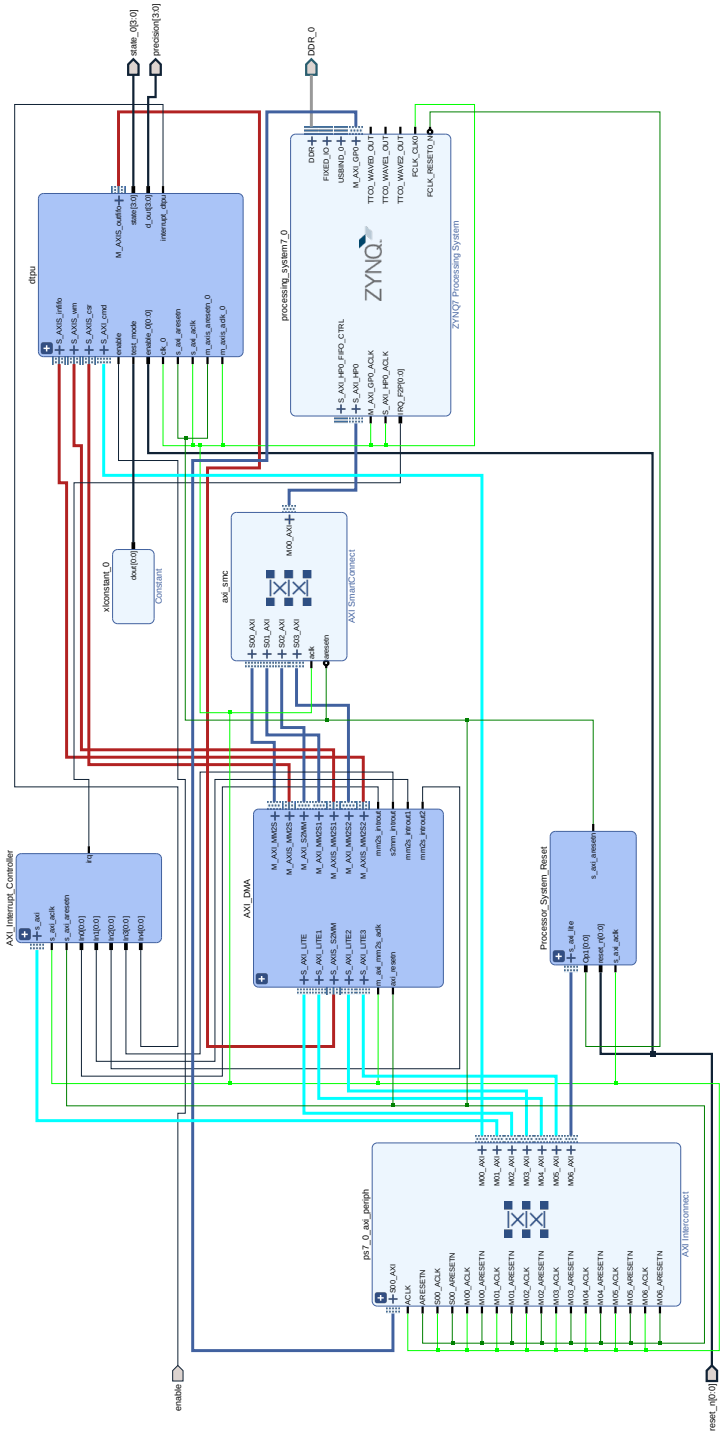

Figure 4.6: System view hosted in the PL [2]

[2]Except for the Zynq Processing system

4.4 DTPU, the hardware accelerator

The hardware accelerator, named *Cogitantium*[3], *The Dumb Tensor Processing Unit*, is in charge of carrying out the tensor convolution of the neural network model, exploiting a data-flow architecture on the input data and a data reuse for the weight data.
Figure 4.7 presents the Logical block diagram of the accelerator.

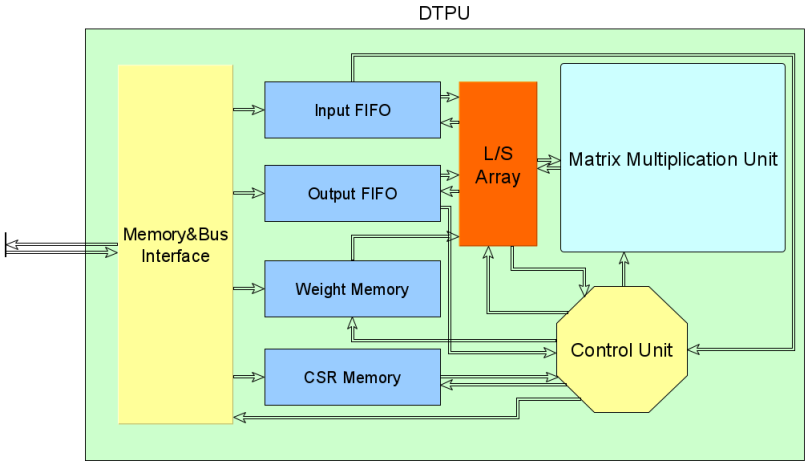

Figure 4.7: Logical view of DTPU accelerator

4.4.1 Real Implementation

The work is not focused on developing embedded memories and AXI interfaces, therefore a Xilinx's IP core, which includes all those necessary sub components, has been used [37] leading to the actual block diagram which can be observed in the Figure 4.8.

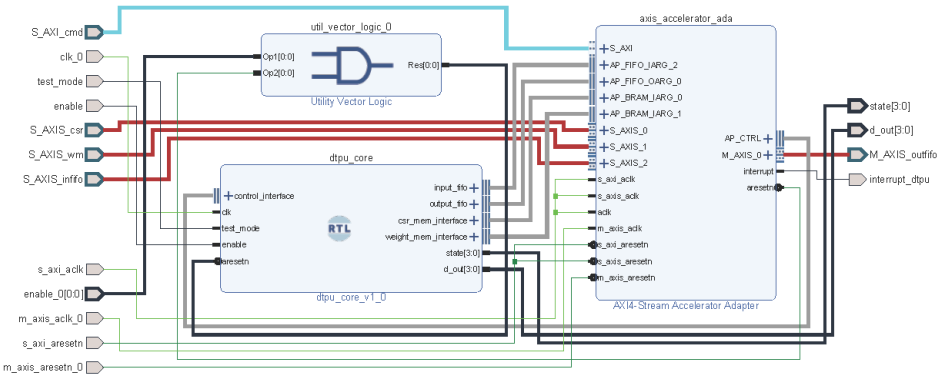

Figure 4.8: Real RTL view of DTPU accelerator

[3]Thoughtful

The latter has allowed to completely focus the work on the DTPU core[4], which has become:

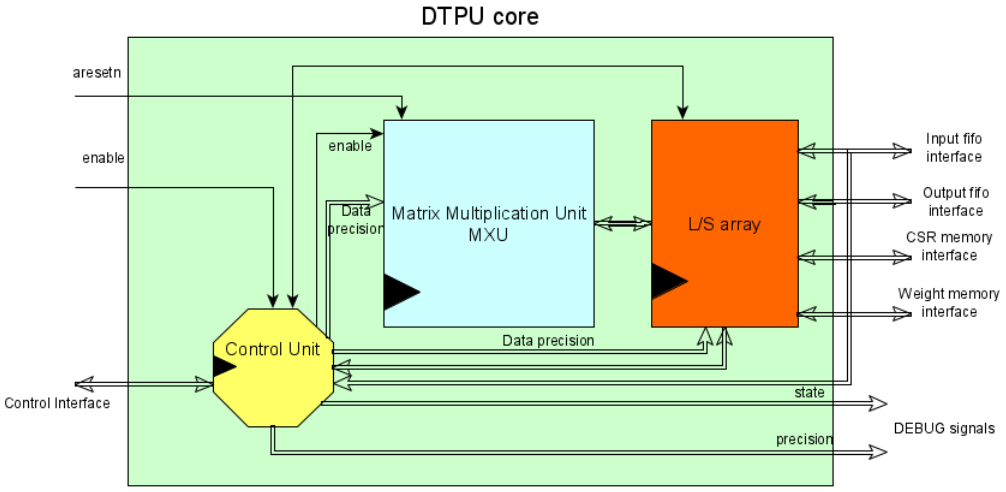

Figure 4.9: RTL view of DTPU core

Where the sub-units:

- L/S array provides the data for the Matrix Multiplication Unit, especially the weight data are reused across several executions and therefore loaded once.
- Control Unit is in charge of handling handshake signals for transferring the ownership of the data (data transferred by the DMA from the Main Memory), load the weights and activation in the respectively units and save the results to the output FIFO. Since it is a Data flow architecture, there is no control flow of the data in the core and this has allowed to keep the Control Unit as simple as possible.
- Matrix Multiplication Unit (Mxu) is the computation unit of the hardware accelerator. It executes the tensor convolution for different arithmetic precision.

[4]See Appendix B

4.4.2 High Level State Machine of Control Unit

The Dataflow architecture has allowed to design a Control unit as much simple as possible, presented in the below figure:

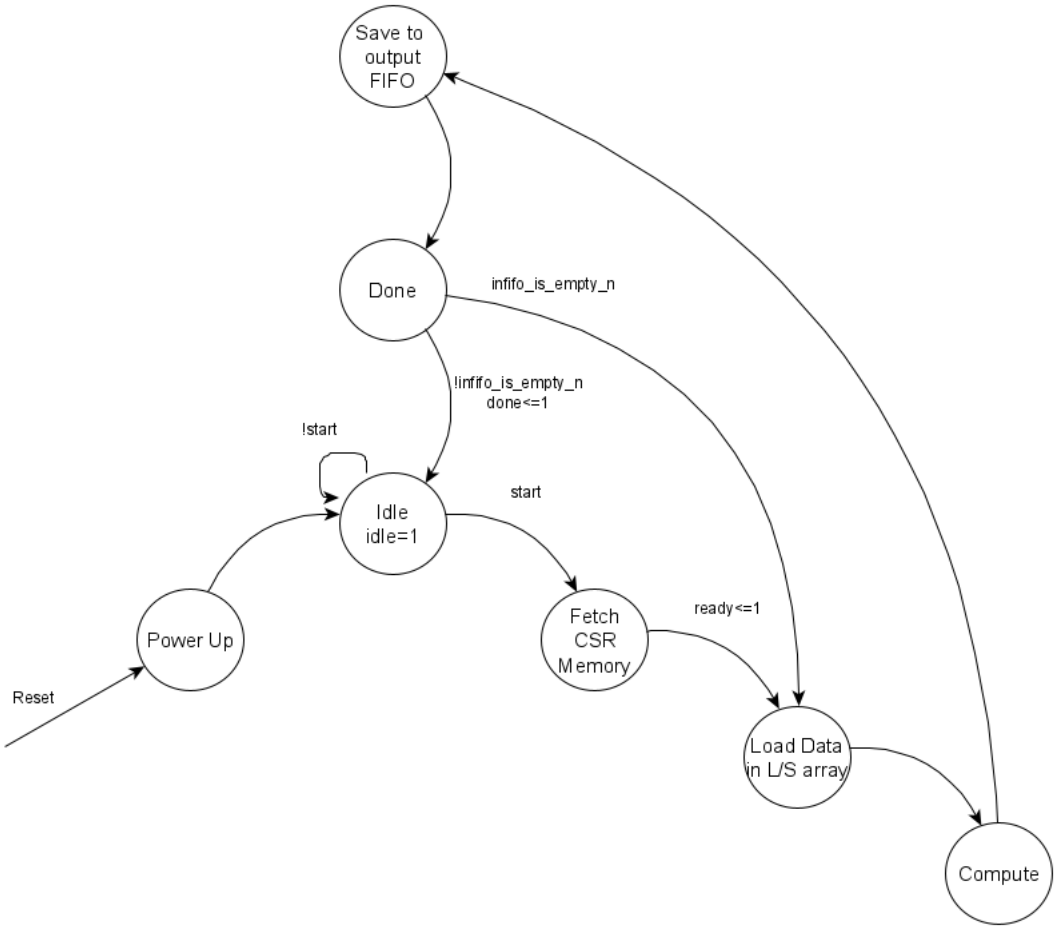

Figure 4.10: A high level view of Control Unit

In which:

- *Idle* state is waiting for the start signal from the *axis accelerator adapter* (generated when all the data have been transferred[5]).
- *Fetch CSR Memory* state is in charge of retrieving from the CSR memory the desired data precision for the computation and the starting address of the weight memory. It also notifies to the *axis accelerator adapter* that it is ready[6].
- *Load data in L/S array* state loads the correct weight values (retrieved from the weight memory) and the activation data into the correct L/S unit. The number of active L/S unit is computed at run time. It depends on from the current required data precision and the fixed number of rows and columns in the MXU.

[5]Input Data, Weight data and CSR data

[6]The ready signal is used as handshake between the core and the axis accelerator adapter for transferring the ownership of the data

- *Compute* state activates the MXU and it waits the end of computation before committing the results to the output FIFO.
- *Save to output FIFO* state saves the data stored in the active L/S units to the output FIFO.
- *Done* state, depending on the input FIFO if it is empty or not, continues the computation for the next activation data or it returns to the idle state, notifying to the axis accelerator adapter the end of the computation[7].

4.4.3 Datapath

As it is well-known, the execution of ML models is memory intensive and it consists in massive multiplication and accumulation operations. In addition, it can be seen that during execution of ML models some memory location are accessed frequently. Therefore, it is evident that a DataFlow architecture which could exploit local data reuse and compute, massively, in parallel multiplications and additions could boost the performance. The DTPU core has been designed according to the previously mentioned ideas. The datapath of the core is presented in Figure 4.11 as block diagram.

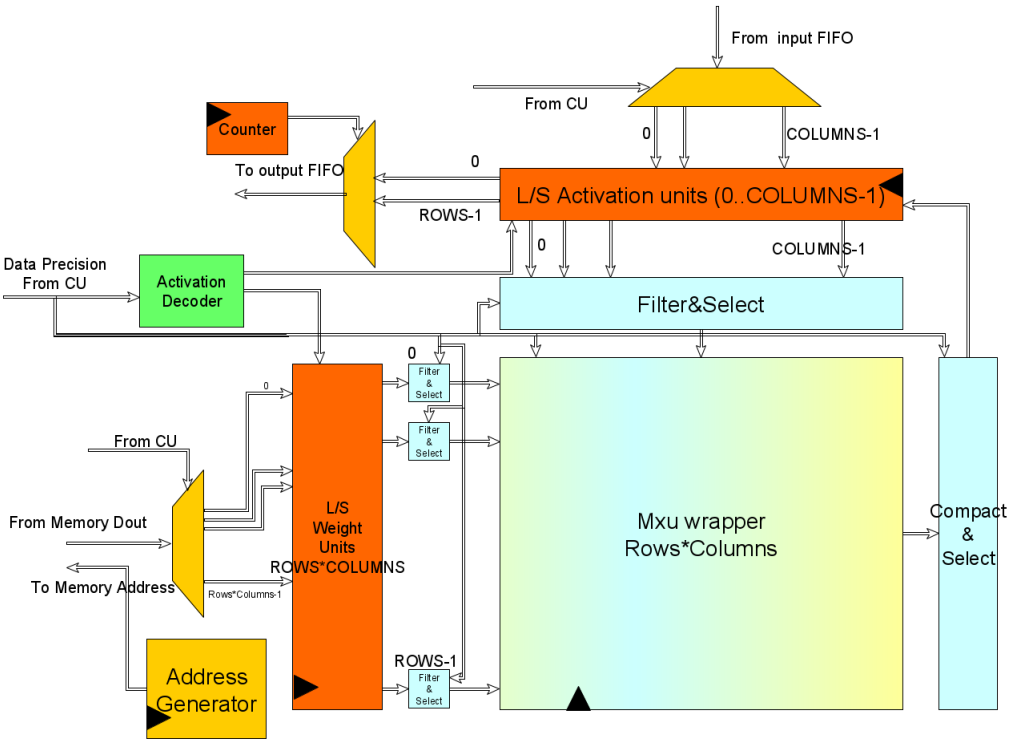

Figure 4.11: A detailed view of the DTPU core datapath. Enable and resets signals for clocked units has been omitted for improving readability.

[7]the notification for the end of computation allows the axis accelerator adapter to put the results on the output master axi stream interface in order to be transferred by the DMA

In Figure 4.11, the brawn of the accelerator is the MXU wrapper, which contains the symmetric matrix of MACs with variable precision. Regarding the other blocks:

- Activation Decoder: It is able to generate the right activation signals for the L/S units, depending on from the current data precision and MXU size.
- Muxes and DeMuxes: Their purpose is to feed the right data from/to memory to/from the right units. The counter (from 0 to ROWS-1) in the Mux for the output FIFO is for saving at every clock cycle a data in the FIFO.
- Filter&Select: depending on the precision it provides the correct data to the correct computation units.
- Compact&Select: it is the complement of the Filter&Select unit. It is able to compact the output data from the MXU wrapper and feed the store registers.
- L/S weight Units: the name L/S has been kept for consistency even if it does not have any store process since the weight are only loaded once (stationary weights) and kept until a next full execution.
- L/S Activation Units: they are in charge of loading the data from the input FIFO into batteries of Flip-Flops while at the same time they can save the results to submit late in the output FIFO.

4.4.3.1 Filter&Select and Compact&Select

In principle, for each Processing element in the MXU wrapper a weight and an activation has to be provided (and as consequence it has to be provided from its relative Load Units). However, since the data width of memories and FIFO has been fixed to its maximum, 64 bits, it comes evident that during a computation with 8 bit integer it will fetch(and save for the output FIFO), in case of a 8x8 Mxu Size, 8 values from FIFO and 64 values from the weight memory. In this scenario all the Flip-Flops of the L/S units (both activation and weights) would sample values where the 56 upper bits are always unused leading to a waste of time for the memory accesses and energy for unused data.

A clever solution is to pack data before sending them to the accelerator. Nevertheless, the pack of data requires to internally unpack and, before committing to the output FIFO, pack the results. Unpacking and packing are done, respectively, by Filter&Select and Compact&Select units. Retrieving the previous example (computation on 8 bit integer, MXU size of 8x8 and 64 bit memory data) and using the approach of unpacking and packing, this leads to use only one L/S unit for activations (8 for the L/S weight units) for both the load and store operation. With one single L/S active unit and 8 bit integer computation, an 8 bit activation data has to be distributed for each column of the MXU, and this is done by the Filter&Select unit. For committing to output FIFO, results on 8 bit will be compacted in one single data of 64 bit by the Compact&select.

A visual distribution of the data can be seen in Figure 4.12. The same can be applied for each row of L/S Weigth units.

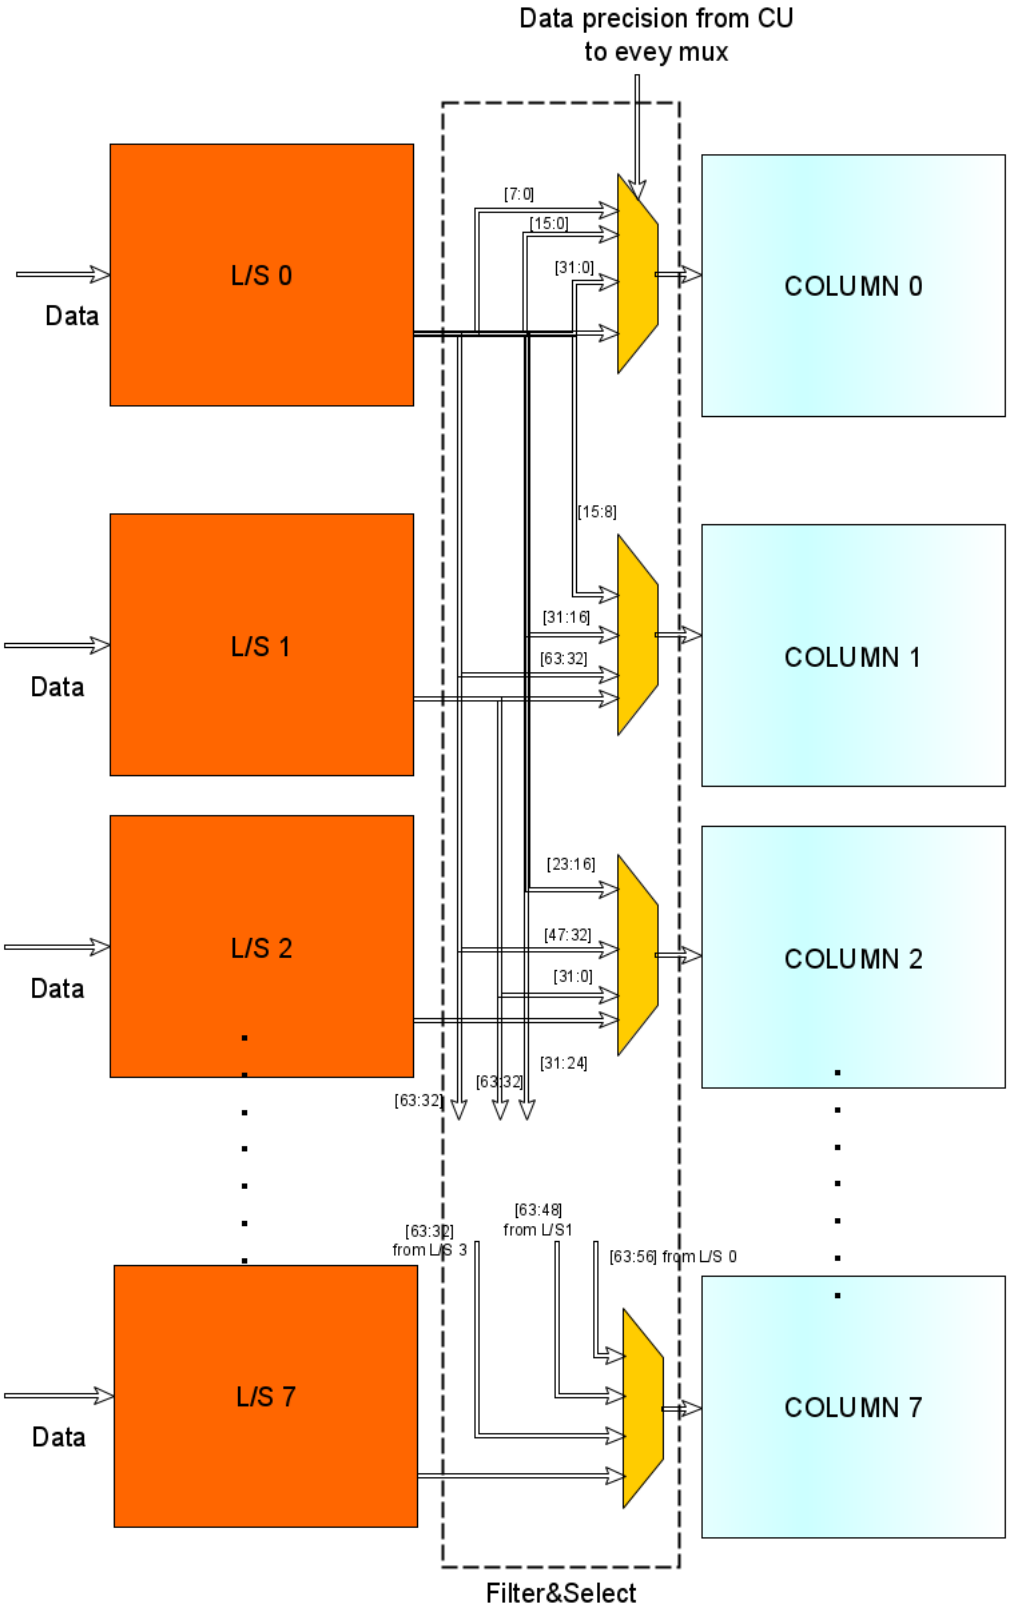

Figure 4.12: Data Distribution of Filter&Select unit for a MXU size of 8x8

In case the required precision is on 16 bit, with the same MXU size, two L/S units for activation are activated (2*ROWS for the L/S weight units) and will feed the respective Columns. The reason behind the two active L/S units is that in 64 bit, only 4 16-bit values can be packed. Increasing the MXU size, the L/S units are activated accordingly. For example, in case of a MXU size of 16x16 and integer 8 bit, two L/S units are activated (in case of integer 16 computation,4 units are activated).

This approach comes also with the overhead of packing and unpacking the data on the CPU but, on the other hand, the memory data movement is reduced and bandwidth increased, with a reduction in the energy consumption (thanks also to the reduced active L/S units).
It is also worth to mention that using size for the MXU which are power of two would maximize the memory bandwidth.

4.4.3.2 Matrix Multiplication Unit

The Matrix Multiplication Units (referred as MXU) is the muscle part of the accelerator, where the convolution is done. As the name suggest, it is organized as a Matrix:

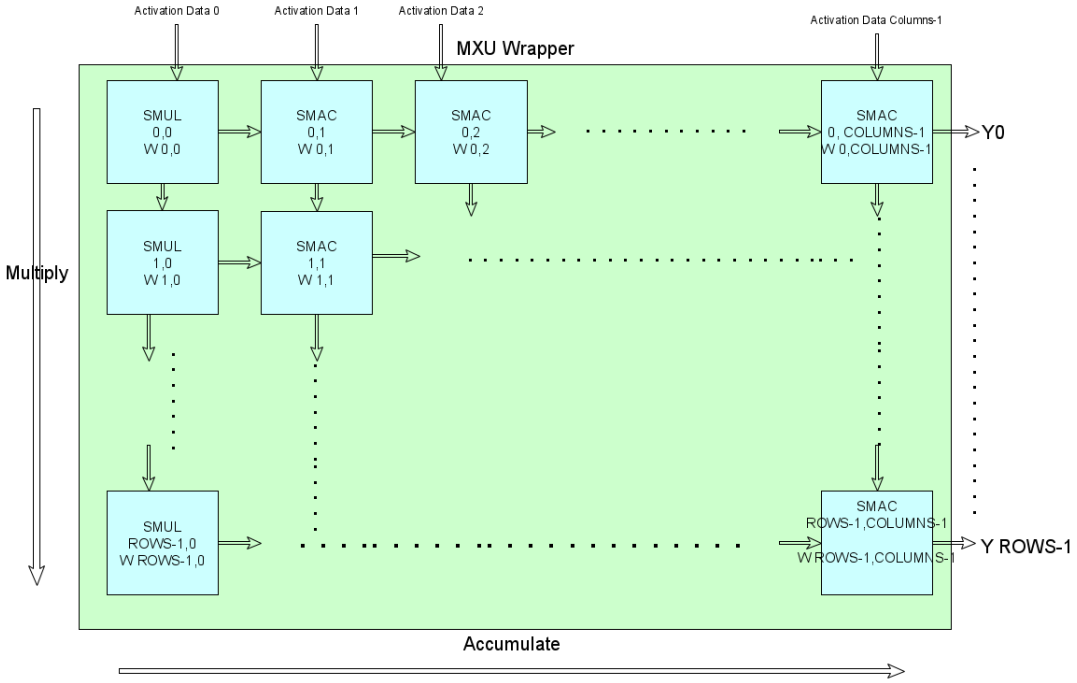

Figure 4.13: MXU interal structure and weights distribution

Every sub units has its own weight value (distributed thanks to the L/S weight combined with Filter&Select units, see Figure 4.11). It is a homogeneous unit, except for the first column, which does not accumulate. In addition, as it can be seen from the block diagram, there is no control flow between every Processing units. There is only data exchange from the previous unit to the next one (for both axis). This matrix configuration of the hardware allows to massive multiply and accumulate at the same time, in particular it can compute:

$$MAC_{OPS} = ROWS * COLUMNS \text{ per } \# \text{ clock cycle required for a single unit}$$
$$\text{with a } Throughput = Rows$$

The MXU can be synthesized with different criteria.
In particular, the Processing Elements can be independently generated for a single data precision, from integer 8/16/32/64 to floating-point 32 or brain floating-point 16, or with some precision at the same time. Then data precision is decided, via software, and properly controlled using signal in Figure 4.14.

A detailed view of SMAC (Sub unit Multiply and Accumulate) and SMUL(Sub unit Multiply), the Processing Elements, is given in Figure 4.14.

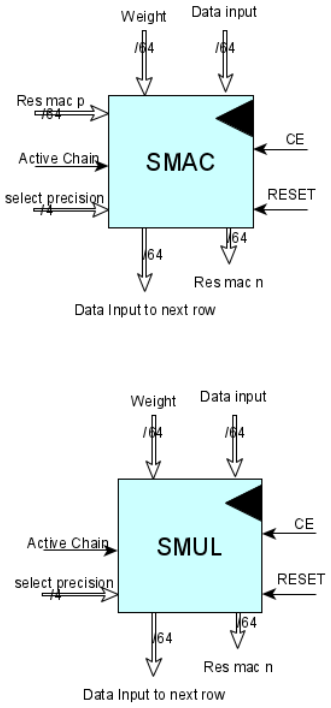

Figure 4.14: SMAC and SMUL details

It is important to mention that the sub units are always receiving data on 64 bits even if internally they may use all of them or not, depending on the value of *select precision* and *active chain* signals. For the full integer configuration (64 bit width operations) beside the possibility of computing for different data width (i.e. choose between 8/16/32/64) the Processing Elements can compute vectorized operations. With the help of *active chain* signal (active low, otherwise it is a 64 bit computation) and data width fixed to 64 bit, it is able to compute at the same time two 8-bit, one 16-bit and one 32-bit operations (multiplication for SMUL and multiplication and addition for SMAC). However, this comes with the overhead of correctly packing and unpacking the data on the CPU before transferring them to the accelerator.

SMAC and SMUL units have been designed, internally, using Vivado DSP primitives [38], which a general schema can be appreciated in Figure 4.15:

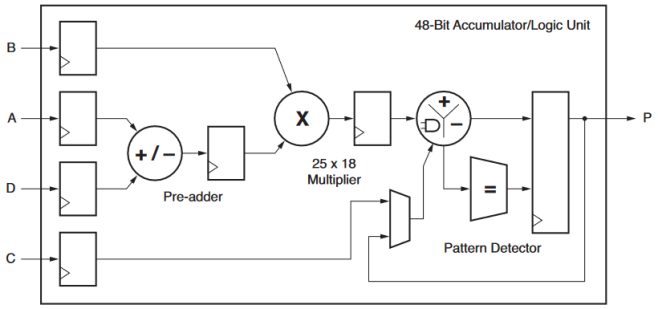

Figure 4.15: DSP Slice Functionality [38]

Allowing fitting two computation (referring to SMAC) in one single unit[8] and maximize the resource utilization.

As soon as the Synthesis process reach the maximum value of DSP utilization, it does not switch automatically to use Fabric for those primitives. For maximizing the resource usage of the FPGA, the DSP primitives have been regenerated for both Fabric and DSP blocks. In this way, during the generation algorithm for the MXU, it uses primitives for DSP up to the maximum allowed value for the given board and then it starts to utilize Fabric. This approach has allowed almost a full utilization of the FPGA resources.

[8]Only for integer 8 and 16

5
Results

If you can not measure something, you can not improve it.
— William Thomson Kelvin

5.1 Evaluation metrics

Generally speaking in Computer Science, every domain and application could have different evaluation metrics, for example the energy efficient of a CPU is a heavy metrics in embedded systems while in a high performant CPU latency and throughput are dominant metrics. As said that, evaluation metrics strongly depend on the end-users, therefore the designers have to make assumption on the end-user intentions and applications.

In this work the assumptions are that the accelerator will be deployed into an embedded system and at the same time it should give to the user a certain degree of flexibility for running Neural Network models. Thus, as it is suggested [5] the following metrics are used:

- Accuracy, quality of the final result of inference process.
- Throughput, for measuring real time performance. It depends on the number of internal computation cores.
- Latency, for interactive applications.
- Energy and Power.
- Hardware cost (Utilization Factor in case of an FPGA) of chip area and process technology.

5.2 Utilization Factor

An important aspect of an embedded system is the on-die utilization area. Those kinds of system are usually deployed on tight area-constrained chips for hiding their presence to the user. Therefore, it is important to measure and understand the behavior on the Utilization of the FPGA (used as area measurement in this case) of the design as the size of Matrix Multiplication Unit increases and in parallel the throughput.

The Utilization Factor, composed of Look-up-Table, Flip Flops and Digital Signal Processor usage, is expected to increase as the size of Multiplication Matrix increase and the bit width of Computation Unit.

In the following Figures, utilization results are presented for each data type, where the Matrix Multiplication Unit sizes are pushed as much as the timing requirements are meet:

- Integer 8 bit:

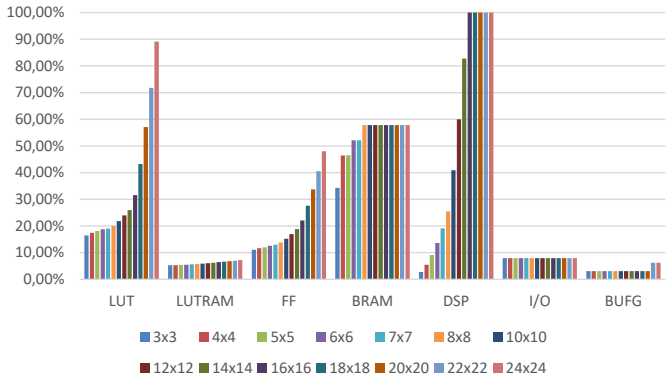

Figure 5.1: Post Implementation Utilization Factor of integer 8 bit PEs and clock frequency of 30 Mhz

- Integer 16 bit:

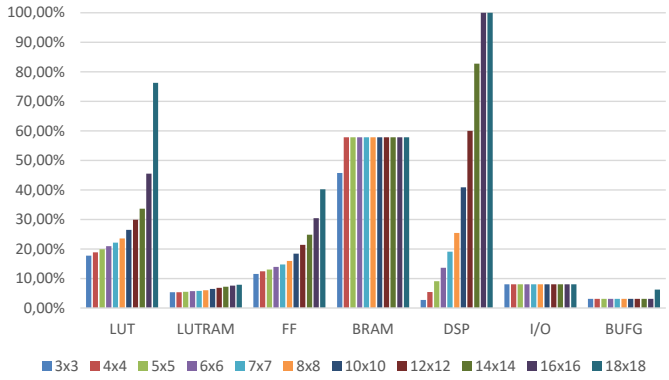

Figure 5.2: Post Implementation Utilization Factor of integer 16 bit PEs and clock frequency of 30 Mhz

- Integer 32 bit:

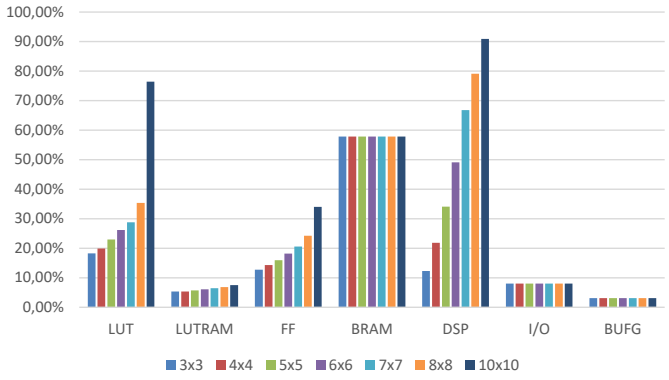

Figure 5.3: Post Implementation Utilization Factor of integer 32 bit PEs and clock frequency of 30 Mhz

- Integer 64 bit:

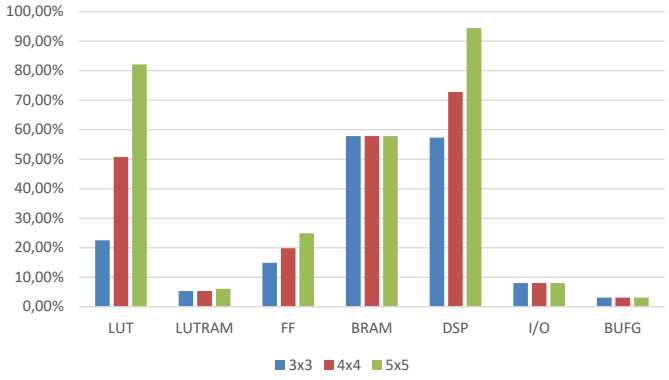

Figure 5.4: Post Implementation Utilization Factor of integer 64 bit PEs and clock frequency of 30 Mhz

- Brain Floating point 16:

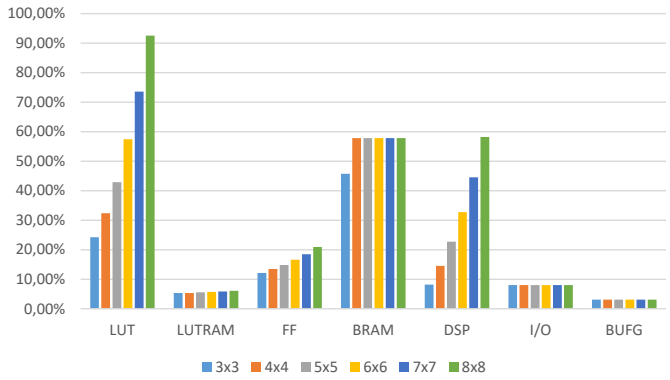

Figure 5.5: Post Implementation Utilization Factor of bfp 16 bit PEs and clock frequency of 30 Mhz

- Floating point 32:

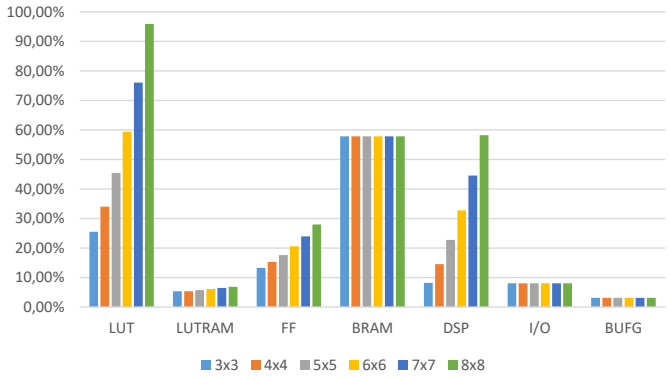

Figure 5.6: Post Implementation Utilization Factor of fp 32 bit PEs and clock frequency of 30 Mhz

It can be seen that the trend for integer 8 and 16 is similar (Figure 5.1 and 5.2). It is a 1 to 1 mapping between the PE and the DSP entity on the board. Actually, the DSP entities are on 16 bit and using the 8 bit units the high 8 bits are gated to zeros.

As soon as the DSP are used the utilization of LUT and FF is linear in the sizes of Matrix Multiplication unit, while the DSP utilization is quadratic. At a full utilization of DSP entities the PEs start to be implemented in logic and it can be seen, in all the previous graphs, a sudden rise in the LUT utilization.
It is also worth to mention that the PEs on 64 bit integer are a special case of FPGA's utilization, they reach sooner than the other designs the full utilization. Every PEs in this configuration is using a 14 DSP entities for taking into account also the possibility of computing vectorized operations as previously mentioned.

Regarding the floating point units, it has been used the same hardware unit for both the fp32 and bfp16, since they have the same exponent bit length but different mantissa length (this also allows to have the same numerical stability). Relying on the synthesis process to properly optimize the different units and discard, where

necessary, the unused hardware. In fact, comparing Figure 5.5 with Figure 5.6, there is a slight different in the utilization of the LUT and a more remarkable difference in FF utilization.

Increasing the clock frequency, the FPGA's utilization is reduced since with an increase of the Matrix Multiplication Unit sizes the design is not able anymore to meet the timing requirements, especially for the floating point units.

5.3 Energy and Power Consumption

Energy and Power consumption are important factor, for a mobile device in which there is a limited battery capacity meanwhile for data centers stringent power ceilings due to cooling costs.

According to the Vivado Power estimation manual[39], the static power is calculated over all the FPGA resources. This is due to the hard estimation of the static power per single design. In the following Figures, estimations of power consumption from Vivado are presented for each data type and different clock frequencies:

- Integer 8: The previous Figures represent the behaviour of the power con-

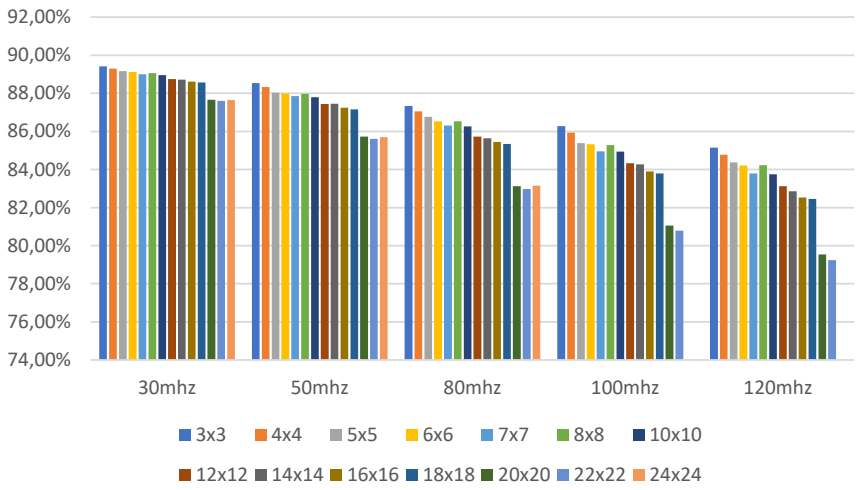

Figure 5.7: Post Implementation Power Consumption of Processing System for integer 8 PEs

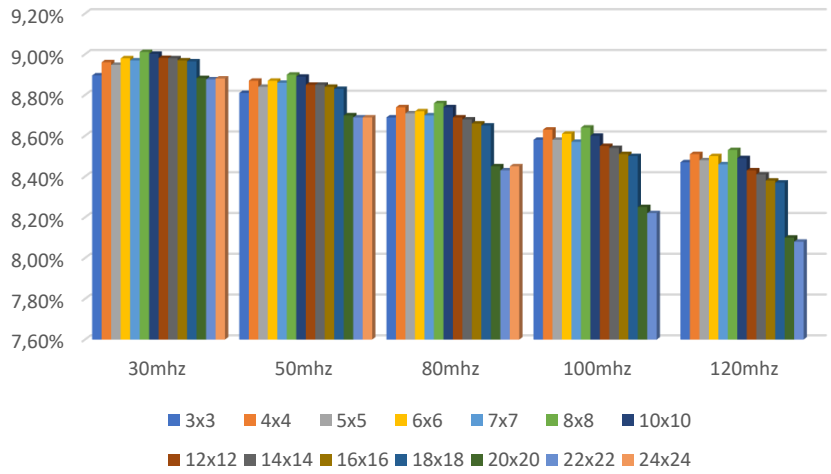

Figure 5.8: Post Implementation Static Power Consumption Programmable logic for integer 8 PEs

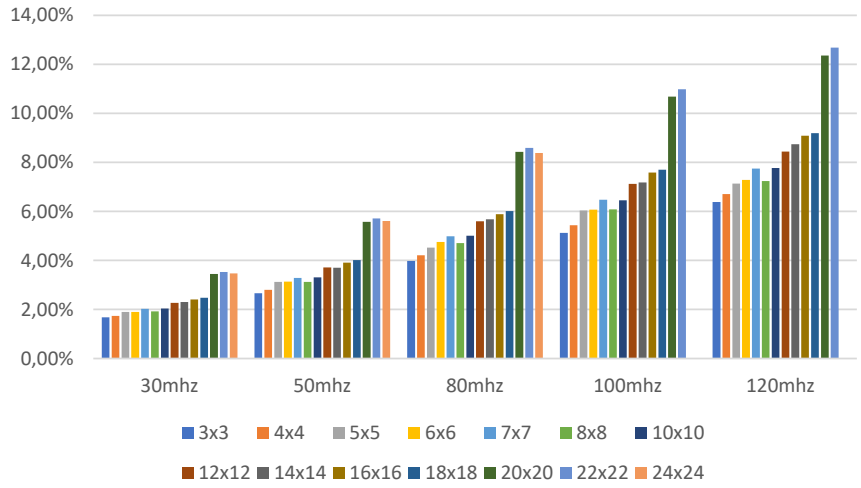

Figure 5.9: Post Implementation Dynamic Power Consumption per Programmable logic with integer 8 PEs

sumption with different Matrix Multiplicatio Unit and for different clock frequency (see Appendix C). It is expressed as percentage with reference to the total power consumption of the SoC (processing system and programmable logic). In fact it can be seen that the power consumption of the processing system and the static power consumption have a less impact on the total power consumption with an increase of the Matrix Multiplication Unit and the frequency. On the other hand, the dynamic power consumption in Figure 5.9, as expected, grows with a growing Matrix Multiplication Unit and the design frequency.

In the following Figures, the dynamic power consumption for each entities (in percentage, wrt the dynamic power in Figure 5.9) in the FPGA is analyzed for different clock frequencies.

As it is very well known, the clock distribution is one of the main source

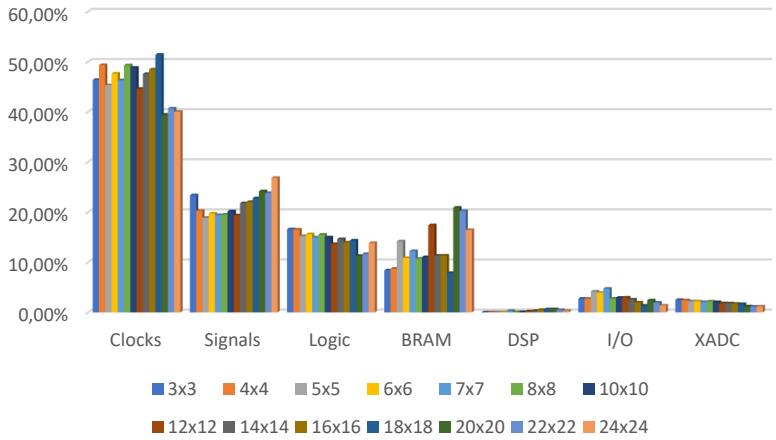

Figure 5.10: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and integer 8 PEs

of power consumption, and it is confirmed from all the previos Figures. Also the interconnections, called *signals* in the figures, are power hungry (a bigger MXU leads to many, and longer, interconnections between PEs). In fact the clock distribution networks and the interconnections are the predominant entities of the dynamic power consumption of the programmable logic. The logic entity is containing all the power consumed by the FFs and LUTs, it looks like their power consumption is decreasing but it is only the percentage of the total dynamic power which is decreasing. It is worth to mention that the PEs (at least the majority of them) are implemented using the DSP entities. However, the power consumed by those entities is almost negligible, the DSPs are low power entities in the FGPA according to its datasheet [32].

Regarding the BRAM, I/O and XADC, with an increase or a decrease of the other entities impact they have a slightly modification of their impact on the power consumption.

- Integer 16:
  In the follwing Figures, the same considerations for the Integer 8 are still valid since the PEs are always implemented on the same DSP entity but without the higher 8 bits of the input values gated to zeros.

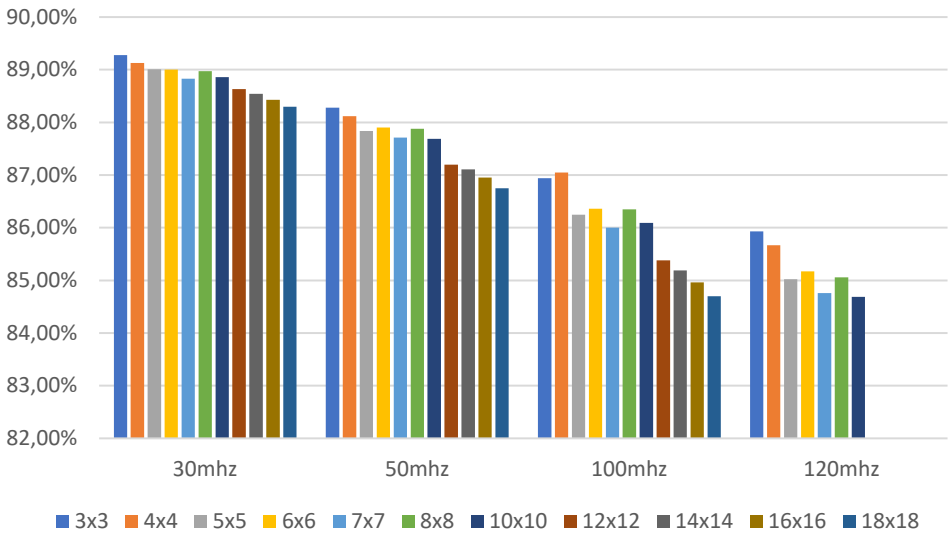

Figure 5.11: Post Implementation Power Consumption of Processing System for integer 16 PEs

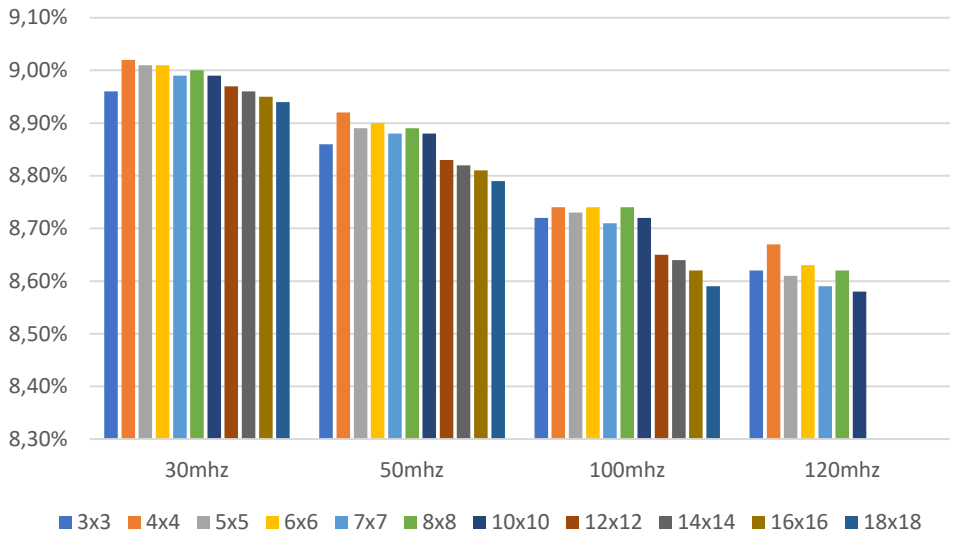

Figure 5.12: Post Implementation Static Power Consumption Programmable logic for integer 16 PEs

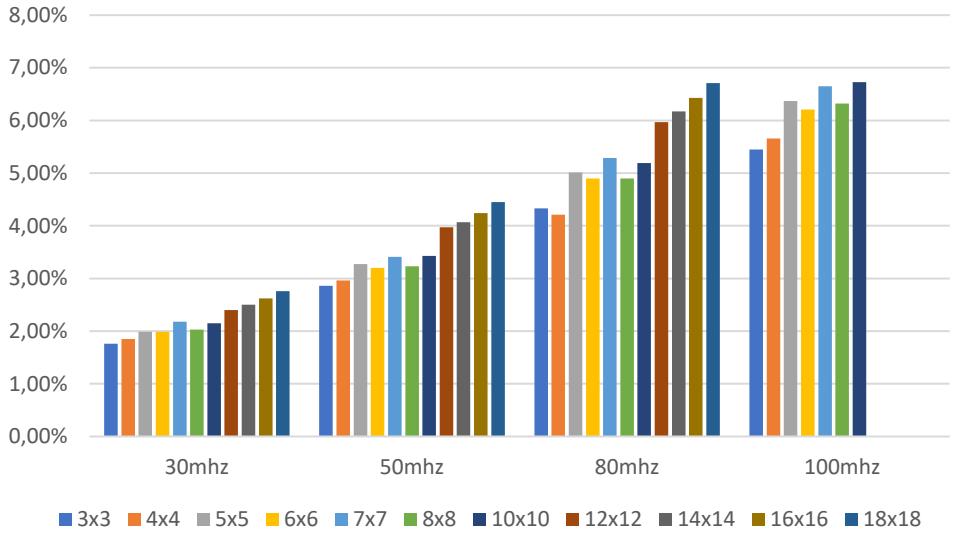

Figure 5.13: Post Implementation Dynamic Power Consumption per Programmable logic with integer 16 PEs

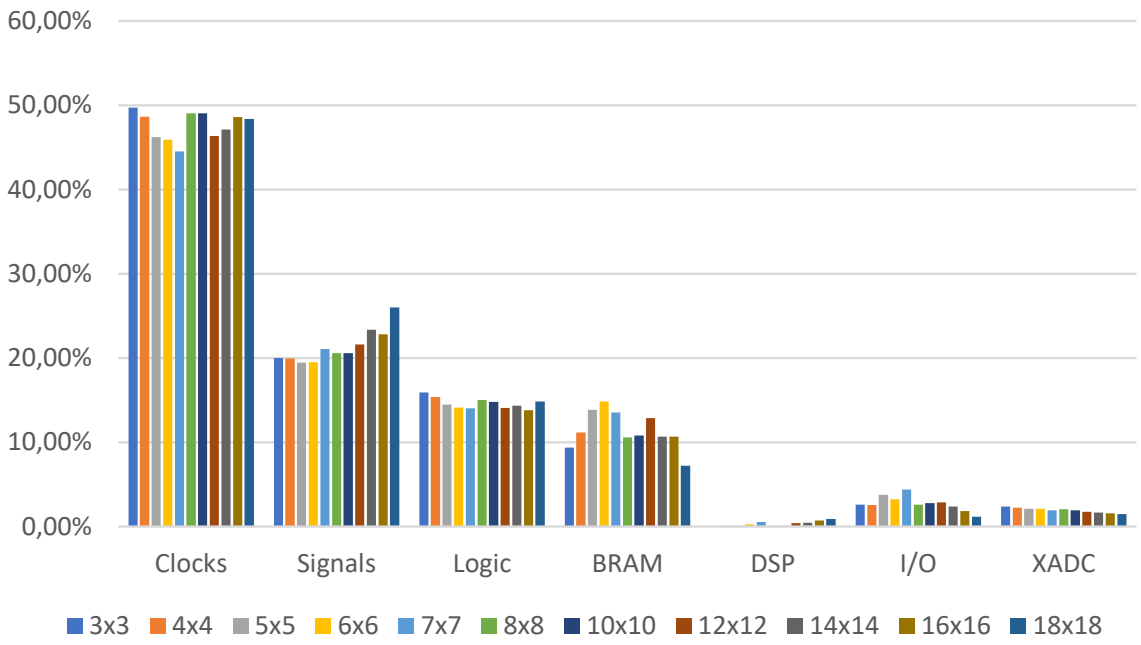

Figure 5.14: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and integer 16 PEs

- Integer 32:
  From now on, the MXU sizes and the frequencies will show a reduction in their values, this is manly because big designs (with almost full FPGA's utilization) are not able to meet anymore the timing requirements.

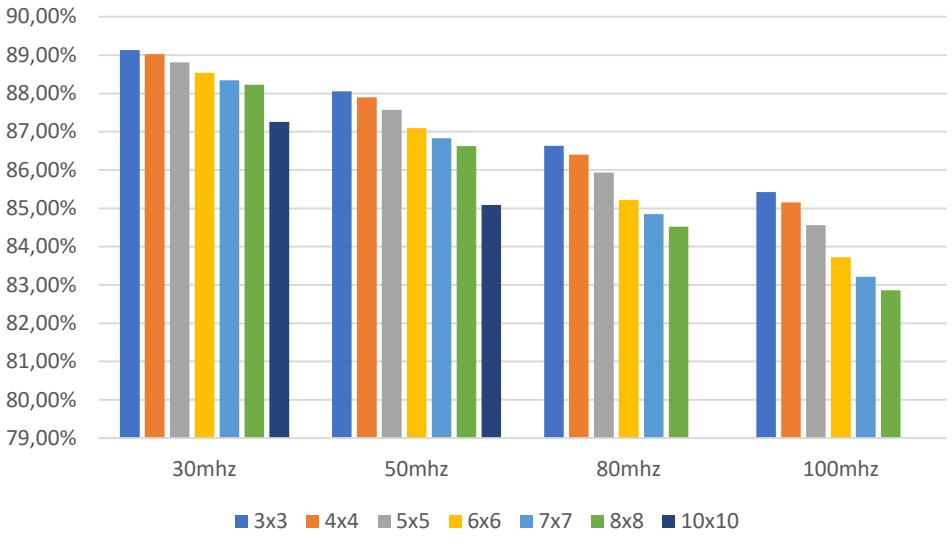

Figure 5.15: Post Implementation Power Consumption of Processing System for integer 32 PEs

It is worth to mention the power consumed by the DSP entities, comparing to integer 8 and 16 PEs, is bigger. The main reason is that there is no more one to one mapping between PEs and DSP entities.

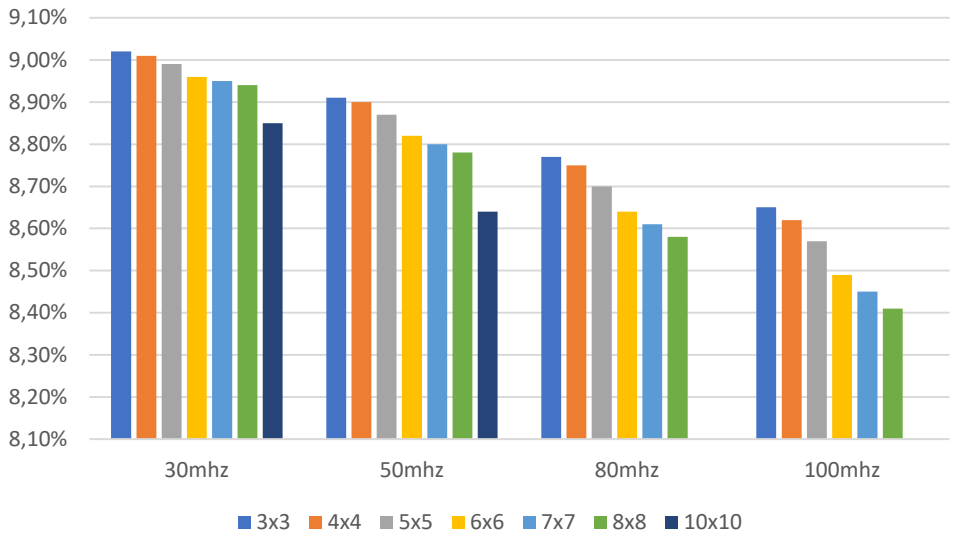

Figure 5.16: Post Implementation Static Power Consumption Programmable logic for integer 32 PEs

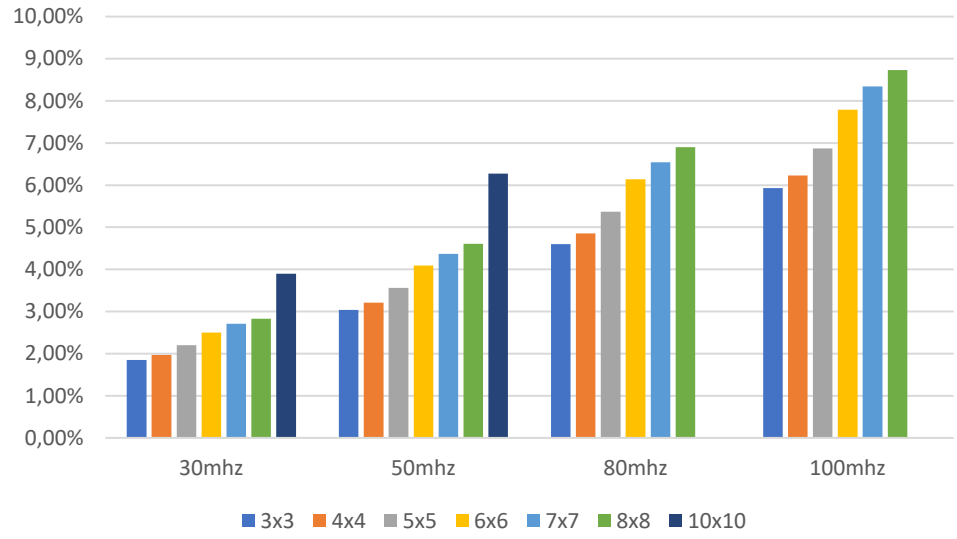

Figure 5.17: Post Implementation Dynamic Power Consumption per Programmable logic with integer 32 PEs

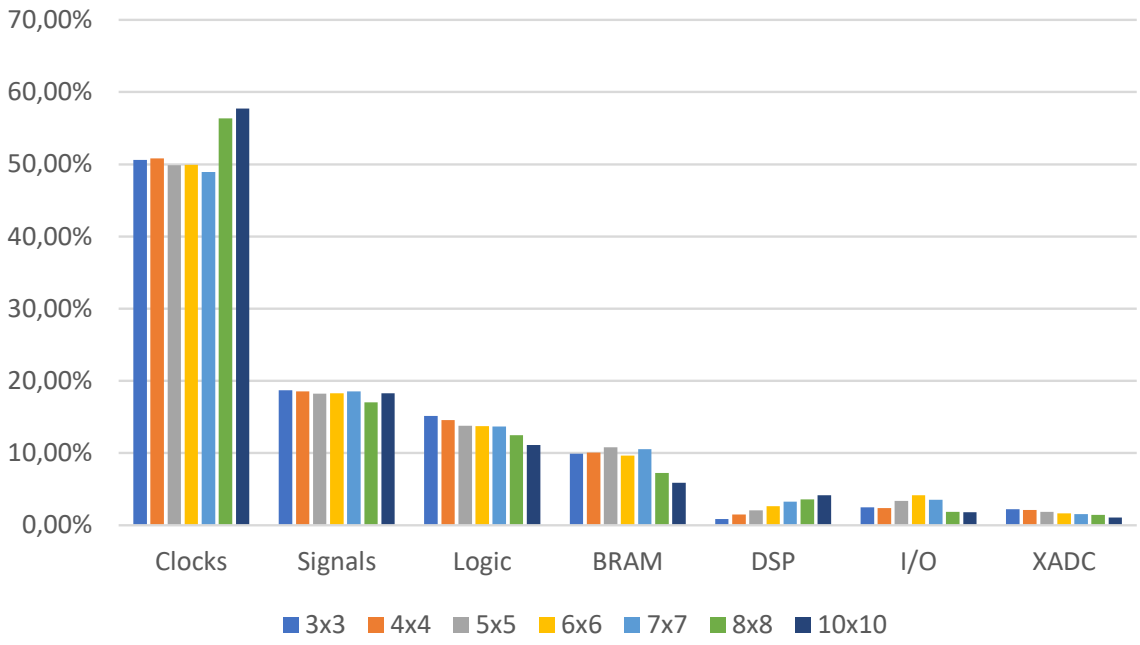

Figure 5.18: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and integer 32 PEs

- Integer 64:

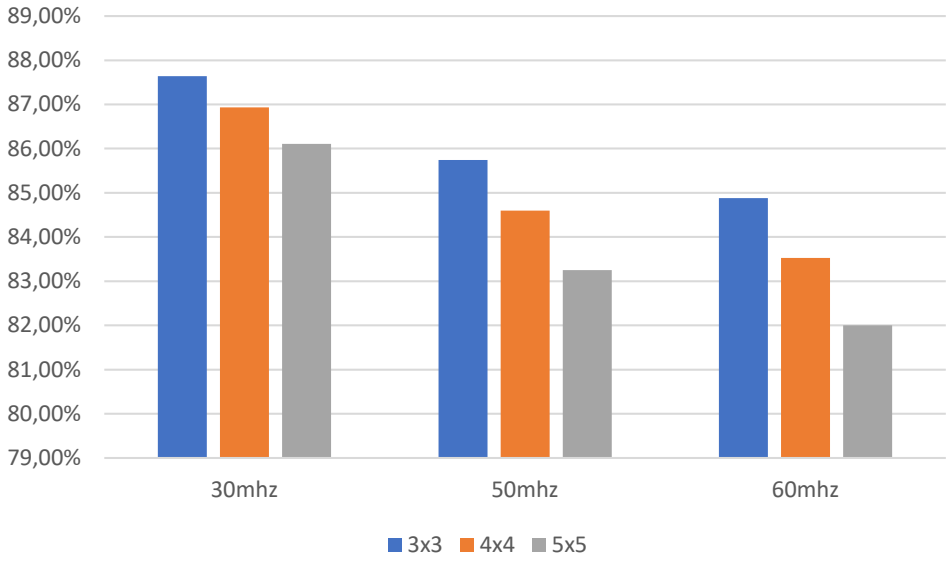

Figure 5.19: Post Implementation Power Consumption of Processing System for integer 64 PEs

As mentioned in the Utilization chapter, the PEs on 64 bit integer are using 14 DSP entities (for having the possibility to compute vectorized operations on data). Therefore, this heavy utilization per PEs is impacting also the power consumed by the DSPs but as it can be seen in Figures.

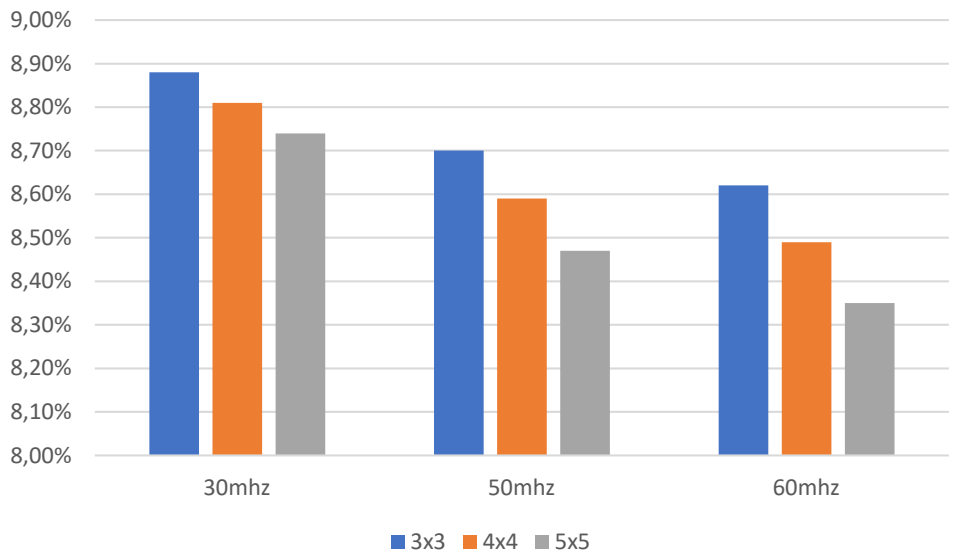

Figure 5.20: Post Implementation Static Power Consumption Programmable logic for integer 64 PEs

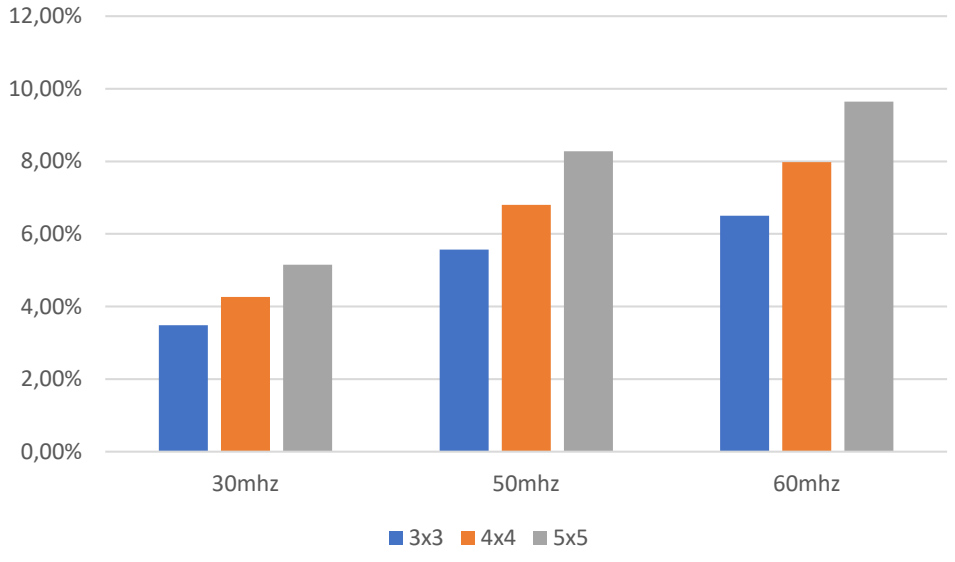

Figure 5.21: Post Implementation Dynamic Power Consumption per Programmable logic with integer 64 PEs

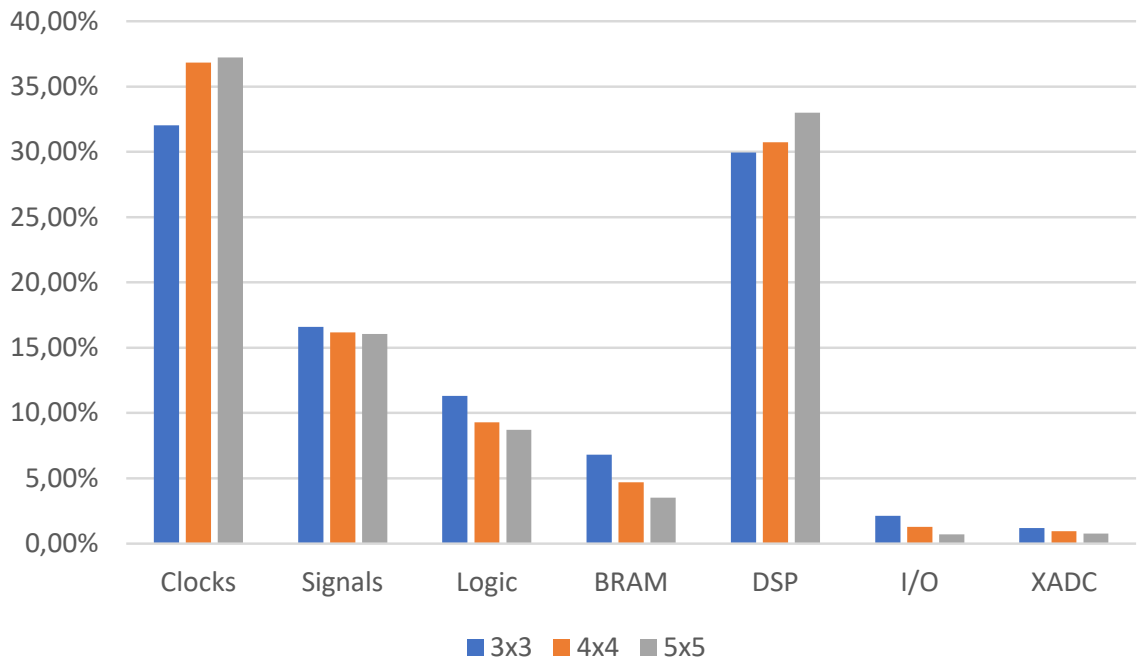

Figure 5.22: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and integer 64 PEs

- Brain floating point 16:

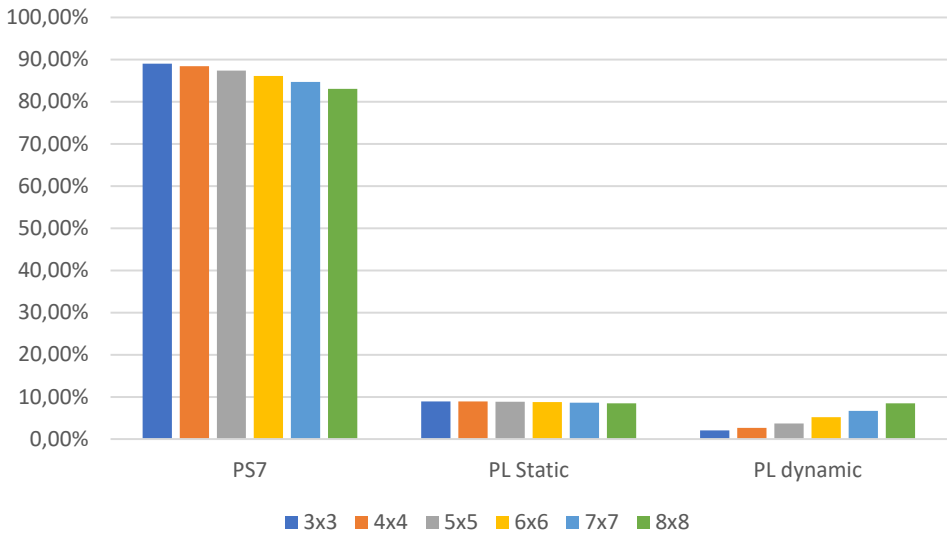

Figure 5.23: Post Implementation Power Consumption for bfp16 PEs

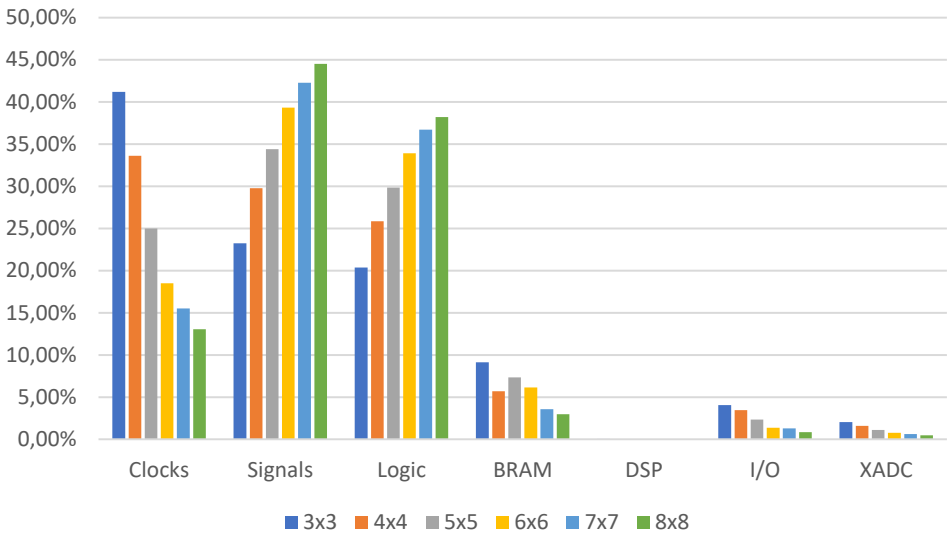

Figure 5.24: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and bfp16 PEs

- Floating point 32:

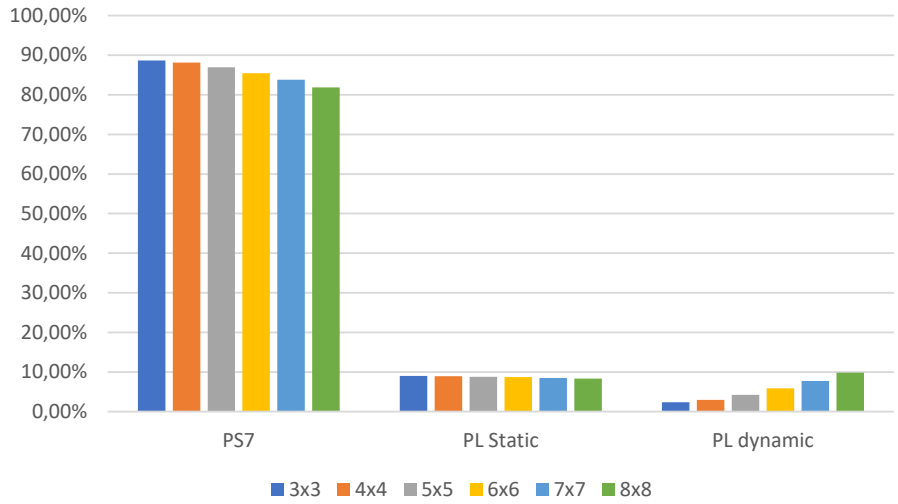

Figure 5.25: Post Implementation Power Consumption for fp32 PEs

For the bfp16 and fp32 it can be seen that the majority of the power is consumed by the interconnections and the logic. Mainly, because the PEs are implemented in logic.

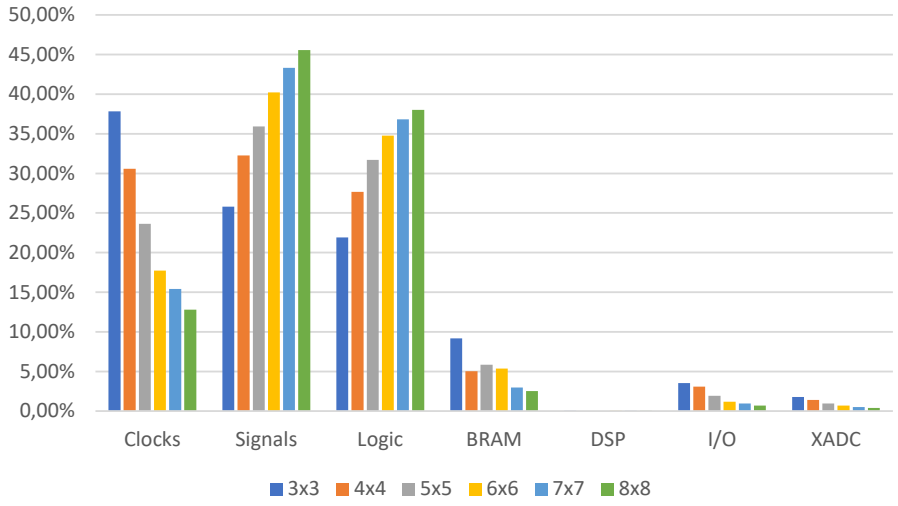

Figure 5.26: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and fp32 PEs

Until now, the focus has been on how much the single entities and the different type of power were impacting the total power consumption. It is also worth to compare the absolute values for different data precision, as in the Figure 5.27. As it is very

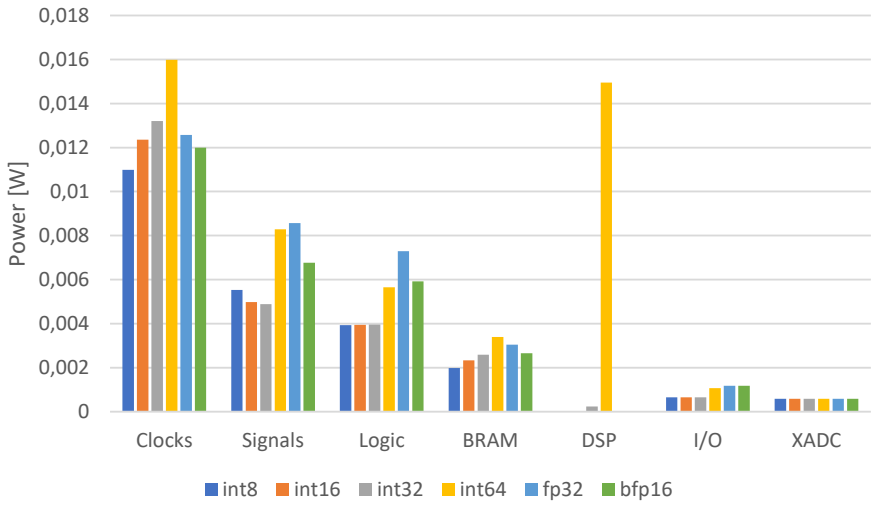

Figure 5.27: Comparison of Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 30 MHz and a MXU 3x3

well known from literature and it has also been evident from the other figures and observations, the power consumption per entities grows with the increase of the bitwidth (in the case of integer) and complexity (in the case of floating point).
The power consumed by the DSPs (entities in which the integer PEs are implemented in) is negligible for the integer 8 and 16 while it starts to grow slowly using the integer 32 but it explodes with the 64 bit PEs. The high utilization of those PEs leads also to a huge impact in their power consumption.

5.4 Throughput

According to the definition, the Throughput is the amount of units of information a system can process in a given time. As said that, for the designed accelerator, it results to be equal to the number of rows into the Matrix Multiplication Unit. Normalizing this value with the clock frequency, it results to be constant for all the data type and frequencies.

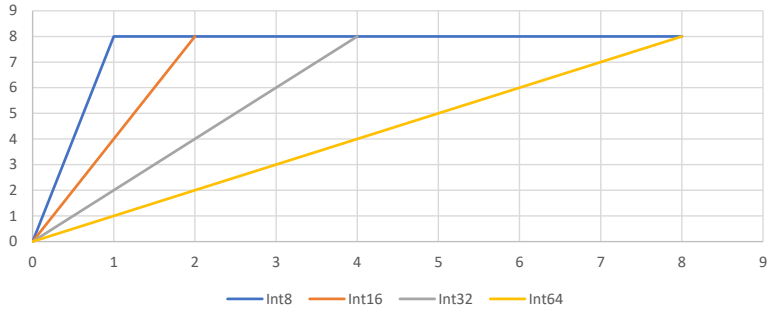

Figure 5.28: Roofline model of the accelerator with a MXU size of 8x8

The theoretical throughput given by the roofline model (Figure 5.28) and it is equal to the number of rows in the matrix multiplication unit. The assumption is that enough data are provided to the accelerator in order to have all the Processing Elements working with useful data, if the latter is not meet the throughput goes down. In Figure 5.28 the different slopes for different data width are representing the different number of internal memory accessess in order to retrieve data for all the Processing Elements.

The throughput can be further increased in the 64-bitwidth configuration of the Processing Elements. As already mentioned, those 64-bit units are able to compute vectorized instructions and therefore increase the number of computation per cycle. However, this comes with the overhead of more memory accesses as it can be appreciated in Figure 5.29.

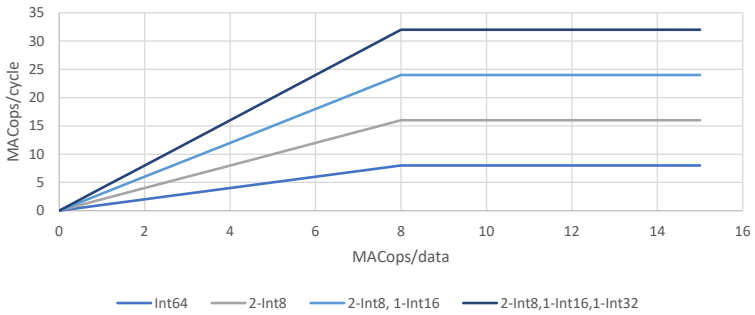

Figure 5.29: Roofline model of the accelerator with a MXU size of 8x8 and vectorized PEs

5.5 Latency

In a real time application, the most important factor is the latency, the execution time of a task. In this case the latency is measured as average of the execution time of a Neural Network model for different platforms. In addition, the execution of the models, on the target, in the configuration *CPU+accelerator* is done with different clock frequencies and data type in the Programmable Logic, and as consequence a different overall latency (and power consumption).

In the following tables, the execution type for different data type and model is presented (with a fixed clock frequency of the accelerator at 50 MHz).

Model	CPU (host)[1]	GPU(host)[2]	CPU(Pynq Z2 board)[3]	CPU(Pynq Z2 board) + accelerator
MNIST	0.3 ms	5.7 ms	2.9 ms	509 ms
Cifar 10	20 ms	22 ms	160 ms	13356 ms

Table 5.1: Execution Time for different platform and model, integer 8

Model	CPU (host)[1]	GPU(host)[2]	CPU(Pynq Z2 board)[3]	CPU(Pynq Z2 board) + accelerator
MNIST	0.3 ms	5.7 ms	2.9 ms	503 ms
Cifar 10	20 ms	22 ms	160 ms	13178 ms

Table 5.2: Execution Time for different platform and model, integer 16

Model	CPU (host)[1]	GPU(host)[2]	CPU(Pynq Z2 board)[3]	CPU(Pynq Z2 board) + accelerator
MNIST	0.3 ms	5.7 ms	2.9 ms	496.9 ms
Cifar 10	20 ms	22 ms	160 ms	13218 ms

Table 5.3: Execution Time for different platform and model, integer 32

Looking at the previous tables, the latency for different data precision it is not changing. This is due to the hardware structure, the Matrix Multiplication Unit is build in such a way that the latency between the one operation and the next one is

[1]Intel i7-6700HQ, 2.60 Ghz
[2]NVIDIA, GeForce GTX960M, 1.176 Ghz
[3]Arm dual-core Cortex-A9, 650 MHz

always of 3 clock cycles (for integer operations).

It is worth to analyze and reason about the increase in the latency in the configuration with the accelerator, since one of the main goal was to reduce the latency. Focusing on the following Figure:

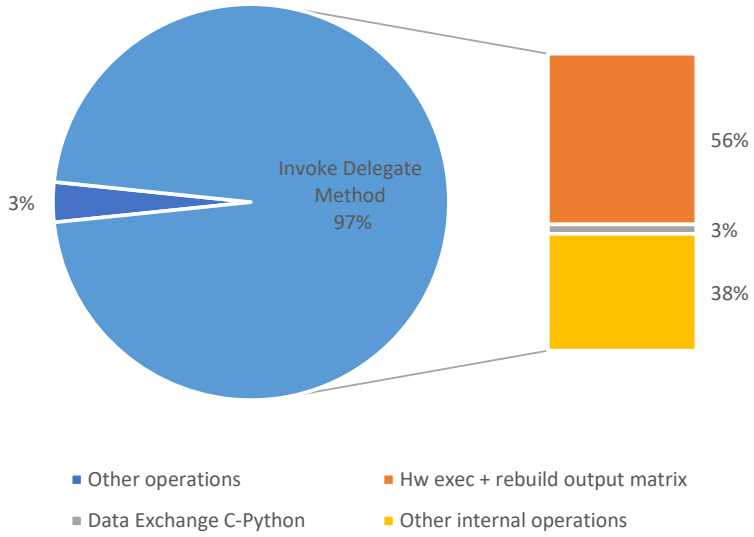

Figure 5.30: Total Execution time of Invoke method (left) in the configuration with accelerator and MNIST model

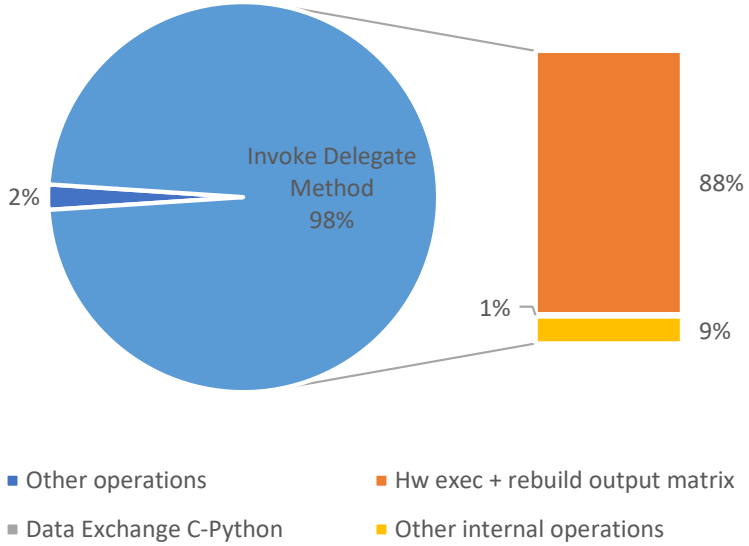

Figure 5.31: Total Execution time of Invoke method (left) in the configuration with accelerator and Cifar10 model

As it has been mentioned before, the most compute intensive part is always the Convolution operations. Introducing the hardware accelerator and its library comes with several overheads as it can be seen in Figures 5.30 and 5.31:

- Data exchange between C and python: the accelerator library has been developed in Python code with the C interface to Tensorflow Lite. This means that every matrix (input, output and weight) is copied to the python sublayer for further processing. Migrating all the accelerator library into C code will remove this overhead.
- Rebuilding of output matrix: After every execution of the computation by the accelerator it is parsing the accelerator's output and rebuilding the output matrix accordingly to the current execution indexes. It can be removed preprocessing the model before the deployment, transforming the matrices in a suitable format for the accelerator as most of on the market accelerators do.
- Hardware execution time (and data transfer to the accelerator): This is the actual execution time of the hardware and the data transfer from/to the accelerator. It is also bounded by the fixed internal memory access. It can be reduced by increasing the frequency of Programmable Logic.
- Other internal operations: it includes the time for reshaping the input matrix in a format suitable for the accelerator and the save back from python to C of the output matrix. It can be removed preprocessing the model before the deployment, transforming the matrices in a suitable format for the accelerator. Moreover, the migration towards a complete C implementation is going to remove the overhead due to the saving back of the output matrix.

Taking into account all the previous details and suggestions, the latency of the model can be pushed down to the latency in the solo-CPU execution with the benefits of less power consumption and CPU overload.

Moreover, it is also important to mention another reason for the latency overheads. This work is based on accelerating ML execution, by solo-accelerating predefined operations of TensorFlow (the most compute intensive ones). All the previous overheads has been the results of this approach, because inside the TensorFlow accelerated functions another software, hardware and data transfer layers have been added. This is slight in contrast with the approaches analyzed during the State-of-the-art chapter, where the entire (preprocessed) model is loaded on the accelerator one and then only the prediction is sent to the CPU.

5.6 Accuracy

The accuracy of inference process in Machine Learning model is how much the prediction is close to the actual value. For example, using the MNIST model, how much is accurate the predicion of a number giving the number as input to the Neural Network.

In the following case, the accuracy for different data width and model will be presented with reference to the actual value, in this case the inference without the hardware accelerator. Moreover, the data provided to the accelerator are bounded by the filter size of the weight, which is always fixed to 3x3 for the used models. Therefore, the MXU for the following comparison has been the standard one, the 8x8.

Model	$\leq \pm 5\%$	$\pm 5\% \div 25\%$	$\pm 25\% \div 50\%$	$\pm 50\% \div 75\%$	$\geq \pm 75\%$
MNIST			x		
Cifar 10					x

Table 5.4: Accuracy Output[1] with Convolution on integer 8

Model	$\leq \pm 5\%$	$\pm 5\% \div 25\%$	$\pm 25\% \div 50\%$	$\pm 50\% \div 75\%$	$\geq \pm 75\%$
MNIST				x	
Cifar 10				x	

Table 5.5: Accuracy Output[1] with Convolution on integer 16

Model	$\leq \pm 5\%$	$\pm 5\% \div 25\%$	$\pm 25\% \div 50\%$	$\pm 50\% \div 75\%$	$\geq \pm 75\%$
MNIST				x	
Cifar 10					x

Table 5.6: Accuracy Output[1] with Convolution on integer 32

It comes suddenly evident that the output prediction with the accelerator integrated varies of a huge amount from the expected one.

One of the reason of the wrong prediction may reside in the input data feed to the model, they are totally random. Being feed with random, and probably unreasonable, data the prediction accuracy has been degradeted.

[1]The accuracy is measured percentage(wrt the reference accuracy) of the difference between the reference accuracy (the model's output on the CPU only execution) and the output accuracy of the CPU+ hardware accelerator of the main predicion, the higher one.

Another improvement from the hardware point of view, which could improve the output accuracy, should be to accumulate on the different bitwidth precision, for example compute multiplication on 8 bits integer and accumulate values on 16 bit integer. Moreover, as in every software product, bugs have not been detected but this does not means that the written software is bug-free.

6
Conclusion

6.1 Discussion

A big portion of inference process for Neural Networks involves massive multiply and add computation, basic operation of tensor convolutions, and across several execution data, especially weight tensors, are reused.

As consequence, for speeding-up and reduce the power consumption (especially in mobile devices) of ML models an hardware accelerator has been developed. It is also designed for accommodating different data type computation request from Neural Network models, ranging from integer8/16/32/64 to floating-point 32 and brain floating-point 16.

The approach of the work has been a hardware/software co-design in order to accommodate the high compute intensive request of Machine Learning, the tensor convolution. Therefore, the hardware core for tensor convolution has been developed from scratch, while the common components, such as memories and bus interface, have been chosen from the available ones in the tools.

Moving one step at the time above in the abstraction level, the accelerator library has been developed and deployed. In order to accomplish it in a fixed time, the core of the library has been developed in Python, which has been interfaced with a C-code template provided from the developers of thee ML-framework used. This has lead to a hybrid library which encapsulates a frozen Python code layer, called from the C-code, the latter is only in charge of retrieving the data and passing them to the Python layer.

Again moving one step above in the abstraction, the ML-framework level is reached. In this level, the most popular ML-framework, TensorFlow, has been chosen. It also offers the possibility of delegate part of the execution graph to coprocessor or GPUs. Moreover, existing Tensorflow pretrained models have been quantized for different bitwidth and data precision.

It is possible to build a custom hardware accelerator for a specific ML operation and then integrate it into a framework without changing the model nor the framework.

The bottom up approach and the delegate class available in Tensorflow has allowed to fully tailor a new class of hardware accelerators which can accommodate different needs (i.e. depending on which part of the model has to be accelerated). As it has been organized, changing the core software in the Python code and the core in the hardware, it can be also used for addressing different model's operations.

6.2 Future Works

For every human artifacts, there is always work to do. In addition, for Computer Engineering artifacts there is also an important step which is the software (and in this case also of the hardware) optimization. In particular:

- Software Optimization and migration to a full C code implementation for further reducing the latency.
- A deep software/hardware testing for finding additional bugs.
- Power estimation using the simulation's switching activity in order to obtain a very precise and reliable power consumption.
- Comparison of model execution on different state-of-the-art platforms.

Following the previous recommendation, the work may arrive to a competitive level such as the one of the GPUs or other hardware platforms.

Bibliography

[1] N. P. Jouppi, C. Young, N. Patil, D. A. Patterson, et all, "In-Datacenter Performance Analysis of a Tensor Processing Unit", *CoRR* **2017**, *abs/1704.04760*.

[2] Nvidia, NVDLA, `http://nvdla.org/index.html#`.

[3] Habana, "Gaudi™ Training PlatformWhite Paper", **2019**.

[4] Habana, "Goya™ Inference Platform White Paper", **2019**.

[5] V. Sze, Y. H. Chen, T. Yang, J. S. Emer, "Efficient Processing of Deep Neural Networks: A Tutorial and Survey", *IEEE vol. 105 no. 12 pp. 2295-2329* **Dec. 2017**.

[6] N. P. Jouppi, C. Young, N. Patil, D. Patterson, "A domain-specific architecture for deep neural networks", *ACM 61 pag. 50-59* **August 2018**.

[7] Y. Cai, C. Liang, Z. Tang, H. Li, S. Gong, "Deep Neural Network with Limited Numerical Precision", **2018**, (Eds.: J. Abawajy, K.-K. R. Choo, R. Islam), 42–50.

[8] J. Johnson, "Rethinking floating point for deep learning", *Facebook AI Research* **2018**.

[9] A. Rahman, S. Oh, J. Lee, K. Choi, "Design space exploration of FPGA accelerators for convolutional neural networks", **1996**.

[10] J. T. Johnston, S. R. Young, C. D. Schuman, J. Chae, D. D. March, R. M. Patton, T. E. Potok, "Fine-Grained Exploitation of Mixed Precision for Faster CNN Training", **2019**, 9–18.

[11] H. J. L. Hao Zhang, S.-B. Ko, "Efficient Fixed/Floating-Point Merged Mixed-Precision Multiply-Accumulate Unit for Deep Learning Processors", **2018**.

[12] A. Turing, "Computing machinery and intelligence", *Mind* **1950**.

[13] S. Russell, P. Norvig, *Artificial intelligence : a modern approach.* Pearson Education Limited, **2016**.

[14] W. Maass, "Networks of spiking neurons: The third generation of neural network models", *Neural Networks* **1997**, *10*, 1659 –1671.

[15] A. Tavanaei, M. Ghodrati, S. R. Kheradpisheh, T. Masquelier, A. Maida, "Deep learning in spiking neural networks", *Neural Networks* **2019**, *111*, 47 –63.

[16] A. Amir, B. Taba, D. Berg, T. Melano, J. McKinstry, C. D. Nolfo, T. Nayak, A. Andreopoulos, G. Garreau, M. Mendoza, J. Kusnitz, M. Debole, S. Esser, T. Delbruck, M. Flickner, D. Modha, "A Low Power, Fully Event-Based Gesture Recognition System", *IBM research* **2017**.

[17] R. Zhao, Y. Hu, J. Dotzel, C. D. Sa, Z. Zhang, "Improving Neural Network Quantization without Retraining using Outlier Channel Splitting", **2019**.

[18] R. Banner, Y. Nahshan, D. Soudry, “Post training 4-bit quantization of convolutionalnetworks for rapid-deploymen”, **2019**.
[19] S. Zhou, Y. Wu, Z. Ni, X. Zhou, H. Wen, Y. Zou, “DoReFa-Net: Training Low Bitwidth Convolutional Neural Networks with Low Bitwidth Gradients”, **2018**.
[20] Chien-Ping Lu in Proceedings of 2010 International Symposium on VLSI Design, Automation and Test, **2010**, pp. 5–5.
[21] Nvidia, “NVIDIA A100 Tensor Core GPU Architecture, Unprecedent acceleration at every scale”, **2020**.
[22] Nvidia, NVDLA Hardware Architectural Specification, `http://nvdla.org/hw/v1/hwarch.html`.
[23] Arm, “AMBA® AXI™ and ACE™ ProtocolSpecification”, **2011**.
[24] Nvidia, NVDLA Software Manual, `http://nvdla.org/sw/contents.html`.
[25] Google, An in-depth look at Google’s first Tensor Processing Unit (TPU), `https://cloud.google.com/blog/products/gcp/an-in-depth-look-at-googles-first-tensor-processing-unit-tpu`.
[26] TensorFlow, `https://www.tensorflow.org/overview`.
[27] Xilinx, “Zynq-7000 SoC, Technical Reference Manual”, **2018**.
[28] Xilinx, PYNQ, `http://www.pynq.io/board`.
[29] G. Corradi, “The value of Python Productivity: exteme edge analytics on Xilinx zynq portfolio”, *Xilinx* **2018**.
[30] TensorFlow Hub, `https://www.tensorflow.org/hub/overview`.
[31] C Foreign Function Interface for Python, `https://cffi.readthedocs.io/en/latest/`.
[32] Xilinx, “Zynq-7000 SoC Data Sheet: Overview”, **2018**.
[33] Xilinx, “AXI Interconnect v2.1LogiCORE IP Product Guide”, **2017**.
[34] Xilinx, “Vivado Design Suite, AXI Reference Guide”, **2017**.
[35] Xilinx, “AXI DMA v7.1LogiCORE IP Product Guide”, **2019**.
[36] Xilinx, “7 Series FPGAs and Zynq-7000 SoC XADC Dual 12-Bit 1 MSPS Analog-to-Digital Converter , User Guide”, **2018**.
[37] Xilinx, “AXI4-Stream Accelerator Adapter v2.1LogiCORE IP Product Guide”, **2015**.
[38] Xilinx, “7 Series DSP48E1 Slice,User Guide”, **2018**.
[39] Xilinx, “Vivado Design Suite UserGuide: Power Analysis andOptimization”, **2020**.

A

Accelerator library

Script for creating library:

```
import cffi
import sys
sys.path.append('/usr/local/lib')

#
    ##############################################################################

####           The Frankenstein, a mix of C and Python
    ######
####  create .so library from PYNQ python code for DTPU accelerator
    ######
####         on board compiling, it requires
    ######
####   to have tensorflow/tensorflow/lite in /usr/include/pythonX.X
    ######
####                    from r2.1 branch
    ######
#
    ##############################################################################

ffibuilder = cffi.FFI()

ffibuilder.cdef("""
extern "Python" {
bool destroy_p(void  );
bool CopyFromBufferHandle_p(void);
bool CopyToBufferHandle_p(void);
void FreeBufferHandle_p(void);
bool SelectDataTypeComputation_p(int);
bool Init_p(int ,int,int);
bool Prepare_p(int);
bool Invoke_p(bool,int);
void  load_overlay(void);
bool ResetHardware_p(void);
void push_weight_to_heap( void  *,int *,int);
void push_input_tensor_to_heap( void  *,int *,int);
void push_output_tensor_to_heap( void  *,int *,int);
bool print_power_consumption_p(void);
bool start_power_consumption(void);
void activate_time_probe_p ( bool);
bool print_python_time_probes(void);
 };
  void * tflite_plugin_create_delegate();
```

```
35    void tflite_plugin_destroy_delegate(void * ,void * );
36    bool  SelectDataTypeComputation(int);
37    bool print_power_consumption();
38    bool measure_power_consumption();
39    bool print_execution_stats();
40    bool activate_time_probe(bool );""")
41
42
43 cpp_file=open("./DTPU_delegate.cpp","r")
44 ffibuilder.set_source("dtpu_lib", cpp_file.read(),source_extension=".
     cpp",
45   extra_compile_args=['-Wno-unused-result', '-Wsign-compare', '-DNDEBUG
     ', '-g', '-fwrapv', '-O2', '-Wall', '-Wstrict-prototypes',
46   '-g', '-fdebug-prefix-map=/build/python3.5.2=.', '-specs=/usr/share/
     dpkg/no-pie-compile.specs', '-fstack-protector-strong',
47   '-Wformat', '-Werror=format-security','-I/usr/local/include','-L/usr/
     local/lib'],
48   extra_link_args=['-Wl,-Bsymbolic-functions','-specs=/usr/share/dpkg/
     no-pie-link.specs',
49   '-Wl,-z,relro','-specs=/usr/share/dpkg/no-pie-compile.specs','-
     D_FORTIFY_SOURCE=2','-fPIC'] ,
50   libraries=['pthread','expat','z','dl','util','m','tensorflow'])
51 #if you want to simply access a global variable you just use its name.
52 # However to change its value you need to use the global keyword.
53 python_file=open("./DTPU_delegate.py","r")
54 ffibuilder.embedding_init_code(python_file.read())
55
56 ffibuilder.compile(target="DTPU_delegate.*", verbose=True)
57
58 cpp_file.close()
59 python_file.close()
```

C++ code of the library:

```
/// release dependent libraries tensorflow r2.1
#include <tensorflow/lite/c/builtin_op_data.h>
#include <tensorflow/lite/c/c_api_internal.h>
#include <tensorflow/lite/builtin_ops.h>
#include <tensorflow/lite/context_util.h>
#include <tensorflow/c/c_api.h>
#include <vector>
#include <time.h>
#define DEBUG 1

static bool destroy_p(void );
static bool CopyFromBufferHandle_p(void);
static bool CopyToBufferHandle_p(void);
static void FreeBufferHandle_p(void);
static bool SelectDataTypeComputation_p(int);
static bool Init_p(int,int,int );
static bool Prepare_p(int );
static bool Invoke_p(bool,int);
static void load_overlay(void);
static bool ResetHardware_p(void);
static void push_weight_to_heap( void  *,int *,int);
static void push_input_tensor_to_heap( void  *,int *,int);
static void push_output_tensor_to_heap( void  *,int *,int);
static bool print_power_consumption_p(void);
static bool start_power_consumption(void);
static void activate_time_probe_p (bool);
static bool print_python_time_probes(void);


/*
possible operations
  kTfLiteBuiltinAdd = 0,
  kTfLiteBuiltinConcatenation = 2,
  kTfLiteBuiltinConv2d = 3,
  kTfLiteBuiltinDepthwiseConv2d = 4,
  kTfLiteBuiltinDepthToSpace = 5,
  kTfLiteBuiltinFullyConnected = 9,
  kTfLiteBuiltinMul = 18,
  kTfLiteBuiltinSub = 41,
  kTfLiteBuiltinDelegate = 51,
  kTfLiteBuiltinAddN = 106,struct timespec ts_start,ts_end;
*/


int bit_width_computation;
int NO_FP=-1;
bool signed_computation=false;
bool only_con2d=false;
```

```
49
50 // time probes
51 bool time_probe=false;
52 int n_execution=0;
53 double avg_time_delegate;
54 double avg_time_data_exchange;
55
56
57 using namespace tflite;
58
59 #ifdef __cplusplus
60 extern "C" {
61 #endif
62 // This is where the execution of the operations or whole graph
     happens.
63 // The class below has an empty implementation just as a
     guideline
64 // on the structure.
65 class DTPU_delegate {
66  public:
67   // Returns true if my delegate can handle this type of op.
68   static bool SupportedOp(const TfLiteRegistration* registration
       ) {
69   // from builtin_ops.h
70   #ifdef DEBUG
71   printf("[DEBUG - C]--- Supported Operation of DTPU delegate
       class --- \n");
72   #endif
73     switch (registration->builtin_code) {
74       /*case kTfLiteBuiltinConv2d:
75         only_con2d=true;
76         #ifdef DEBUG
77         printf("[DEBUG-C]-- Supported operations only 2d
             convolution----\n");
78         #endif
79         */
80       case kTfLiteBuiltinDepthwiseConv2d:
81       #ifdef DEBUG
82         printf("[DEBUG - C]--Hello world! I can make 2D
             convolution and depth wise 2D convolution---\n");
83         #endif
84         return true;
85       default:
86         return false;
87     }
88   }
89
90   // Any initialization code needed
91   bool Init(TfLiteContext* context,const TfLiteDelegateParams*
```

```
    delegate_params) {
92  #ifdef DEBUG
93    printf("[DEBUG - C]--- Init of DTPU delegate class --- \n");
94    #endif
95
96     #ifdef DEBUG
97       printf("[DEBUG - C]--- Init of DTPU delegate class check
            if tensors indexes are equal to the ones in the Invoke
           --- \n");
98    for (int input_index: TfLiteIntArrayView(delegate_params->
        input_tensors)){
99
100      printf("[DEBUG - C]--- Init of DTPU delegate class getting
           tensors %d--- \n",input_index);
101
102   }
103     #endif
104
105   if(time_probe){
106     avg_time_delegate=0.00;
107     avg_time_data_exchange=0.00;
108     n_execution=0;
109   }
110
111   // instantiate buffcfers and soft reset of accelerator
112   return Init_p(context->tensors_size,delegate_params->
        input_tensors->size ,delegate_params->output_tensors->
        size);
113
114 }
115 // Any preparation work needed (e.g. allocate buffers)
116 TfLiteStatus Prepare(TfLiteContext* context, TfLiteNode* node)
      {
117 #ifdef DEBUG
118 printf("[DEBUG - C]--- Prepare of DTPU delegate class --- \n")
     ;
119 #endif
120     // initialize, link the buffers accordint to the size of
        node data
121   // kTfLiteMmapRo  aka weights
122   int num_weight_tensor=0;
123   // set precison check
124   if(NO_FP==-1){
125         printf("ERROR! Need to execute
            SelectDataTypeComputation function before calling
            the Tensorflow Interpreter\n");
126          return kTfLiteError ;
127     }
128
```

```
129
130     for (int input_index : TfLiteIntArrayView(node->inputs)){
131       // one of this should be the weight tensor
132       auto&  in_t= context->tensors[input_index];
133       if(in_t.allocation_type==kTfLiteMmapRo){
134               num_weight_tensor++;
135               #ifdef DEBUG
136               printf("[DEBUG -C]---found a tensor weight %d----\
                     n", input_index);
137               #endif
138       // get dimesion of tensors
139       // push to python sublayer
140        if(!NO_FP){
141       switch(bit_width_computation){
142       default:
143       case 8:
144           #ifdef DEBUG
145                     if(signed_computation){
146                       printf("[DEBUG-C]---- kTfLiteInt8 ------\n
                           ");
147                     }else{
148                       printf("[DEBUG-C]---- kTfLiteUInt8 ------\
                           n");
149                     }
150           #endif
151           if(signed_computation){
152           push_weight_to_heap(in_t.data.int8, in_t.dims->data,
                 in_t.dims->size);
153           }else {
154           push_weight_to_heap( in_t.data.uint8, in_t.dims->data,
                 in_t.dims->size);
155           }
156
157         break;
158       case 16:
159             #ifdef DEBUG
160                     printf("[DEBUG-C]---- kTfLiteInt16 ------\n"
                           );
161             #endif
162                   push_weight_to_heap( in_t.data.i16, in_t.dims
                        ->data, in_t.dims->size);
163                   break;
164       case 32:
165       #ifdef DEBUG
166                   printf("[DEBUG-C]---- kTfLiteInt32 ------\n");
167           #endif
168             push_weight_to_heap( in_t.data.i32, in_t.dims->data,
                   in_t.dims->size);
169             break;
```

```
170       case 64:
171           #ifdef DEBUG
172                 printf("[DEBUG-C]---- kTfLiteInt64 ------\n");
173           #endif
174                 push_weight_to_heap( in_t.data.i64, in_t.dims->
                       data, in_t.dims->size);
175                 break;
176       }
177       }
178       else { // use fp units
179         switch (bit_width_computation){
180         case 16:
181               if(context->allow_fp32_relax_to_fp16 && NO_FP==3 )
                       { // NO_FP==3 -> fp active and bfp active
182                    #ifdef DEBUG
183              printf("[DEBUG-C]---- kTfLitefloat32 relaxed aka
                       bfp16 ------\n");
184              #endif
185                // remembedr f16 is TfLiteFloat16*
186
187              /*typedef struct {
188                    uint16_t data;
189                } TfLiteFloat16;
190                */
191              push_weight_to_heap( in_t.data.f16, in_t.dims->data,
                       in_t.dims->size);
192                }
193                break;
194         case 32:
195              #ifdef DEBUG
196              printf("[DEBUG-C]---- kTfLitefloat32 ------\n");
197              #endif
198                push_weight_to_heap( in_t.data.f, in_t.dims->data,
                       in_t.dims->size);
199                break;
200         default:
201              printf("[DEBUG-C]---- ERROR! no fp precision defined
                       ------\n");
202              break;
203       }
204
205       }
206       }
207     }
208     #ifdef DEBUG
209     printf("[DEBUG-C]--- number of weights found= %d \n",
          num_weight_tensor);
210     #endif
211       if(Prepare_p(num_weight_tensor)){
```

```
212       return kTfLiteOk;
213       }
214      return kTfLiteError ;
215
216   }
217   // Actual running of the delegate subgraph.
218   TfLiteStatus Invoke(TfLiteContext* context, TfLiteNode* node)
         {
219     struct timespec ts_start,ts_end;
220     int curr_input=0;
221     #ifdef DEBUG
222     printf("[DEBUG-C]--- Invoke of DTPU delegate class --- \n"
          );
223     printf("[DEBUG-C]--- Invoke of DTPU delegate class getting
           tensors --- \n");
224     #endif
225
226
227     if(time_probe){
228           if(!timespec_get(&ts_start,TIME_UTC)){
229           fprintf(stderr,"error during the acquisition of start
              time!\n");
230           exit(-1);
231               }
232     }
233
234     // run inference on the delegate  and data transfer to/from
         memory/accelerator
235     for (int input_index : TfLiteIntArrayView(node->inputs)){
236       // one of this should be the weight tensor
237       #ifdef DEBUG
238       printf("[DEBUG-C]--- Invoke of DTPU delegate class
            getting tensors %d--- \n",input_index);
239       #endif
240       TfLiteTensor  in_t= context->tensors[input_index];
241       if(!(in_t.allocation_type==kTfLiteMmapRo)){ //cause the
            weights have been transferred into the Prepare method
242           if(curr_input!=0){
243             curr_input=input_index;
244           }
245       // get dimesion of tensors
246       // push to python sublayer
247        if(!NO_FP){
248       switch(bit_width_computation){
249       default:
250       case 8:
251           #ifdef DEBUG
252                     if(signed_computation){
253                       printf("[DEBUG-C]---- kTfLiteInt8 ------\n
```

```
                    ");
254                 }else{
255                   printf("[DEBUG-C]---- kTfLiteUInt8 ------\
                        n");
256                 }
257       #endif
258       if(signed_computation){
259     push_input_tensor_to_heap(in_t.data.int8,in_t.dims->data
            ,in_t.dims->size);
260       }else {
261       push_input_tensor_to_heap(in_t.data.uint8,in_t.dims->
            data,in_t.dims->size);
262       }
263
264       break;
265     case 16:
266       #ifdef DEBUG
267               printf("[DEBUG-C]---- kTfLiteInt16 ------\n"
                    );
268       #endif
269         push_input_tensor_to_heap(in_t.data.i16,in_t.dims
              ->data,in_t.dims->size);
270           break;
271     case 32:
272     #ifdef DEBUG
273             printf("[DEBUG-C]---- kTfLiteInt32 ------\n");
274       #endif
275         push_input_tensor_to_heap(in_t.data.i32,in_t.dims->
            data,in_t.dims->size);
276         break;
277     case 64:
278       #ifdef DEBUG
279           printf("[DEBUG-C]---- kTfLiteInt64 ------\n");
280       #endif
281         push_input_tensor_to_heap(in_t.data.i64,in_t.dims->
            data,in_t.dims->size);
282           break;
283     }
284     }
285     else { // use fp units
286       switch (bit_width_computation){
287       case 16:
288           if(context->allow_fp32_relax_to_fp16 && NO_FP==3 )
                { // NO_FP==3 -> fp active and bfp active
289             #ifdef DEBUG
290         printf("[DEBUG-C]---- kTfLitefloat32 relaxed aka
              bfp16 ------\n");
291         #endif
292           push_input_tensor_to_heap(in_t.data.f16,in_t.dims
```

```
                ->data,in_t.dims->size);
293             }
294             break;
295       case 32:
296           #ifdef DEBUG
297           printf("[DEBUG-C]---- kTfLitefloat32 ------\n");
298           #endif
299             push_input_tensor_to_heap(in_t.data.f,in_t.dims->
                  data,in_t.dims->size);
300             break;
301       default:
302           printf("[DEBUG-C]---- ERROR! no fp precision defined
                ------\n");
303           break;
304     }
305
306     }
307
308     }
309   }
310
311
312   for (int output_index : TfLiteIntArrayView(node->outputs)){
313     auto&  out_t= context->tensors[output_index];
314     // get dimesion of tensors
315     // push to python sublayer
316
317     #ifdef DEBUG
318     printf("[DEBUG - C]--- Invoke of DTPU delegate class
          getting output tensors %d--- \n",output_index);
319     #endif
320
321      if(!NO_FP){
322     switch(bit_width_computation){
323     default:
324     case 8:
325         #ifdef DEBUG
326                   if(signed_computation){
327                     printf("[DEBUG-C]---- kTfLiteInt8 ------\n
                          ");
328                   }else{
329                     printf("[DEBUG-C]---- kTfLiteUInt8 ------\
                          n");
330                   }
331         #endif
332         if(signed_computation){
333         push_output_tensor_to_heap(out_t.data.int8,out_t.dims
              ->data,out_t.dims->size);
334         }else {
```

```
335             push_output_tensor_to_heap(out_t.data.uint8,out_t.dims
                    ->data,out_t.dims->size);
336             }
337
338           break;
339         case 16:
340               #ifdef DEBUG
341                       printf("[DEBUG-C]---- kTfLiteInt16 ------\n"
                            );
342               #endif
343                 push_output_tensor_to_heap(out_t.data.i16,out_t.
                        dims->data,out_t.dims->size);
344                  break;
345         case 32:
346         #ifdef DEBUG
347                      printf("[DEBUG-C]---- kTfLiteInt32 ------\n");
348             #endif
349               push_output_tensor_to_heap(out_t.data.i32,out_t.dims
                    ->data,out_t.dims->size);
350               break;
351         case 64:
352             #ifdef DEBUG
353                    printf("[DEBUG-C]---- kTfLiteInt64 ------\n");
354             #endif
355               push_output_tensor_to_heap(out_t.data.i64,out_t.dims
                    ->data,out_t.dims->size);
356                break;
357         }
358         }
359         else { // use fp units
360           switch (bit_width_computation){
361           case 16:
362                 if(context->allow_fp32_relax_to_fp16 && NO_FP==3 )
                        { // NO_FP==3 -> fp active and bfp active
363                       #ifdef DEBUG
364                printf("[DEBUG-C]---- kTfLitefloat32 relaxed aka
                           bfp16 ------\n");
365               #endif
366                 push_output_tensor_to_heap(out_t.data.f16,out_t.
                        dims->data,out_t.dims->size); // a uint16
                        pointer
367                 }
368                 break;
369           case 32:
370               #ifdef DEBUG
371               printf("[DEBUG-C]---- kTfLitefloat32 ------\n");
372               #endif
373                 push_output_tensor_to_heap(out_t.data.f,out_t.dims
                        ->data,out_t.dims->size);
```

```
374                 break;
375           default:
376               printf("[DEBUG-C]---- ERROR! no fp precision defined
                      ------\n");
377               break;
378         }
379
380         }
381
382         }
383         if(time_probe){
384         if(!timespec_get(&ts_end, TIME_UTC)){
385           fprintf(stderr,"erorr during the acquisition of end time
                !\n");
386           exit(-1);
387         }
388         // update average and execution time
389         avg_time_data_exchange+=ts_end.tv_sec*1000 + ((double)
              ts_end.tv_nsec)/1000000 - ts_start.tv_sec*1000 - ((
              double)ts_start.tv_nsec)/1000000;
390
391         n_execution++;
392         }
393
394         if(time_probe){
395         if(!timespec_get(&ts_start, TIME_UTC)){
396           fprintf(stderr,"erorr during the acquisition of end time
                !\n");
397           exit(-1);
398         }
399         }
400       if(Invoke_p(only_con2d,curr_input)){
401         if(time_probe){
402         if(!timespec_get(&ts_end, TIME_UTC)){
403           fprintf(stderr,"erorr during the acquisition of end time
                !\n");
404           exit(-1);
405         }
406         avg_time_delegate+=ts_end.tv_sec*1000 + ((double)ts_end.
              tv_nsec)/1000000 - ts_start.tv_sec*1000 - ((double)
              ts_start.tv_nsec)/1000000;
407         }
408         return kTfLiteOk;
409         }
410        return kTfLiteError ;
411       }
412
413 };
414
```

```
415
416 TfLiteStatus SelectDataTypeComputation(int data_type ){
417 #ifdef DEBUG
418 printf("[DEBUG - C]--- SelectDataTypeComputation of DTPU
      delegate class --- \n");
419 #endif
420 int precision= data_type & 0x000f;
421 signed_computation= ((data_type & 0x00100)>>8)==1 ? true :
      false;
422
423 NO_FP= (data_type & 0x060)>>5;
424 switch(precision){
425   default:
426   case 1: //INT8
427   bit_width_computation=8;
428   break;
429   case 3: //INT16
430   bit_width_computation=16;
431   break;
432   case 7: //INT32
433   bit_width_computation=32;
434   break;
435   case 15: //INT64
436     bit_width_computation=64;
437     break;
438 }
439 // check compatibilyt of signed and unsigned
440 if(signed_computation && bit_width_computation!=8){
441   printf("ERROR-> signed/unsigned distinction is only
        compatible with 8 bit computation");
442   return kTfLiteError;
443 }
444 if(SelectDataTypeComputation_p(data_type) ){
445     return kTfLiteOk;
446     }
447    return kTfLiteError ;
448 }
449
450 TfLiteStatus ResetHardware( ){
451 #ifdef DEBUG
452 printf("[DEBUG - C]---  Reset underlaying hardware --- \n");
453 #endif
454 if(ResetHardware_p()){
455     return kTfLiteOk;
456     }
457    return kTfLiteError ;
458
459 }
460
```

```
461 // Create the TfLiteRegistration for the Kernel node which will
    replace
462 // the subgraph in the main TfLite graph.
463 TfLiteRegistration GetMyDelegateNodeRegistration() {
464   // This is the registration for the Delegate Node that gets
      added to
465   // the TFLite graph instead of the subGraph it replaces.
466   // It is treated as a an OP node. But in our case
467   // Init will initialize the delegate
468   // Invoke will run the delegate graph.
469   // Prepare for preparing the delegate.
470   // Free for any cleaning needed by the delegate.
471   #ifdef DEBUG
472   printf("[DEBUG - C] --- get delegate node registration
      function ---\n");
473   #endif
474   TfLiteRegistration kernel_registration;
475   kernel_registration.builtin_code = kTfLiteBuiltinDelegate;
476   kernel_registration.custom_name = "DTPU_delegate";
477   kernel_registration.free = [](TfLiteContext* context, void*
      buffer) -> void {
478     delete reinterpret_cast<DTPU_delegate*>(buffer);
479   };
480   kernel_registration.init = [](TfLiteContext* context, const
      char* buffer,
481                                 size_t) -> void* {
482     // In the node init phase, initialize MyDelegate instance
483     const TfLiteDelegateParams* delegate_params =
484         reinterpret_cast<const TfLiteDelegateParams*>(buffer);
485     DTPU_delegate* my_delegate = new DTPU_delegate;
486     if (!my_delegate->Init(context, delegate_params)) {
487       return nullptr;
488     }
489     return my_delegate;
490   };
491   kernel_registration.invoke = [](TfLiteContext* context,
492                                   TfLiteNode* node) ->
                                      TfLiteStatus {
493     DTPU_delegate* kernel = reinterpret_cast<DTPU_delegate*>(
        node->user_data);
494     return kernel->Invoke(context, node);
495   };
496   kernel_registration.prepare = [](TfLiteContext* context,
497                                    TfLiteNode* node) ->
                                       TfLiteStatus {
498     DTPU_delegate* kernel = reinterpret_cast<DTPU_delegate*>(
        node->user_data);
499     return kernel->Prepare(context, node);
500   };
```

```
501
502   return kernel_registration;
503 }
504
505 // TfLiteDelegate methods
506 // interface to tensorflow runtime
507 TfLiteStatus DelegatePrepare(TfLiteContext* context,
      TfLiteDelegate* delegate) {
508   // Claim all nodes that can be evaluated by the delegate and
        ask the
509   // framework to update the graph with delegate kernel instead.
510   // Reserve 1 element, since we need first element to be size.
511   #ifdef DEBUG
512   printf("[DEBUG - C] ---- preparing the delegate ----\n");
513   #endif
514   std::vector<int> supported_nodes(1);
515   TfLiteIntArray* plan;
516   TF_LITE_ENSURE_STATUS(context->GetExecutionPlan(context, &plan
        ));
517   TfLiteNode* node;
518   TfLiteRegistration* registration;
519   for (int node_index : tflite::TfLiteIntArrayView(plan) ) {
520     TF_LITE_ENSURE_STATUS(context->GetNodeAndRegistration(
521         context, node_index, &node, &registration));
522     if (DTPU_delegate::SupportedOp(registration)) {
523       supported_nodes.push_back(node_index);
524     }
525   }
526   // Set first element to the number of nodes to replace.
527   supported_nodes[0] = supported_nodes.size() - 1;
528   TfLiteRegistration my_delegate_kernel_registration =
529       GetMyDelegateNodeRegistration();
530
531   // This call split the graphs into subgraphs, for subgraphs
        that can be
532   // handled by the delegate, it will replace it with a
533   // 'my_delegate_kernel_registration'
534   return context->ReplaceNodeSubsetsWithDelegateKernels(
535       context, my_delegate_kernel_registration,
536       reinterpret_cast<TfLiteIntArray*>(supported_nodes.data()),
            delegate);
537 }
538
539 void FreeBufferHandle(TfLiteContext* context, TfLiteDelegate*
      delegate,
540                       TfLiteBufferHandle* handle) {
541   #ifdef DEBUG
542   printf("[DEBUG - C]--- Do any cleanups---\n");
543   #endif
```

```
544   FreeBufferHandle_p();
545 }
546
547
548 TfLiteStatus CopyToBufferHandle(TfLiteContext* context,
549                                 TfLiteDelegate* delegate,
550                                 TfLiteBufferHandle buffer_handle
                                      ,
551                                 TfLiteTensor* tensor) {
552   #ifdef DEBUG
553   printf("[DEBUG-C]--- Copies data from tensor to delegate
        buffer if needed.----\n");
554   #endif
555   if(CopyToBufferHandle_p()){
556   return kTfLiteOk;
557   }
558   return kTfLiteError;
559 }
560
561 TfLiteStatus CopyFromBufferHandle(TfLiteContext* context,
562                                   TfLiteDelegate* delegate,
563                                   TfLiteBufferHandle
                                        buffer_handle,
564                                   TfLiteTensor* tensor) {
565   #ifdef DEBUG
566   printf("[DEBUG-C]---Copies the data from delegate buffer
        into the tensor raw memory----\n");
567   #endif
568   if(CopyFromBufferHandle_p()){
569   return kTfLiteOk;
570   }
571   return kTfLiteError;
572 }
573
574 TfLiteStatus activate_time_probe(bool activate){
575   #ifdef DEBUG
576   printf("[DEBUG-C]---- activating time probes ----\n");
577   #endif
578   if (!time_probe && activate){
579     time_probe=true;
580       #ifdef DEBUG
581           printf("[DEBUG-C]---- activated time probes ----\n");
582         #endif
583     activate_time_probe_p(activate);
584   } else{
585     printf("ATTENTION! Time probes are not active\n");
586
587   }
588    return kTfLiteOk;
```

```
589
590 }
591
592
593 TfLiteStatus print_execution_stats(){
594   #ifdef DEBUG
595   printf("[DEBUG - C]----- printing time probes of the library
        -----\n");
596   #endif
597     printf("If you are seeing too many zeros you probably did
        not set the time probes variable to true!\n");
598
599   // print c time probes
600     printf("Overall time of delegate invoke: %3f [ms]\n",
        avg_time_delegate/n_execution);
601     printf("Data exchange between interfaces (C->Python->C): %3f
         [ms]\n",avg_time_data_exchange/n_execution);
602
603   // print python time probes
604   if(print_python_time_probes()){
605     return kTfLiteOk;
606   }
607   return kTfLiteError;
608
609 }
610
611 TfLiteStatus measure_power_consumption(){
612 #ifdef DEBUG
613   printf("[DEBUG - C]---Measuring power consumption of the
        accelerator during invoke ----\n");
614   #endif
615   if(start_power_consumption()){
616     return kTfLiteOk;
617   }
618   return kTfLiteError;
619
620 }
621
622 TfLiteStatus print_power_consumption(){
623   #ifdef DEBUG
624   printf("[DEBUG - C]---Printing power consumption of the
        accelerator during invoke ----\n");
625   #endif
626   if(print_power_consumption_p()){
627     return kTfLiteOk;
628   }
629   return kTfLiteError;
630 }
631
```

```
632 // instantiate the delegate, it returns null if there is an
    error
633 TfLiteDelegate * tflite_plugin_create_delegate()
634 //char** argv , char** argv2, size_t argc, void (*report_error)(
    const char *) )
635   {
636   TfLiteDelegate* delegate = new TfLiteDelegate;
637
638   delegate->data_ = nullptr;
639   delegate->flags = kTfLiteDelegateFlagsNone;
640   delegate->Prepare = &DelegatePrepare;
641   // This cannot be null.
642   delegate->CopyFromBufferHandle = &CopyFromBufferHandle;
643   // This can be null.
644   delegate->CopyToBufferHandle = &CopyToBufferHandle;
645   // This can be null.
646   delegate->FreeBufferHandle = &FreeBufferHandle;
647   // load overlay
648   load_overlay();
649   #ifdef DEBUG
650   printf("[DEBUG - C] ---the delegate method of DTPU is born for
        TensorFlow %s---\n",TF_Version());
651   #endif
652   return delegate;
653 }
654
655
656 void tflite_plugin_destroy_delegate(void  * delegate_op , void *
     argtypes) {
657 // destroy the delegate
658 TfLiteDelegate * delegate= (TfLiteDelegate *) delegate_op;
659 #ifdef DEBUG
660 printf("[DEBUG - C]-----cleaning memory  -> callback of python
    function---\n");
661 #endif
662 if(!destroy_p()) {
663   printf("ERROR IN FREEING BUFFERS!");
664 }
665 //free(argtypes);
666 free(delegate);
667 }
668 #ifdef __cplusplus
669 } // extern "C"
670 #endif
```

Frozen python code in the accelerator library:

```
from dtpu_lib import ffi
from pynq import Overlay
from pynq import allocate
from pynq import MMIO
from pynq import Xlnk
from pynq.lib import dma
import numpy as np
import math
import _thread
import sys
import time
import struct # see https://docs.python.org/3/library/struct.html#struct-examples
_DEBUG_PRINT=True
_TIME_PROBES=False
##############################
##### memory map of xadc #####
##############################
C_BASEADDRESS=0x43C10000 #
SRR=  0x0 # w software reset register
SR=  0x04 # r status register
AOSR= 0x08 # r allarm output status register
CONVSTR= 0x0C # w Bit[0] = ADC convert start register (3) Bit[1] = Enable temperature update logic Bit[17:2] = Wait cycle for temperature update
SYSMONRR=0x10 # w xadc hard macro reset register
GIER=0x5C # rw global interrupt enable register
IPISR=0x60 # r toggle on write ip interrupt status register
IPIER=0x68 # rw ip interrupt enable register
TEMPERATURE=0x200 # The 12-bit Most Significant Bit (MSB) justified result of on-device temperature measurement is stored in this register
VCC_INT=0x204 # The 12-bit MSB justified result of on-device VCCINT supply monitor measurement is storedin this register.
VCC_AUX=0x208 # The 12-bit MSB justified result of on-device VCCAUX Data supply monitor measurement is stored in this register
VP_VN=0x20C # rw When read: The 12-bit MSB justified result of A/D conversion on the dedicated analog input channel (Vp/Vn) is stored in this register.When written: Write to this regiter resets theXADC hard macro
VREF_P=0x210 # r The 12-bit MSB justified result of A/D conversion on the reference input V REFP is stored in this register.
VREF_N= 0x214 #r The 12-bit MSB justified result of A/D conversion on the reference input V REFN is stored in this register.
VCC_BRAM= 0x218 # r The 12-bit MSB justified result of A/D
```

```
    conversion on the reference input V BRAM is stored in this
    register
34 SUPPLY_A_OFFSET=0x220 # r The calibration coefficient for the
    supply  sensor offset of ADC A is stored in this register
35 ADC_A_OFFSET=  0x224 # r The calibration coefficient for the ADC
     A offset calibration is stored in this register.
36 ADC_A_GAIN_ERR=0x228 # r The calibration coefficient for the
    gain error of ADC A is stored in this register.
37 DEV_CORE_SUPPLY=0x234 #r  The  VCCINT of PSS core supply.
    Present only  on Zynq-7000 devices.
38 DEV_AUX_CORE_SUPPLY=0x238 # r The VCCAUX of PSS core supply.
    Present only on Zynq-7000 devices.
39 DEV_CORE_MEM_SUPPLY=0x23C # r The VCCMEM of PSS core supply.
    Present only on Zynq-7000 devices
40 # v axux p/n
41 V_AUX_0=  0x240 #r The 12-bit MSB justified result of A/D
    conversion on the auxiliary analog input 0 is  stored in this
     register.
42 V_AUX_1=  0x244 #r
43 V_AUX_2=  0x248 #r
44 V_AUX_3=  0x24C #r
45 V_AUX_4=  0x250 #r
46 V_AUX_5=  0x254 #r
47 V_AUX_6=  0x258 #r
48 V_AUX_7=  0x25C #r
49 V_AUX_8=  0x260 #r
50 V_AUX_9=  0x264 #r
51 V_AUX_10= 0x268 #r
52 V_AUX_11= 0x26C #r
53 V_AUX_12= 0x270 #r
54 V_AUX_13= 0x274 #r
55 V_AUX_14= 0x278 #r
56 V_AUX_15= 0x27C #r
57 ## value of 12 bit msb
58 MAX_TMP= 0x280   # r
59 MAX_VCC_INT= 0x284   # r
60 MAX_VCC_AUX= 0x288   # r
61 MAV_V_BRAM= 0x28C   # r
62 MIN_TMP= 0x290   # r
63 MIN_VCC_INT= 0x294   # r
64 MIN_VCC_AUX= 0x298   # r
65 MIN_V_BRAM=0x29C   # r
66 MAX_VCC_PINT= 0x2A0 # r
67 MAX_VCC_PAUX= 0x2A4 # r
68 MAX_VCC_DDRO= 0x2A8 # r
69 MIN_VCC_PINT= 0x2b0 # r
70 MIN_VCC_PAUX= 0x2b4 # r
71 MIN_VCC_DDRO= 0x2b8 # r
72 SUPPLY_B_OFFSET= 0x2C0 # r The calibration coefficient for the
```

```
    supply  sensor offset of ADC A is stored in this register
73 ADC_B_OFFSET=  0x2C4 # r The calibration coefficient for the ADC
     A offset calibration is stored in this register.
74 ADC_B_GAIN_ERR= 0x2C8 # r The calibration coefficient for the
    gain error of ADC A is stored in this register.
75 FLAGS=0x2FC # The 16-bit register gives general status
    information of ALARM, Over Temperature (OT), Disable XADC
    information. Whether the XADC is using the internal reference
     voltage or external reference voltage is also p
76 CONF_REG_0=0x300 # rw
77 CONF_REG_1=0x304 # rw
78 CONF_REG_2=0x308 # rw
79 SEQ_REG_0= 0x320 # r/w adc channel selection
80 SEQ_REG_1= 0x324 # r/w adc channel selection
81 SEQ_REG_2= 0x328 # r/w adc channel average enable
82 SEQ_REG_3= 0x32C # r/w adc channel average enable
83 SEQ_REG_4= 0x330 # r/w adc channel analog input mode
84 SEQ_REG_5= 0x334 # r/w adc channel analog input mode
85 SEQ_REG_6= 0x338 # r/w adc channel acquistion
86 SEQ_REG_7= 0x33C # r/w adc channel acquistion
87 ALLARM_THRESHOLD_0= 0x340 #rw The 12bit MSB justified alarm
    threshold register 0 Temperature Upper
88 ALLARM_THRESHOLD_1= 0x344 #rw he 12bit MSB justified alarm
    threshold register 1 V CCINT Upper
89 ALLARM_THRESHOLD_2= 0x348 #rw The 12bit MSB justified alarm
    threshold register 2 V CCAUX Upper
90 ALLARM_THRESHOLD_3= 0x34C #rw the 12bit MSB justified alarm
    threshold register 3 T Upper
91 ALLARM_THRESHOLD_4= 0x350 #rw the 12bit MSB justified alarm
    threshold register 4 Temperature Lower
92 ALLARM_THRESHOLD_5= 0x354 #rw  the 12bit MSB justified alarm
    threshold register 5 V CCINT Lower
93 ALLARM_THRESHOLD_6= 0x358 #rw The 12bit MSB justified alarm
    threshold register 6 V CCAUX Lower
94 ALLARM_THRESHOLD_7= 0x35C # rw The 12bit MSB justified alarm
    threshold register 7 OT Lower
95 ALLARM_THRESHOLD_8= 0x360 # rw The 12bit MSB justified alarm
    threshold register 8 VBRAM Upper
96 ALLARM_THRESHOLD_9= 0x364 # rw The 12bit MSB justified alarm
    threshold  register 9 V CCPint Upper This register is only on
     Zynq-7000 devices.
97 ALLARM_THRESHOLD_10= 0x368 # rw The 12bit MSB justified alarm
    threshold  register 10 V CCPaux Upper This register is only
    on Zynq-7000 devices
98 ALLARM_THRESHOLD_11= 0x36C # rw The 12bit MSB justified alarm
    threshold register 11  CCDDRO Upper This register is  only on
     Zynq-7000 devic
99 ALLARM_THRESHOLD_12= 0x370 # rw he 12bit MSB justified alarm
    threshold register 12 VBRAM Lower
```

```
100 ALLARM_THRESHOLD_13= 0x374 # rw The 12Bit MSB justified alarm
    threshold register 13 V CCPint Lower This register is only on
     Zynq-7000 devices
101 ALLARM_THRESHOLD_14= 0x378 # rw The 12bit MSB justified alarm
    threshold register 14 V CCPaux Lower This register is only on
     Zynq-7000 devices
102 ALLARM_THRESHOLD_15= 0x37C # rw he 12bit MSB justified alarm
    threshold register 15 v CCDDRO Lower This register is only on
     Zynq-7000 devices
103 ##########################################################
104 ############ MEMORY MAP of acceleratro #################
105 ##########################################################
106 BASE_ADDRESS_ACCELERATOR=0x43C00000
107 ADDRESS_RANGE_ACCELERATOR=0x10000
108 # address reg offset
109 CTRL =0x0000
110 STATUS =0x0004
111 IARG_RQT_EN =0x0010
112 OARG_RQT_EN =0x0014
113 CMD =0x0028
114 OARG_LENGTH_MODE =0x003C
115 ISCALAR_FIFO_RST =0x0040
116 OSCALAR_FIFO_RST =0x0044
117 ISCALAR_RQT_EN =0x0048
118 OSCALAR_RQT_EN =0x004C
119 ISCALAR0_DATA =0x0080
120 ISCALAR1_DATA =0x0084
121 ISCALAR2_DATA =0x0088
122 ISCALAR3_DATA =0x008C
123 ISCALAR4_DATA =0x0090
124 ISCALAR5_DATA =0x0094
125 ISCALAR6_DATA =0x0098
126 ISCALAR7_DATA =0x009C
127 ISCALAR8_DATA =0x00A0
128 ISCALAR9_DATA =0x00A4
129 ISCALAR10_DATA=0x00A8
130 ISCALAR11_DATA =0x00AC
131 ISCALAR12_DATA =0x00B0
132 ISCALAR13_DATA =0x00B4
133 ISCALAR14_DATA =0x00B8
134 ISCALAR15_DATA =0x00BC
135 OSCALAR0_DATA =0x00C0
136 OSCALAR1_DATA =0x00C4
137 OSCALAR2_DATA =0x00C8
138 OSCALAR3_DATA =0x00CC
139 OSCALAR4_DATA =0x00D0
140 OSCALAR5_DATA =0x00D4
141 OSCALAR6_DATA =0x00D8
142 OSCALAR7_DATA =0x00DC
```

```
143 IARG0_STATUS =0x0100
144 IARG1_STATUS =0x0104
145 IARG2_STATUS =0x0108
146 IARG3_STATUS =0x010C
147 IARG4_STATUS =0x0110
148 IARG5_STATUS =0x0114
149 IARG6_STATUS =0x0118
150 IARG7_STATUS =0x011C
151 OARG0_STATUS =0x0140
152 OARG1_STATUS =0x0144
153 OARG2_STATUS =0x0148
154 OARG3_STATUS =0x014C
155 OARG4_STATUS =0x0150
156 OARG5_STATUS =0x0154
157 OARG6_STATUS =0x0158
158 OARG7_STATUS =0x015C
159 ISCALAR0_STATUS =0x0180
160 ISCALAR1_STATUS =0x0184
161 ISCALAR2_STATUS =0x0188
162 ISCALAR3_STATUS =0x018C
163 ISCALAR4_STATUS =0x0190
164 ISCALAR5_STATUS =0x0194
165 ISCALAR6_STATUS =0x0198
166 ISCALAR7_STATUS =0x019C
167 ISCALAR8_STATUS =0x01A0
168 ISCALAR9_STATUS =0x01A4
169 ISCALAR10_STATUS =0x01A8
170 ISCALAR11_STATUS =0x01AC
171 ISCALAR12_STATUS =0x01B0
172 ISCALAR13_STATUS =0x01B4
173 ISCALAR14_STATUS =0x01B8
174 ISCALAR15_STATUS =0x01BC
175 OSCALAR0_STATUS =0x01C0
176 OSCALAR1_STATUS =0x01C4
177 OSCALAR2_STATUS =0x01C8
178 OSCALAR3_STATUS =0x01CC
179 OSCALAR4_STATUS =0x01D0
180 OSCALAR5_STATUS =0x01D4
181 OSCALAR6_STATUS =0x01D8
182 OSCALAR7_STATUS =0x01DC
183 OSCALAR8_STATUS =0x01E0
184 OSCALAR9_STATUS =0x01E4
185 OSCALAR10_STATUS =0x01E8
186 OSCALAR11_STATUS =0x01EC
187 OSCALAR12_STATUS =0x01F0
188 OSCALAR13_STATUS =0x01F4
189 OSCALAR14_STATUS =0x01F8
190 OSCALAR15_STATUS =0x01FC
191 OARG0_LENGTH =0x0200
```

```
192 OARG1_LENGTH =0x0204
193 OARG2_LENGTH =0x0208
194 OARG3_LENGTH =0x020C
195 OARG4_LENGTH =0x0210
196 OARG5_LENGTH =0x0214
197 OARG6_LENGTH =0x0218
198 OARG7_LENGTH =0x021C
199 OARG0_TDEST =0x0240
200 OARG1_TDEST =0x0244
201 OARG2_TDEST =0x0248
202 OARG3_TDEST =0x024C
203 OARG4_TDEST =0x0250
204 OARG5_TDEST =0x0254
205 OARG6_TDEST =0x0258
206 OARG7_TDEST =0x025C
207 ########################################################
208 ##########        CSR DEFINITIONS             ##########
209 ##########           MEMORY MAP               ##########
210 ##########            bitwidth 8              ##########
211 ##########            see csr_definition.vh   ##########
212 ########################################################
213 ARITHMETIC_PRECISION=0
214 FP_MODE=1
215 BATCH_SIZE=2 # aka active rows
216 TRANSPARENT_DELAY_REGISTER=3
217 DEBUG=4
218 TEST_OPTIONS=5
219 ACTIVATE_CHAIN=0x1
220 INT8=0x1
221 INT16=0X3
222 INT32=0x7
223 INT64=0xF
224 # precision of fp computation is tuned using the
225 # integer precision
226 ACTIVE_FP=1
227 ACTIVE_BFP=0x03
228 ROUNDING=0x00
229 NO_FP=0x00
230 SIGNED=0x1
231 NO_SIGNED=0x0
232 WMEM_STARTING_ADDRESS=0 #32 MSB
233 ################################################
234 #### accelerator adapter command #############
235 ################################################
236 CMD_UPDATE_IN_ARG=0x0
237 CMD_UPDATE_OUT_ARG=0x1
238 CMD_EXECUTE_STEP=0x2
239 CMD_EXECUTE_CONTINOUS=0x4
240 CMD_STOP_EXECUTE_CONTINOUS=0x5
```

```
241 ##########################################
242 BASE_ADDRESS_INTC=0x40800000
243 ADDRESS_RANGE_INTC=0x10000
244 BASE_ADDRESS_DMA_INFIFO=0x40400000
245 ADDRESS_RANGE_DMA_INFIFO=0x10000
246 BASE_ADDRESS_DMA_WM=0x40410000
247 ADDRESS_RANGE_DMA_WM=0x10000
248 accelerator=None
249 infifo_buffer_transfer=None
250 output_fifo_buffer=None
251 weight_buffer=None
252 csr_buffer=None
253 overlay=None
254 driver_csr=None
255 driver_wm=None
256 driver_fifo_in=None
257 driver_fifo_out=None
258 ####################################
259 ### DESIGN DEPENDENT DEFINITION #####
260 ####################################
261 WMEM_SIZE=16384 # 1Mbytes
262 CSRMEM_SIZE=1024
263 INFIFO_SIZE=2048  #1Kbytes
264 OUTFIFO_SIZE=2048 #1Kbytes
265 ROWS=0
266 COLUMNS=0
267 DATAWIDTH=64
268 BUFFER_DEPTH=2
269 output_size=0
270 input_size=0
271 tot_size_weight=0
272 tot_size_input=0
273 tot_size_output=0
274 curr_data_precision=INT8
275 curr_bitwidth_data_computation=8
276 PACK_TYPE="b" # default is 1 byte signed for integer lower case
      -> signed upper case-> unsigned
277 DTYPE_NP=np.uint8
278 FP=False
279 BFP=False
280 size_tot=0
281 num_weight=0
282 global_iteration=1 ## at least one execution of the tensor
      accelerator
283 global_iteration_shift_wm=[]
284 weight_tensors=[]
285 input_tensors=[]
286 output_tensors=[]
287 output_tensors_p=[]
```

```
288 weight_buffer_multiple=[]
289 index_wm=0
290 class Tensor:
291   def __init__(self,data, tot_dim,size_l):
292     self.tot_dim=tot_dim
293     self.data=data
294     self.size_l=size_l
295 filter_height=0
296 filter_width=0
297 ########################
298 ##### time probes #####
299 ########################
300 avg_hw_execution=0.0
301 n_execution=0
302 avg_hw_execution_internal=0.00
303 n_execution_internal=0
304 ######################
305 ###### XADC #########
306 ######################
307 xadc_mon=None
308 ##################################################
309 ##### Retrieve and display power consumption  ####
310 ##### Supply sensor: Vccint,Vccaux,Vccbram    ####
311 #####      Vccpint, Vccpaux,Vcc0ddr           #####
312 ##### Nominal values of resistances and Vcc ######
313 ##################################################
314 # from vivado report power
315 # [V]
316 vcc_pl_int_nom=1.00
317 vcc_pl_aux_nom=1.80
318 vcc_pl_bram_nom= 1.00
319 vcc_ps_int_nom=1.80
320 vcc_ps_aux_nom=1.80
321 vcc_ddr_nom=1.50
322 # equivalent series resitstances of capacitor -> worst case
323 # [omh]
324 r_pl_int=225
325 r_pl_aux=300
326 r_pl_bram=225
327 r_ps_int=225
328 r_ps_aux=400
329 r_ddr= 0.005
330 n_sample=1
331 ps_power=0
332 pl_power=0
333 mem_power=0
334 ps_power_max=sys.float_info.min
335 pl_power_max=sys.float_info.min
336 mem_power_max=sys.float_info.min
```

```
337 ps_power_min=sys.float_info.max
338 pl_power_min=sys.float_info.max
339 mem_power_min=sys.float_info.max
340 tmp_max=sys.float_info.min
341 tmp_min=sys.float_info.max
342 tmp_avg=0.00
343
344 def sample_power( threadName, delay):
345   global ps_power
346   global pl_power
347   global mem_power
348   global n_sample
349   global xadc_mon
350   global vcc_ps_aux_nom
351   global ps_power_max
352   global pl_power_max
353   global mem_power_max
354   global ps_power_min
355   global pl_power_min
356   global mem_power_min
357   global tmp_max
358   global tmp_min
359   global tmp_avg
360   while True:
361     time.sleep(0.8/1000)
362     vcc_pl_int=( xadc_mon.read(VCC_INT) & 0x0000FFF0) >> 4
363     vcc_pl_int= (vcc_pl_int* vcc_ps_aux_nom) / 4096
364     vcc_pl_aux=( xadc_mon.read(VCC_AUX) & 0x0000FFF0) >> 4
365     vcc_pl_aux= (vcc_pl_aux* vcc_ps_aux_nom) / 4096
366     vcc_pl_bram= ( xadc_mon.read(VCC_BRAM) & 0x0000FFF0) >> 4
367     vcc_pl_bram= (vcc_pl_bram* vcc_ps_aux_nom) / 4096
368     vcc_ps_int= ( xadc_mon.read(DEV_CORE_SUPPLY) & 0x0000FFF0)
          >> 4
369     vcc_ps_int= (vcc_ps_int* vcc_ps_aux_nom) / 4096
370     vcc_ps_aux=( xadc_mon.read(DEV_AUX_CORE_SUPPLY) & 0x0000FFF0
          ) >> 4
371     vcc_ps_aux= (vcc_ps_aux* vcc_ps_aux_nom) / 4096
372     vcc_ddr= ( xadc_mon.read(DEV_CORE_MEM_SUPPLY) & 0x0000FFF0)
          >> 4
373     vcc_ddr= (vcc_ddr* 3) / 4096
374     n_sample+=1
375     ps_power_i=((vcc_ps_int_nom-vcc_ps_int)/r_ps_int)*
          vcc_ps_int_nom + ((vcc_ps_aux_nom-vcc_ps_aux)/r_ps_aux)*
          vcc_ps_aux_nom
376     pl_power_i= ((vcc_pl_int_nom-vcc_pl_int)/r_pl_int)*
          vcc_pl_int_nom + ((vcc_pl_aux_nom-vcc_pl_aux)/r_pl_aux)*
          vcc_pl_aux_nom + ((vcc_pl_bram_nom-vcc_pl_bram)/r_pl_bram
          )*vcc_pl_bram_nom
377     mem_power_i=((vcc_ddr-vcc_ddr_nom)/r_ddr)*vcc_ddr
```

```
378     ## update max
379     if pl_power_i > pl_power_max:
380       pl_power_max=pl_power_i
381     if ps_power_i > ps_power_max:
382       ps_power_max=ps_power_i
383     if mem_power_i > mem_power_max:
384       mem_power_max=mem_power_i
385     #update min
386     if pl_power_i < pl_power_min:
387       pl_power_min=pl_power_i
388     if ps_power_i < ps_power_min:
389       ps_power_min=ps_power_i
390     if mem_power_i < mem_power_min:
391       mem_power_min=mem_power_i
392     ## update values for the averages
393     ps_power+=ps_power_i
394     pl_power+=pl_power_i
395     mem_power+=mem_power_i
396     # temperature
397     tmp=( xadc_mon.read(TEMPERATURE) & 0x0000FFF0) >> 4
398     tmp=(tmp* 503.975)/4096 - 273.15
399     ## update max
400     if tmp > tmp_max:
401       tmp_max=tmp
402     ## update min
403     if tmp < tmp_min:
404       tmp_min=tmp
405     tmp_avg+=tmp
406
407 ########################################
408 ############ LOAD DESIGN #############
409 ########################################
410 @ffi.def_extern()
411 def load_overlay():
412   global accelerator
413   global overlay
414   global xadc_mon
415   global ROWS
416   global COLUMNS
417   global    ps_power
418   global pl_power
419   global mem_power
420   global ps_power_max
421   global pl_power_max
422   global mem_power_max
423   global ps_power_min
424   global pl_power_min
425   global mem_power_min
426   global tmp_max
```

```
427 global tmp_min
428 global tmp_avg
429 ## modify this part for choosing a different overlay and
    recompile the library
430 f_clk="30mhz"
431 datawidth="only_integer8"
432 mxu_size="mxu_8x8"
433 ROWS=8
434 COLUMNS=8
435 print("Hardware design space points",f_clk," ", " ", mxu_size,
     " ", datawidth)
436 overlay = Overlay("/home/xilinx/dtpu_configurations/"+
    datawidth+"/"+f_clk+"/" + mxu_size+"/pynqz2.bit") # tcl is
    also parsed
437 overlay.download() # Explicitly download bitstream to PL
438 if overlay.is_loaded():
439  # Checks if a bitstream is loaded
440  if _DEBUG_PRINT: print("[DEBUG- PYTHON] ----overlay is loaded
      ----")
441 else :
442   if _DEBUG_PRINT: print("[DEBUG- PYTHON] ---- overlay is not
      loaded----")
443   exit(-1)
444 if overlay.monitor is not None:
445   xadc_mon=overlay.monitor.xadc_wiz_0_0
446   xadc_mon.write(SRR,0x0000000A) # reset
447 else:
448   print("ERROR NO XADC")
449 if overlay.dtpu is not None:
450   accelerator=overlay.dtpu.axis_accelerator_ada
451 else:
452   print("ERROR NO ACCELERATOR")
453   exit(-1)
454 overlay.reset()
455 # clean power variable
456 n_sample=1
457 ps_power=0
458 pl_power=0
459 mem_power=0
460 ps_power_max=sys.float_info.min
461 pl_power_max=sys.float_info.min
462 mem_power_max=sys.float_info.min
463 ps_power_min=sys.float_info.max
464 pl_power_min=sys.float_info.max
465 mem_power_min=sys.float_info.max
466 tmp_max=sys.float_info.min
467 tmp_min=sys.float_info.max
468 tmp_avg=0.00
469
```

```
470
471 @ffi.def_extern()
472 def Init_p(tot_tensors,input_tens_size,output_tens_size):
473   global accelerator
474   global overlay
475   global size_tot
476   global input_size
477   global output_size
478   global avg_hw_execution
479   global n_execution
480   global avg_hw_execution_internal
481   global n_execution_internal
482   global tmp_avg
483   if _DEBUG_PRINT: print("[DEBUG - PYTHON] --- Init p function
        ---")
484   ## soft reset and accelerator configuration
485   accelerator.write(CTRL,0x0000001)
486   accelerator.write(CTRL,0x0000000)
487   accelerator.write(IARG_RQT_EN,0x000000007) ## all data
        avialable csr, weights and data
488   accelerator.write(OARG_LENGTH_MODE,0x00000001) # software mode
489   accelerator.write(OARG0_LENGTH,OUTFIFO_SIZE) # size outfifo
490   accelerator.write(ISCALAR_RQT_EN,0) # NO input SCALAR
491   accelerator.write(OSCALAR_RQT_EN,0) # no output scalar
492   accelerator.write(OARG0_TDEST,0) # only one output
493   size_tot=tot_tensors
494   if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- total tensors",
        size_tot,"---")
495   input_size=input_tens_size
496   if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- int tensors",
        input_size,"---")
497   output_size=output_tens_size
498   if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- out tensors",
        output_tens_size,"---")
499   n_execution=0
500   avg_hw_execution=0.00
501   avg_hw_execution_internal=0.00
502   n_execution_internal=0
503   tmp_avg=0.00
504   return True
505
506
507 @ffi.def_extern()
508 def SelectDataTypeComputation_p(data_type):
509   global curr_data_precision
510   global curr_bitwidth_data_computation
511   global PACK_TYPE
512   global FP
513   global BFP
```

```
514   global DTYPE_NP
515   if _DEBUG_PRINT: print("[DEBUG - PYTHON ] ---
          SelectDataTypeComputation DTPU class ---")
516   if data_type!=0:
517     #case switch
518     if ((data_type)&0x00000f)==INT8:
519       curr_data_precision=INT8
520       curr_bitwidth_data_computation=8
521       if (data_type&0x00100)==SIGNED:
522         PACK_TYPE="b"
523         DTYPE_NP=np.int8
524       else:
525         PACK_TYPE="B"
526         DTYPE_NP=np.uint8
527     elif ((data_type)&0x00000f)==INT16:
528       curr_data_precision=INT16
529       curr_bitwidth_data_computation=16
530       if (data_type&0x00100)==SIGNED:
531         PACK_TYPE="h"
532         DTYPE_NP=np.int16
533       else:
534         PACK_TYPE="H"
535         DTYPE_NP=np.uint16
536     elif ((data_type)&0x00000f)==INT32:
537       curr_data_precision=INT32
538       curr_bitwidth_data_computation=32
539       if (data_type&0x00100)==SIGNED:
540         PACK_TYPE="i"
541         DTYPE_NP=np.int32
542       else:
543         PACK_TYPE="I"
544         DTYPE_NP=np.uint32
545     elif ((data_type)&0x00000f)==INT64:
546       curr_data_precision=INT64
547       curr_bitwidth_data_computation=64
548       if (data_type&0x00100)==SIGNED:
549         PACK_TYPE="q"
550         DTYPE_NP=np.int64
551       else:
552         PACK_TYPE="Q"
553         DTYPE_NP=np.uint64
554     else:
555       print("ERROR PYTHON! Setting the Data type of computation"
              )
556     # floating point check
557     if ((data_type & 0x000060)>> 5)== ACTIVE_FP:
558       FP=True
559       BFP=False
560       PACK_TYPE="f"
```

```
561         DTYPE_NP=np.float32
562       elif ((data_type & 0x000060)>> 5)== ACTIVE_BFP:
563         FP=True
564         BFP=True
565         PACK_TYPE="e"
566         DTYPE_NP=np.uint16 ## accroding to tensorflow bfp16
              representation
567       else:
568         FP=False
569         BFP=False
570     else:
571       curr_data_precision=INT8
572       curr_bitwidth_data_computation=8
573       FP=False
574       BFP=False
575     if _DEBUG_PRINT:
576       print("[DEBUG-PYTHON]----precision default 8 bit signed----"
            )
577       print("[DEBUG-PYTHON]---- Signed :",PACK_TYPE.islower()," 
            type: ",curr_data_precision, "  ->",
            curr_bitwidth_data_computation,"------")
578     return True
579 
580 @ffi.def_extern()
581 def push_input_tensor_to_heap( tensor,size,dim_size):
582     global input_tensors
583     global tot_size_input
584     #push the tensor to the heap for handling their transfefr in
          the Prepare_p
585     tot_size=1
586     if not(FP) or not(BPF):
587       if PACK_TYPE.islower(): # signed
588         if curr_data_precision==INT8:
589           tensor_i=ffi.cast("int8_t *",tensor)
590         elif curr_data_precision==INT16:
591           tensor_i=ffi.cast("int16_t *",tensor)
592         elif curr_data_precision==INT32:
593           tensor_i=ffi.cast("int32_t *",tensor)
594         else: # int64
595           tensor_i=ffi.cast("int64_t *",tensor)
596       else: #unsigned
597         if curr_data_precision==INT8:
598           tensor_i=ffi.cast("uint8_t *",tensor)
599         elif curr_data_precision==INT16:
600           tensor_i=ffi.cast("uint16_t *",tensor)
601         elif curr_data_precision==INT32:
602           tensor_i=ffi.cast("uint32_t *",tensor)
603         else: # int64
604           tensor_i=ffi.cast("uint64_t *",tensor)
```

```
605   else:
606     if BFP:
607       tensor_i=ffi.cast("uint16_t *",tensor)
608     else:
609       tensor_i=ffi.cast("float *",tensor)
610   size_i=ffi.cast("int *",size)
611   tot_size=1
612   size_l=4*[1]
613   data_p=[]
614   for i in range(dim_size):
615     size_l[i]=size[i]
616     tot_size*=size[i]
617   tot_size_input+=tot_size
618   if _DEBUG_PRINT: print("[DEBUG-PYTHON]----- size of tensor
        input ",tot_size_input,"------")
619   for i in range (tot_size):
620     data_p.append(tensor_i[i])
621   input_tensors.append(Tensor(data_p,tot_size,size_l))
622
623 @ffi.def_extern()
624 def push_output_tensor_to_heap(tensor, size,dim_size):
625   global output_tensors
626   global tot_size_output
627   global output_tensors_p
628   #push the tensor to the heap for handling their transfefr in
        the Prepare_p
629   tot_size=1
630   output_tensors_p.append(tensor)
631   if not(FP) or not(BPF):
632     if PACK_TYPE.islower(): # signed
633       if curr_data_precision==INT8:
634         tensor_i=ffi.cast("int8_t *",tensor)
635       elif curr_data_precision==INT16:
636         tensor_i=ffi.cast("int16_t *",tensor)
637       elif curr_data_precision==INT32:
638         tensor_i=ffi.cast("int32_t *",tensor)
639       else: # int64
640         tensor_i=ffi.cast("int64_t *",tensor)
641     else: #unsigned
642       if curr_data_precision==INT8:
643         tensor_i=ffi.cast("uint8_t *",tensor)
644       elif curr_data_precision==INT16:
645         tensor_i=ffi.cast("uint16_t *",tensor)
646       elif curr_data_precision==INT32:
647         tensor_i=ffi.cast("uint32_t *",tensor)
648       else: # int64
649         tensor_i=ffi.cast("uint64_t *",tensor)
650   else:
651     if BFP:
```

```
652         tensor_i=ffi.cast("uint16_t *",tensor)
653       else:
654         tensor_i=ffi.cast("float *",tensor)
655     size_i=ffi.cast("int *",size)
656     tot_size=1
657     size_l=4*[1]
658     data_p=[]
659     for i in range(dim_size):
660       size_l[i]=size[i]
661       tot_size*=size[i]
662     tot_size_output+=tot_size
663     if _DEBUG_PRINT: print("[DEBUG-PYTHON]----- size of tensor
          output ",tot_size,"-----")
664     for i in range (tot_size):
665       data_p.append(0)
666     output_tensors.append(Tensor(data_p,tot_size,size_l))
667
668 @ffi.def_extern()
669 def push_weight_to_heap(tensor,size,dim_size):
670     global weight_tensors
671     global tot_size_weight
672     #push the tensor to the heap for handling their transfefr in
          the Prepare_p
673     tot_size=1
674     if not(FP) or not(BPF):
675       if PACK_TYPE.islower(): # signed
676         if curr_data_precision==INT8:
677           tensor_i=ffi.cast("int8_t *",tensor)
678         elif curr_data_precision==INT16:
679           tensor_i=ffi.cast("int16_t *",tensor)
680         elif curr_data_precision==INT32:
681           tensor_i=ffi.cast("int32_t *",tensor)
682         else: # int64
683           tensor_i=ffi.cast("int64_t *",tensor)
684       else: #unsigned
685         if curr_data_precision==INT8:
686           tensor_i=ffi.cast("uint8_t *",tensor)
687         elif curr_data_precision==INT16:
688           tensor_i=ffi.cast("uint16_t *",tensor)
689         elif curr_data_precision==INT32:
690           tensor_i=ffi.cast("uint32_t *",tensor)
691         else: # int64
692           tensor_i=ffi.cast("uint64_t *",tensor)
693     else:
694       if BFP:
695         tensor_i=ffi.cast("uint16_t *",tensor)
696       else:
697         tensor_i=ffi.cast("float *",tensor)
698     size_i=ffi.cast("int *",size)
```

```
699   tot_size=1
700   size_l=4*[1]
701   data_p=[]
702   for i in range(dim_size):
703     size_l[i]=size[i]
704     tot_size*=size[i]
705   tot_size_weight+=tot_size
706   if _DEBUG_PRINT: print("[DEBUG-PYTHON]----- size of tensor
        weight ",tot_size_weight,"-----")
707   for i in range (tot_size):
708     data_p.append(tensor_i[i])
709   weight_tensors.append(Tensor(data_p,tot_size,size_l))
710
711 @ffi.def_extern()
712 def Prepare_p(weight_num):
713   global output_fifo_buffer
714   global infifo_buffer_transfer
715   global weight_buffer
716   global csr_buffer
717   global overlay
718   global driver_wm
719   global driver_csr
720   global driver_fifo_in
721   global driver_fifo_out
722   global num_weight
723   global global_iteration
724   global global_iteration_shift_wm
725   global curr_data_precision
726   global weight_tensors
727   global filter_height
728   global filter_width
729   global weight_buffer_multiple
730   global index_wm
731   if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- Prepare p of
        DTPU class ---")
732   if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- in size",
        input_size,"output size",output_size," ---")
733   if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- weigth size",
        weight_num," ---")
734   #allocate buffers for data transfer
735   num_weight=weight_num
736   filter_height=num_weight*[0]
737   filter_width=num_weight*[0]
738   ## symmetric input/output fifo
739   output_fifo_buffer=allocate(shape=(INFIFO_SIZE,),dtype='u8')
740   weight_buffer=allocate(shape=(WMEM_SIZE,),dtype='u8')
741   csr_buffer=allocate(shape=(CSRMEM_SIZE,),dtype='u8')
742   infifo_buffer_transfer=allocate(shape=(INFIFO_SIZE,),dtype='u8
        ')
```

```
743   driver_wm=overlay.axi_dma_weight_mem
744   driver_csr=overlay.axi_dma_csr_mem
745   driver_fifo_in=overlay.axi_dma_infifo
746   driver_fifo_out=overlay.axi_dma_outfifo
747   #
        ##########################################################################

748   ########### populate buffers pack depending on the precision
        #########
749   #
        ##########################################################################

750   if _DEBUG_PRINT:
751     print("[DEBUG - PYTHON ] --- Prepare p of DTPU class ",
          num_weight,"weight to transfer  ---")
752     for i in range(num_weight):
753       tmp=weight_tensors[i]
754       print("[DEBUG-PYTHON] ---- weight ",i,"-----")
755       print("[DEBUG-PYTHON] ---- size ",*tmp.size_l,"-----")
756       for j in range(tmp.tot_dim):
757         print(tmp.data[j],end=" ")
758     print("",end="\n")
759   index_wm=0# it eats the first data ?
760   shift=int(64/curr_bitwidth_data_computation)
761   iter=int(tot_size_weight/(WMEM_SIZE*(64/
        curr_bitwidth_data_computation))) # if it fits in th
        eaccelerator memory
762   # always 4D tensors
763   # assumptio is that the filter sizes always fit the
        accelerator
764   if False:
765     weight_buffer_multiple=1
766     for w_ind in range(1): # pack only the weight for deep wise
          convolution
767       tmp=np.array(weight_tensors[w_ind].data, dtype=DTYPE_NP)
768       tmp=tmp.reshape(*weight_tensors[w_ind].size_l)
769       filter_height[w_ind],filter_width[w_ind]=tmp.shape[1:3]
770       for i in range(len(tmp)):
771         for l in range(weight_tensors[w_ind].size_l[3]):
772           global_iteration_shift_wm.append(index_wm)
773           for j in range(len(tmp[i])):
774               # boundary check
775               shift=int(64/curr_bitwidth_data_computation)
776               if shift > len(tmp[i]):
777                 shift=len(tmp[i])
778               weight_buffer[index_wm]=np.uint64(int.from_bytes(
                    tmp[i,j,0:shift,l],byteorder="little",signed=
                    False))
779               index_wm+=1
```

```
780             for j in range(ROWS-len(tmp[i])):
781               weight_buffer[index_wm]=0
782               index_wm+=1 # padding with zeros
783     else:
784       #print("it requires multiple iterations for the weight
              matrix") # multiple iteration on total weight 1MB should
              be enou-gh
785       weight_buffer_multiple=[]*np.uint64(0)
786       for w_ind in range(1): # pack only the weight for deep wise
              convolution
787         tmp=np.array(weight_tensors[w_ind].data, dtype=DTYPE_NP)
788         tmp=tmp.reshape(*weight_tensors[w_ind].size_l)
789         filter_height[w_ind],filter_width[w_ind]=tmp.shape[1:3]
790         for i in range(len(tmp)):
791           for l in range(weight_tensors[w_ind].size_l[3]):
792             global_iteration_shift_wm.append(index_wm)
793             for j in range(len(tmp[i])):
794                 # boundary check
795                 shift=int(64/curr_bitwidth_data_computation)
796                 if shift > len(tmp[i]):
797                   shift=len(tmp[i])
798                 weight_buffer_multiple.append(np.uint64(int.
                      from_bytes( tmp[i,j,0:shift,l],byteorder="
                      little",signed=False)))
799                 index_wm+=1
800             for j in range(ROWS-len(tmp[i])):
801               weight_buffer[index_wm]=0
802               index_wm+=1 # padding with zeros
803     if _DEBUG_PRINT:
804       for i in range(10):
805         print(hex(weight_buffer[i]))
806     ################################
807     ###### transferring data #######
808     ################################
809     weight_buffer.flush()
810     return True
811
812 @ffi.def_extern()
813 def Invoke_p(only_conv2d,input_shift):
814     global infifo_buffer_transfer
815     global driver_csr
816     global driver_wm
817     global driver_fifo_in
818     global driver_fifo_out
819     global csr_buffer
820     global weight_buffer
821     global output_fifo_buffer
822     global accelerator
823     global global_iteration
```

```
824   global global_iteration_shift_wm
825   global curr_data_precision
826   global input_tensors
827   global output_tensors
828   global filter_width
829   global filter_height
830   global tot_size_output
831   global tot_size_input
832   global output_tensors_p
833   global avg_hw_execution
834   global n_execution
835   global avg_hw_execution_internal
836   global n_execution_internal
837   global weight_buffer_multiple
838   #
         ##########################################################################

839   ############ populate buffers pack depending on the precision
         #########
840   #
         ##########################################################################

841   tmp=[]
842   if _DEBUG_PRINT:
843     print("[DEBUG - PYTHON ] --- Invoke p of DTPU class",
           input_size-num_weight,"input tensors to transfer ---")
844     for i in range( input_size-num_weight):
845       tmp=input_tensors[i]
846       print("[DEBUG-PYTHON] ----- input tensor ",i,"------")
847       print("[DEBUG-PYTHON] ----- size ",*tmp.size_l,"------")
848       for j in range(tmp.tot_dim):
849         print(tmp.data[j],end=" ")
850   index=0
851   shift=int(64/curr_bitwidth_data_computation)
852   # check if it fits the inputs
853   # always 4D tensors
854   # assumptio is that the filter sizes always fit the
         accelerator
855   #then compact
856   ## split the input shape into submatrices equalt to filter
         sizes
857   applyed_weight=0
858   #over allocate input_fifo_buffer
859   input_fifo_buffer = []*np.uint64(0)
860   for w_ind in range(len(input_tensors)):
861     tmp=np.array(input_tensors[w_ind].data, dtype=DTYPE_NP)
862     tmp=tmp.reshape(*input_tensors[w_ind].size_l)
863     for batch in range(len(tmp)):
864       for channel in range(tmp.shape[-1]):
```

```
865         tmp_s=tmp[batch,:,:,channel]
866         #iteration for the whole matrix
867         for i in range(len(tmp_s)-filter_height[applyed_weight])
                :
868           for j in range(len(tmp_s[i])-filter_width[
                applyed_weight]):
869             tmp_ss=tmp_s[i:i+filter_height[applyed_weight],j:j+
                  filter_width[applyed_weight]]
870             for row in range(len(tmp_ss)):
871               shift=int(64/curr_bitwidth_data_computation)
872               if shift> len(tmp_ss):
873                 shift=len(tmp_ss)
874               input_fifo_buffer.append(np.uint64(int.from_bytes(
                    tmp_ss[row,0:shift],byteorder="little",signed=
                    False)))
875               index+=1
876   input_fifo_buffer=np.array(input_fifo_buffer,dtype='u8')
877   input_fifo_buffer=np.reshape(input_fifo_buffer,newshape=(index
        ,))
878   if _DEBUG_PRINT:
879     for i in range(10):
880       print(hex(input_fifo_buffer[i]))
881   #iterate on the output matrix with also multiple weight
        iteration and inputs
882   ## assumption is that the output tensor is always one!
883   ## getting the output matrix structure
884   #accelerator.write(CMD, (0x0000000 |(CMD_EXECUTE_CONTINOUS
        <<16)))
885   output_matrix=np.array(output_tensors[0].data, dtype=DTYPE_NP)
886   output_matrix=output_matrix.reshape(*output_tensors[0].size_l)
887   point_wise=np.array(weight_tensors[1].data,dtype=DTYPE_NP)
888   ########################################
889   ####### deepwise convolution #########
890   ########################################
891   if _DEBUG_PRINT:
892     print("[DEBUG-PYTHON] ---------- deepwise convolution
          --------")
893   if _TIME_PROBES:
894     start_time=time.time()
895   for shift_w in range(math.ceil(len(weight_buffer_multiple)/
        WMEM_SIZE)):
896     ################################################
897     ###### program the dma for the weight ##########
898     ################################################
899     if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- transfering weight
          buffer ----")
900     weight_buffer[0:len(weight_buffer_multiple[WMEM_SIZE*(
          shift_w):WMEM_SIZE*(shift_w+1)])]=weight_buffer_multiple[
          WMEM_SIZE*(shift_w):WMEM_SIZE*(shift_w+1)]
```

```
901     driver_wm.sendchannel.transfer(weight_buffer)
902     driver_wm.sendchannel.wait()
903     for batch_i in range(input_tensors[0].size_l[0]):
904       for channel_i in range(input_tensors[0].size_l[-1]):
905         ################################################
906         ###### program the dma for the csr reg #########
907         ################################################
908         if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- transfering
                csr buffer for weight----")
909         csr_buffer[ARITHMETIC_PRECISION]=(
                global_iteration_shift_wm[channel_i]<<32) | ((NO_FP
                <<8)) | (ACTIVATE_CHAIN<<4)| (curr_data_precision)
910         #csr_buffer.flush()
911         driver_csr.sendchannel.transfer(csr_buffer)
912         #driver_csr.sendchannel.wait()
913         for infifo_shift in range(math.ceil(input_fifo_buffer.
                size/INFIFO_SIZE)):
914           ########################################################
915           ###### program the dma for the in/out fifos ##########
916           ########################################################
917           if _TIME_PROBES:
918             start_time_i=time.time()
919           if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- transfering
                input buffer",infifo_shift," ----")
920           infifo_buffer_transfer[0:input_fifo_buffer[INFIFO_SIZE
                *(infifo_shift):INFIFO_SIZE*(infifo_shift+1)].size
                ]=input_fifo_buffer[INFIFO_SIZE*(infifo_shift):
                INFIFO_SIZE*(infifo_shift+1)]
921           driver_fifo_in.sendchannel.transfer(
                infifo_buffer_transfer)
922           #driver_fifo_in.sendchannel.wait()
923           accelerator.write(OARG0_LENGTH,OUTFIFO_SIZE) # size
                outfifo
924           accelerator.write(CMD, (0x0000000 |(CMD_EXECUTE_STEP
                <<16)))
925           accelerator.write(CMD,((CMD_UPDATE_OUT_ARG<<16)|(1)))
926           driver_fifo_out.recvchannel.transfer(
                output_fifo_buffer)
927           if _DEBUG_PRINT: print("[DEBUG-PYTHON]----- getting
                output data -----")
928           driver_fifo_out.recvchannel.wait()
929           if _TIME_PROBES:
930             end_time_i=time.time()
931             avg_hw_execution_internal+=end_time_i-start_time_i
932             n_execution_internal+=1
933           if _DEBUG_PRINT: print(output_fifo_buffer)
934           accelerator.write(CMD,((CMD_UPDATE_IN_ARG<<16)|(4))) #
                update input fifo
935           #
```

```
936             ######################################################################
                ####### unpack the output buffer depending on the
                    precision ########
937             #
                    ######################################################################
938             ## get values from output fifo buffer and put them
                    into an array in order to sum all the data
939             for i in range(output_matrix.shape[1]-1):
940               for j in range(output_matrix.shape[2]-1):
941                 tmp_sum=np.zeros(shape=(ROWS,int(64/
                        curr_bitwidth_data_computation)),dtype=DTYPE_NP
                        )
942                 tmp_data=output_fifo_buffer[channel_i*(ROWS*
                        COLUMNS)+i*ROWS+j*COLUMNS:channel_i*(ROWS*
                        COLUMNS)+(i+1)*ROWS+(j+1)*COLUMNS]
943                 tmp_sum=np.frombuffer(tmp_data.tobytes(),dtype=
                        DTYPE_NP)
944                 #reshuffle and check if it is worth it
945                 #if tmp_data.size >0:
946                 #  for row in range(len(tmp_data)):
947                 #    if row in tmp_data:
948                 #      tmp_sum[row]=np.frombuffer(tmp_data[row].
                        tobytes(),dtype=DTYPE_NP)#convert(tmp_data[row
                        ])
949                 output_matrix[batch_i,i,j,channel_i]=np.multiply(
                        tmp_sum.sum(dtype=DTYPE_NP),point_wise[
                        channel_i],dtype=DTYPE_NP)
950           accelerator.write(CMD,((CMD_UPDATE_IN_ARG<<16)|(1))) #
                  update csr
951         accelerator.write(CMD,((CMD_UPDATE_OUT_ARG<<16)|(1)))
952       accelerator.write(CMD,((CMD_UPDATE_IN_ARG<<16)|(2))) #
              update w memory
953     #if _DEBUG_PRINT:
954     # print("[DEBUG-PYTHON]------- point wise convolution
          ---------")
955     if _TIME_PROBES:
956       end_time=time.time()
957       avg_hw_execution+=end_time-start_time
958       n_execution+=1
959     accelerator.write(STATUS,0x00000003)##clear status
960     #accelerator.write(CMD,((CMD_UPDATE_IN_ARG<<16)|(1))) # update
          csr
961     #accelerator.write(CMD, (0x0000000 |(
          CMD_STOP_EXECUTE_CONTINOUS<<16)))  # stop accelerator
962     ##########################################
963     ######## point wise convolution ########### moved inside
          previous loop
```

```
964   ########################################
965   #for batch_i in range(len(output_matrix)):
966   #  for i in range(len(output_matrix[batch_i])):
967   #    for j in range(len(output_matrix[batch_i,i])):
968   #      for channel_i in range(len(output_matrix[batch_i,i,j]))
          :
969   #        output_matrix[batch_i,i,j,channel_i]=output_matrix[
          batch_i,i,j,channel_i]*weight_tensors[1].data[channel_i]
970   if _DEBUG_PRINT: print("[DEBUG -PYTHON] ---- accelerator done
          ----")
971   if _DEBUG_PRINT:
972     print("[DEBUG-PYTHON] ------ final output data to tensorflow
            -----")
973     print(output_matrix)
974   # copy the output matrix to tensorflow environment ffi.memmove
        (dest,src,nbytets)
975   ffi.memmove(ffi.buffer(output_tensors_p[0],output_matrix.
        nbytes),output_matrix,output_matrix.nbytes)
976   # save the pointer to the output and then substitute the
        values into the point wise convolution
977   #clean up input/output
978   input_tensors=[]
979   output_tensors=[]
980   tot_size_input=0
981   tot_size_output=0
982   del input_fifo_buffer
983   return True
984
985 @ffi.def_extern()
986 def ResetHardware_p():
987   global accelerator
988   global overlay
989   if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- Reset hardware p
        function ---")
990   overlay.reset()
991   accelerator.write(CTRL,0x0000001)
992   accelerator.write(CTRL,0x0000000)
993   return True
994
995 @ffi.def_extern()
996 def destroy_p():
997   global infifo_buffer_transfer
998   global output_fifo_buffer
999   global csr_buffer
1000  global weight_buffer
1001  global accelerator
1002  global overlay
1003  global global_iteration_shift_wm
1004  global weight_tensors
```

```
1005    global input_tensors
1006    global output_tensors
1007    if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- destroying the
            buffers ---")
1008    infifo_buffer_transfer.freebuffer()
1009    output_fifo_buffer.freebuffer()
1010    csr_buffer.freebuffer()
1011    weight_buffer.freebuffer()
1012    del accelerator
1013    del overlay
1014    del global_iteration_shift_wm
1015    del weight_tensors
1016    del input_tensors
1017    del output_tensors
1018    return True
1019
1020 @ffi.def_extern()
1021 def CopyFromBufferHandle_p():
1022    if _DEBUG_PRINT: print("[DEBUG - PYTHON ] ---  the  from
            delegate and buffers ---")
1023    return True
1024
1025 @ffi.def_extern()
1026 def CopyToBufferHandle_p():
1027    if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- copying  to  the
             delegate and buffers ---")
1028    return True
1029 @ffi.def_extern()
1030 def FreeBufferHandle_p():
1031    global output_fifo_buffer
1032    global csr_buffer
1033    global weight_buffer
1034    global driver_csr
1035    global driver_wm
1036    global driver_fifo_in
1037    global driver_fifo_out
1038    global accelerator
1039    if _DEBUG_PRINT: print("[DEBUG - PYTHON ] --- freeing buffers
            ---")
1040    output_fifo_buffer.freebuffer()
1041    csr_buffer.freebuffer()
1042    weight_buffer.freebuffer()
1043    del accelerator
1044    del driver_csr
1045    del driver_wm
1046    del driver_fifo_in
1047    del driver_fifo_out
1048
1049 @ffi.def_extern()
```

```
1050 def start_power_consumption():
1051   global xadc_mon
1052   if _DEBUG_PRINT: print("[DEBUG-PYTHON] ---- start measurement
         of  power consumption ----")
1053   if xadc_mon is not None:
1054     try:
1055       _thread.start_new_thread( sample_power, ("Sampling power",
            0.5 ) ) # every 1ms
1056     except:
1057       print("Error: unable to start thread")
1058   return True
1059
1060 @ffi.def_extern()
1061 def print_power_consumption_p():
1062   global xadc_mon
1063   global ps_power
1064   global pl_power
1065   global mem_power
1066   if _DEBUG_PRINT: print("[DEBUG-PYTHON] ---- printing power
         consumption from xadc readings ----")
1067   ################################################
1068   ### Retrieve and display current temperature ###
1069   ################################################
1070   tmp=( xadc_mon.read(TEMPERATURE) & 0x0000FFF0) >> 4
1071   tmp=(tmp* 503.975)/4096 - 273.15
1072   print("Current temperature:",round(tmp,3)," C")
1073   print("Average execution temperature:", round(tmp_avg/n_sample
         ,3)," C")
1074   print("Max temperature:", round(tmp_max,3) ," C")
1075   print("Min temperature:", round(tmp_min,3) ," C")
1076   # printing power consumption
1077   tot_power=ps_power+pl_power+mem_power
1078   print("Average power consumption=", round(tot_power*1000/
         n_sample,5)," mWatt")
1079   print("---> Processing System:",round(ps_power*1000/n_sample
         ,5)," mWatt")
1080   print("---> Programmable Logic:",round(pl_power*1000/n_sample
         ,5)," mWatt")
1081   print("---> Memory:",round(mem_power*1000/n_sample,3)," mWatt"
         )
1082   print("Maximum power consumption")
1083   print("---> Processing System:",round(ps_power_max*1000,5),"
         mWatt")
1084   print("---> Programmable Logic:",round(pl_power_max*1000,5),"
         mWatt")
1085   print("---> Memory:",round(mem_power_max*1000,3)," mWatt")
1086   print("Minimum power consumption")
1087   print("---> Processing System:",round(ps_power_min*1000,5),"
         mWatt")
```

```
1088    print("---> Programmable Logic:",round(pl_power_min*1000,5)," mWatt")
1089    print("---> Memory:",round(mem_power_min*1000,5)," mWatt")
1090    return True
1091
1092  @ffi.def_extern()
1093  def activate_time_probe_p(activate):
1094    global _TIME_PROBES
1095    if _DEBUG_PRINT: print("[DEBUG-PYTHON]--- activating time probe in python -----")
1096    if not(_TIME_PROBES) and activate:
1097      print("Time probes activated")
1098      _TIME_PROBES=True
1099
1100  @ffi.def_extern()
1101  def print_python_time_probes():
1102    if _DEBUG_PRINT: print("[DEBUG-PYTHON]----- printing python time probes -----")
1103    print("Hardware execution time and rebuilding output matrix:", avg_hw_execution/n_execution," [s]")
1104    print("Hardware execution time:", avg_hw_execution_internal/n_execution_internal," [s]")
1105    #print("Hardware calls:",n_execution_internal)
1106    return True
```

B

Top level entity of DTPU core

```
1  //
       ================================================================================
2  //  Filename      : dtpu_core.v
3  //  Created On    : 2020-04-22 17:05:56
4  //  Last Modified : 2020-05-20 15:03:03
5  //  Revision      :
6  //  Author        : Angione Francesco
7  //  Company       : Chalmers University of Technology,Sweden
       - Politecnico di Torino, Italy
8  //  Email         : francescoangione8@gmail.com
9  //
10 //  Description   : Cogitantium, the dumb tensor processor
       unit,top level enity of the accelerator
11 //
12 //
13 //
       ================================================================================
14
15 `timescale 1ns / 1ps
16 `include "precision_def.vh"
17
18 //`define DUMMY
19
20 module dtpu_core
21 #(parameter DATA_WIDTH_MAC=64,
22     ROWS=3 ,
23     COLUMNS=3,
24     SIZE_WMEMORY=8196,
25     ADDRESS_SIZE_WMEMORY=32,
26     ADDRESS_SIZE_CSR=32,
27     SIZE_CSR=1024,
28     DATA_WIDTH_CSR=8,
29     DATA_WIDTH_WMEMORY=64,
30     DATA_WIDTH_FIFO_IN=64,
31     DATA_WIDTH_FIFO_OUT=64,
32     MAX_BOARD_DSP=220
33     )
```

```
34 (
35     input wire clk,
36     (* X_INTERFACE_INFO = "xilinx.com:signal:reset:1.0
          aresetn RST" *)
37     (* X_INTERFACE_PARAMETER = "POLARITY ACTIVE_LOW" *)
38     input wire aresetn,
39     input wire test_mode,
40     input wire enable,
41
42     ////////////////////////////
43     ////// CSR INTERFACE ///////
44     ////////////////////////////
45     (* X_INTERFACE_PARAMETER = "MASTER_TYPE BRAM_CTRL,MEM_ECC
           no,MEM_WIDTH 8,MEM_SIZE 1024 " *)
46     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface EN" *)
47     output wire          csr_ce,
48     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface DOUT" *)
49     input wire [DATA_WIDTH_CSR-1:0]     csr_dout,
50     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface DIN" *)
51     output wire [DATA_WIDTH_CSR-1:0]    csr_din,
52     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface WE" *)
53     output wire          csr_we,
54     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface ADDR" *)
55     output wire [ADDRESS_SIZE_CSR-1:0]     csr_address,
56     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface CLK" *)
57     output wire            csr_clk,
58     (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl:1.0
          csr_mem_interface RST" *)
59     output wire          csr_reset,
60
61       ////////////////////////////
62       ////// WEIGHT MEMORY ///////
63       ////////////////////////////
64       (* X_INTERFACE_PARAMETER = "MASTER_TYPE BRAM_CTRL,
            MEM_ECC no,MEM_WIDTH 64,MEM_SIZE 8192 " *)
65       (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
          :1.0 weight_mem_interface EN" *)
66       output wire  wm_ce,
67       (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
          :1.0 weight_mem_interface DOUT" *)
68       input wire [DATA_WIDTH_WMEMORY-1:0]       wm_dout,
69       (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
          :1.0 weight_mem_interface DIN" *)
```

```
70          output wire [DATA_WIDTH_WMEMORY-1:0]        wm_din,
71          (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
               :1.0 weight_mem_interface WE" *)
72          output wire                 wm_we,
73          (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
               :1.0 weight_mem_interface ADDR" *)
74          output wire [ADDRESS_SIZE_WMEMORY-1:0]  wm_address,
75          (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
               :1.0 weight_mem_interface CLK" *)
76          output wire     wm_clk,
77          (* X_INTERFACE_INFO = "xilinx.com:interface:bram_rtl
               :1.0 weight_mem_interface RST" *)
78          output wire             wm_reset,
79
80          ////////////////////////////////////////////
81          /////////// INPUT DATA FIFO ////////////////
82          ////////////////////////////////////////////
83          /////////// using stream axi
84          (* X_INTERFACE_INFO = "xilinx.com:interface:
               acc_fifo_read:1.0 input_fifo RD_DATA" *)
85          input wire [DATA_WIDTH_FIFO_IN-1:0] infifo_dout,
86            (* X_INTERFACE_INFO = "xilinx.com:interface:
                 acc_fifo_read:1.0 input_fifo RD_EN" *)
87          output wire infifo_read,
88            (* X_INTERFACE_INFO = "xilinx.com:interface:
                 acc_fifo_read:1.0 input_fifo EMPTY_N" *)
89          input wire infifo_is_empty,
90
91
92          ////////////////////////////////////////////
93          /////////// OUTPUT DATA FIFO ///////////////
94          ////////////////////////////////////////////
95          /////////// using stream axi
96          (* X_INTERFACE_INFO = "xilinx.com:interface:
               acc_fifo_write:1.0 output_fifo WR_DATA" *)
97          output wire [DATA_WIDTH_FIFO_OUT-1:0] outfifo_din,
98            (* X_INTERFACE_INFO = "xilinx.com:interface:
                 acc_fifo_write:1.0 output_fifo WR_EN" *)
99          output wire outfifo_write,
100           (* X_INTERFACE_INFO = "xilinx.com:interface:
                 acc_fifo_write:1.0 output_fifo FULL_N" *)
101         input wire outfifo_is_full,
102
103         ////////////////////////////////////////////
104         /////////// CONTROL FROM/TO PS /////////////
105         ////////////////////////////////////////////
106          (* X_INTERFACE_INFO = "xilinx.com:interface:
               acc_handshake_rtl:1.0 control_interface ap_start"
               *)
```

```
107         input wire cs_start,
108          (* X_INTERFACE_INFO = "xilinx.com:interface:
                acc_handshake_rtl:1.0 control_interface ap_ready"
                *)
109         output wire cs_ready,
110          (* X_INTERFACE_INFO = "xilinx.com:interface:
                acc_handshake_rtl:1.0 control_interface ap_done" *)
111         output wire cs_done,
112          (* X_INTERFACE_INFO = "xilinx.com:interface:
                acc_handshake_rtl:1.0 control_interface ap_continue
                " *)
113         input wire cs_continue,
114          (* X_INTERFACE_INFO = "xilinx.com:interface:
                acc_handshake_rtl:1.0 control_interface ap_idle" *)
115         output wire cs_idle,
116
117          // debug state
118         output wire[3:0]state,
119         output wire[3:0]d_out
120           );
121       ////////////////////////////////////////
122       ///*********************************///
123       ///// --------- Cogitantium -------- /////
124       ///// the dumb tensor processing unit ////
125       ///*********************************///
126       ////////////////////////////////////////
127
128         wire [COLUMNS*ROWS*DATA_WIDTH_FIFO_OUT-1:0]
              weight_to_mxu;
129         wire [COLUMNS*DATA_WIDTH_FIFO_IN-1:0] input_data_to_mxu
              ;
130         wire [ROWS*DATA_WIDTH_FIFO_OUT-1:0]
              output_data_from_mxu;
131         wire enable_deskew_ff_i,enable_enskew_ff_i;
132         wire [`LOG_ALLOWED_PRECISIONS-1:0] data_precision;
133         wire enable_i;
134         wire enable_load_array;
135         wire [ROWS*COLUMNS-1:0]read_weight_memory;
136         wire [COLUMNS:0]enable_load_activation_data;
137         wire [COLUMNS:0]enable_store_activation_data;
138         wire enable_cnt;
139         wire ld_max_cnt;
140         wire enable_cnt_weight;
141         wire ld_max_cnt_weight;
142         wire enable_chain;
143         wire ld_weight_page_cnt;
144         wire [1:0]enable_fp_unit;
145
146         wire [ADDRESS_SIZE_WMEMORY-1:0]start_value_wm;
```

```
147       wire [$clog2(COLUMNS):0]max_cnt_from_cu;
148       wire [$clog2(ROWS*COLUMNS):0]max_cnt_weight_from_cu;
149       wire reset_i;
150
151       assign d_out=data_precision;
152
153       assign reset_i=~aresetn;
154      ////////////////////////////////////////////
155     ////// MATRIX MULTIPLICATION UNIT ///////////
156     ////////////////////////////////////////////
157    mxu_wrapper
158     #(.M(ROWS), // matrix row -> weights
159         .K(COLUMNS), // matrix columsn -> input data
160         .max_data_width(DATA_WIDTH_MAC),// it must be a
              divisor of 64
161         .MAX_BOARD_DSP(MAX_BOARD_DSP)
162         ) engine  (
163             .data_type(data_precision),
164             .reset(reset_i),
165             .clk(clk),
166             .enable(enable_i),
167             .enable_chain(enable_chain),
168             .enable_fp_unit(enable_fp_unit),
169             .enable_in_ff(enable_enskew_ff_i),
170             .enable_out_ff(enable_deskew_ff_i),
171             .test_mode(test_mode),
172             .input_data(input_data_to_mxu),
173             .weight(weight_to_mxu),
174             .y(output_data_from_mxu)
175         );
176
177     ////////////////////////////////////////////
178     ////////////// CONTROL UNIT ////////////////////
179     ////////////////////////////////////////////
180     control_unit #( .DATA_WIDTH_FIFO_IN(DATA_WIDTH_FIFO_IN),
181                 .DATA_WIDTH_FIFO_OUT(DATA_WIDTH_FIFO_OUT),
182                 .DATA_WIDTH_WMEMORY(DATA_WIDTH_WMEMORY),
183                 .DATA_WIDTH_CSR(DATA_WIDTH_CSR),
184                 .ROWS(ROWS),
185                 .COLUMNS(COLUMNS),
186                 .ADDRESS_SIZE_CSR(ADDRESS_SIZE_CSR),
187                 .ADDRESS_SIZE_WMEMORY(ADDRESS_SIZE_WMEMORY))
188     cu(
189         .clk(clk),
190         .reset(reset_i),
191         .test_mode(test_mode),
192         .glb_enable(enable),
193         .enable_mxu(enable_i),
194         .csr_address(csr_address),
```

```
195         .csr_dout(csr_dout),
196         .csr_ce(csr_ce),
197         .csr_reset(csr_reset),
198         .csr_we(csr_we),
199         .wm_ce(wm_ce),
200         .wm_reset(wm_reset),
201         .wm_we(wm_we),
202         .infifo_is_empty(infifo_is_empty),
203         .infifo_read(infifo_read),
204         .outfifo_is_full(outfifo_is_full),
205         .outfifo_write(outfifo_write),
206         .cs_continue(cs_continue),
207         .cs_done(cs_done),
208         .cs_idle(cs_idle),
209         .cs_ready(cs_ready),
210         .cs_start(cs_start),
211         .state_out(state),
212         .enable_deskew_ff(enable_deskew_ff_i),
213         .enable_enskew_ff(enable_enskew_ff_i),
214         .enable_fp_unit(enable_fp_unit),
215         .enable_chain(enable_chain),
216         .enable_load_array(enable_load_array),
217         .data_precision(data_precision),
218         .read_weight_memory(read_weight_memory),
219         .enable_load_activation_data(
              enable_load_activation_data),
220         .enable_store_activation_data(
              enable_store_activation_data),
221         .enable_cnt(enable_cnt),
222         .ld_max_cnt(ld_max_cnt),
223         .enable_cnt_weight(enable_cnt_weight),
224         .ld_max_cnt_weight(ld_max_cnt_weight),
225         .ld_weight_page_cnt(ld_weight_page_cnt),
226         .start_value_wm(start_value_wm),
227         .max_cnt_from_cu(max_cnt_from_cu), // it depends on
              the current bitwidt [$clog2(COLUMNS):0]
228         .max_cnt_weight_from_cu(max_cnt_weight_from_cu) //[
              $clog2(ROWS):0]
229
230            );
231
232   ////////////////////////////////////////////
233   ///////// LOAD AND STORE ARRAY     /////////
234   ////////////////////////////////////////////
235   `ifndef DUMMY
236
237
238   ls_array
239   #(   .ROWS(ROWS),
```

```
240         .COLUMNS(COLUMNS),
241         .data_in_width(DATA_WIDTH_FIFO_IN),
242         .data_in_mem(DATA_WIDTH_WMEMORY),
243         .address_leng_wm(ADDRESS_SIZE_WMEMORY),
244         .size_wmemory(SIZE_WMEMORY)) ls_array_inst
245     (
246     .clk(clk),
247     .reset(reset_i),
248     .enable_load_array(enable_load_array),
249     .data_precision(data_precision),
250     .read_weight_memory(read_weight_memory),
251     .infifo_read(infifo_read),
252     .outfifo_write(outfifo_write),
253     .input_data_from_fifo(infifo_dout), //[data_in_width-1:0]
254     .data_to_fifo_out(outfifo_din), //[data_in_width-1:0]
255     .data_from_weight_memory(wm_dout), //[data_in_mem-1:0]
256     .data_from_mxu(output_data_from_mxu), //[data_in_width*ROWS
          -1:0]
257     .data_to_mxu(input_data_to_mxu), //[data_in_width*COLUMNS
          -1:0]
258     .weight_to_mxu(weight_to_mxu), //[data_in_width*ROWS-1:0]
259     .wm_address(wm_address), //[address_leng_wm-1:0]
260     .enable_load_activation_data(enable_load_activation_data),
261     .enable_store_activation_data(enable_store_activation_data)
          ,
262     .enable_cnt(enable_cnt),
263     .ld_max_cnt(ld_max_cnt),
264     .enable_cnt_weight(enable_cnt_weight),
265     .ld_max_cnt_weight(ld_max_cnt_weight),
266     .ld_weight_page_cnt(ld_weight_page_cnt),
267     .start_value_wm(start_value_wm),
268     .max_cnt_from_cu(max_cnt_from_cu), // it depends on the
          current bitwidt [$clog2(COLUMNS):0]
269     .max_cnt_weight_from_cu(max_cnt_weight_from_cu) //[$clog2(
          ROWS):0]
270     );
271
272
273     `endif
274
275
276
277     `ifdef DUMMY
278     always @(posedge(clk)) begin
279     if(reset_i) begin
280     input_data_from_fifo<=0;
281     weight_from_memory<=0;
282     end else begin
283               if (enable_load_array && infifo_read ) begin
```

```
284             input_data_from_fifo<=infifo_dout;
285             weight_from_memory<= wm_dout;
286             end
287
288   end
289   end
290   // dummy assignment for 3 columns and rows
291   assign outfifo_din=( outfifo_write ? input_data_to_fifo:64'
         b0);
292
293
294   `endif
295
296   // same clock for bram interface
297   assign csr_clk=clk;
298   assign wm_clk=clk;
299
300 endmodule
```

C

Results for different frequencies

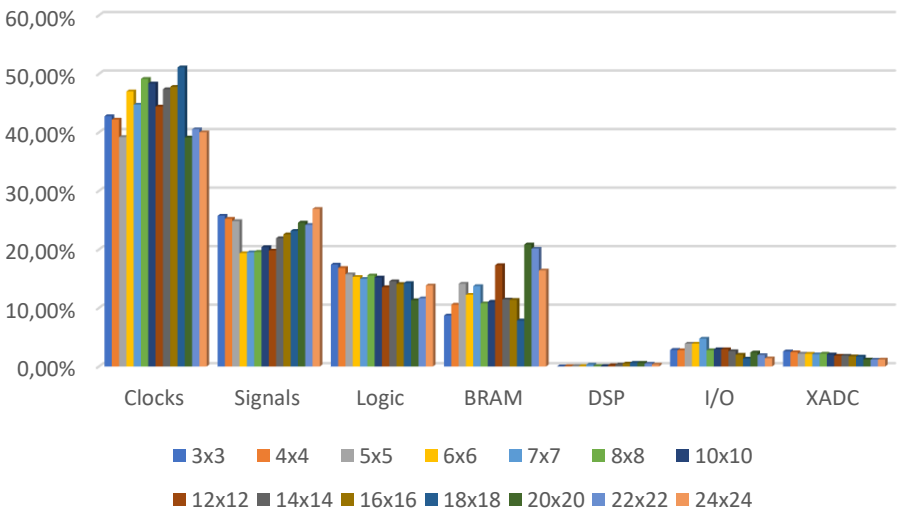

Figure C.1: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 50 MHz and integer 8 PEs

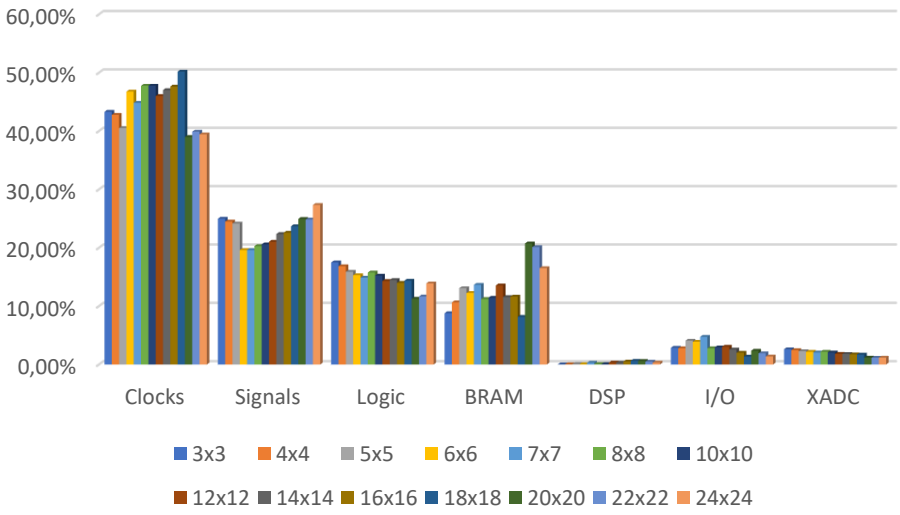

Figure C.2: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 80 MHz and integer 8 PEs

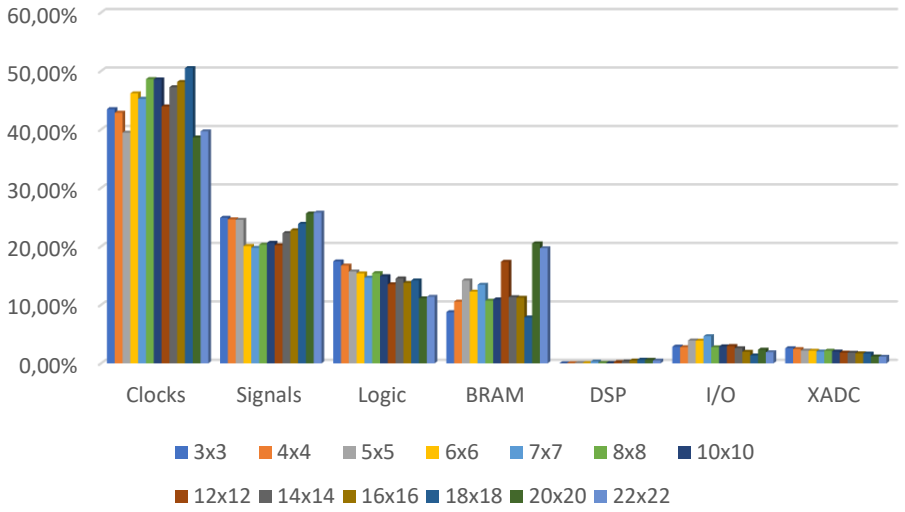

Figure C.3: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 100 MHz and integer 8 PEs

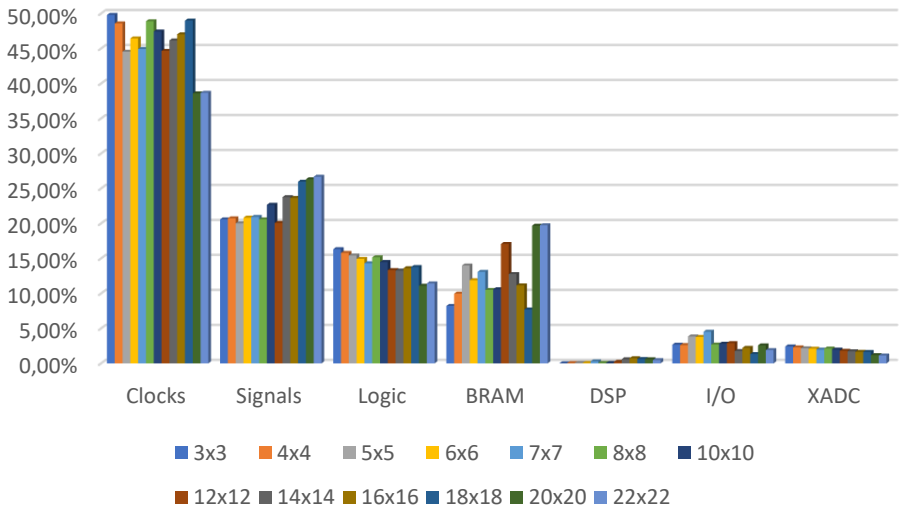

Figure C.4: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 120 MHz and integer 8 PEs

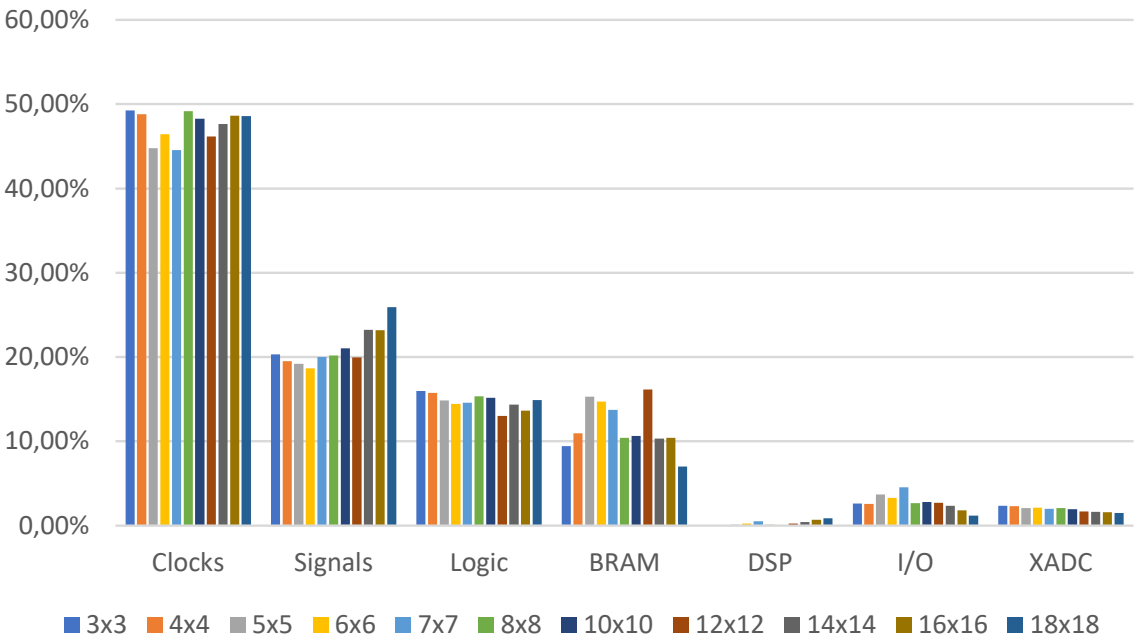

Figure C.5: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 50 MHz and integer 16 PEs

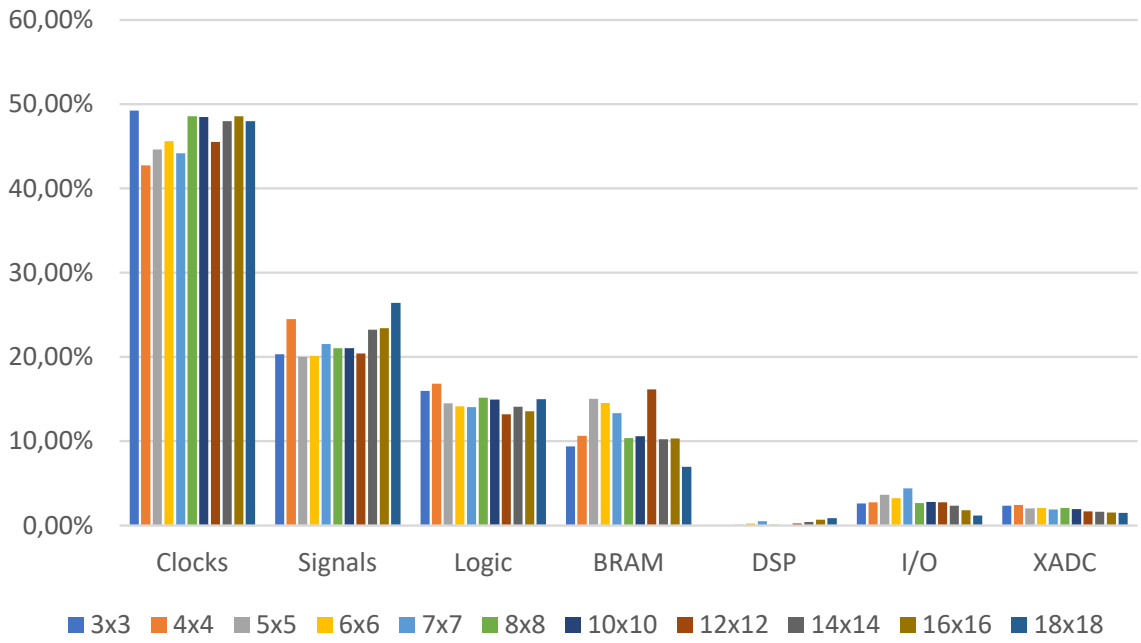

Figure C.6: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 80 MHz and integer 16 PEs

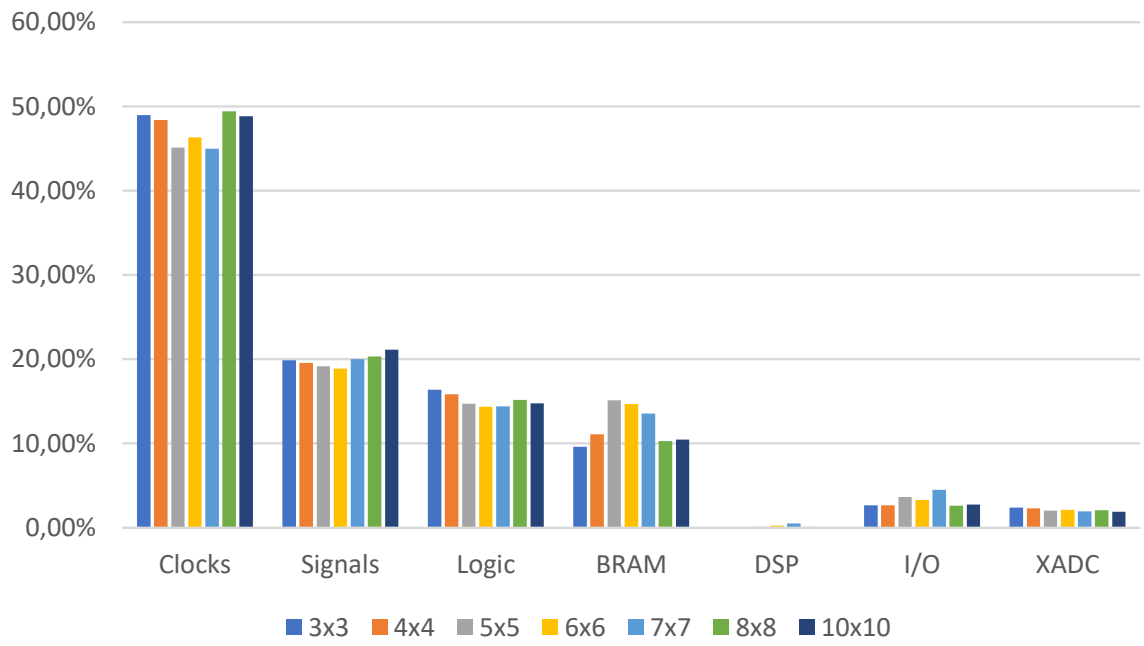

Figure C.7: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 100 MHz and integer 16 PEs

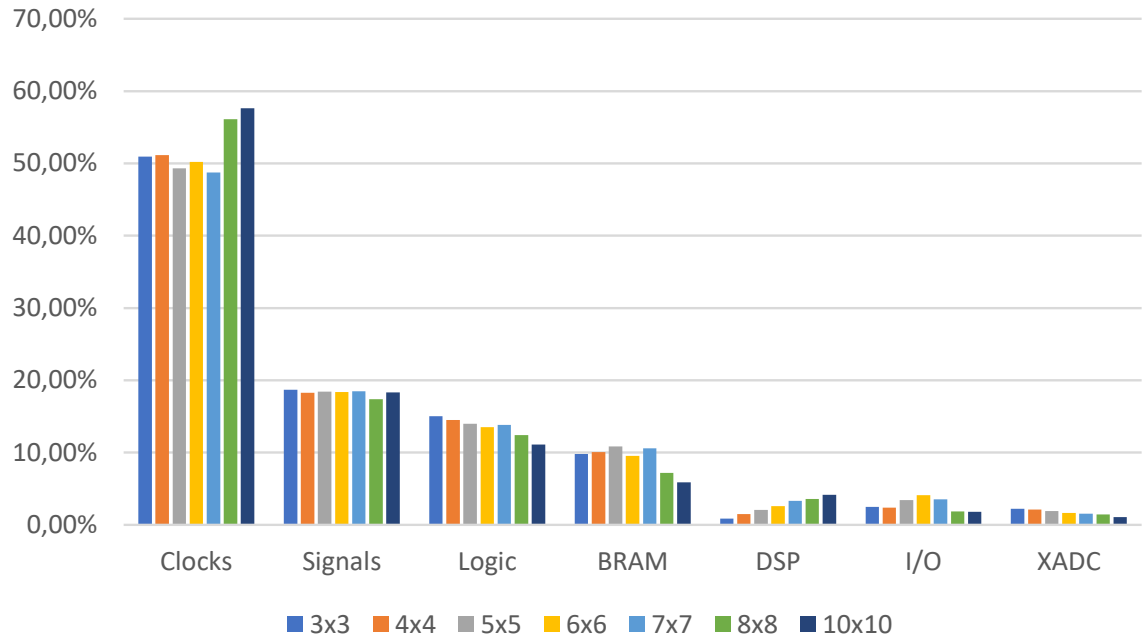

Figure C.8: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 50 MHz and integer 32 PEs

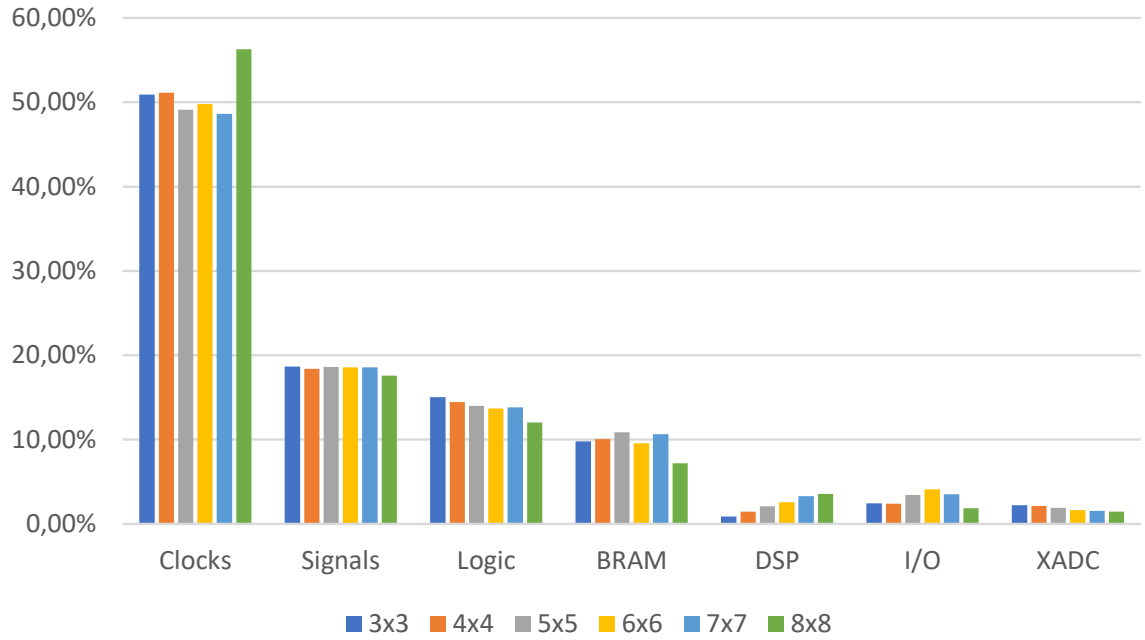

Figure C.9: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 80 MHz and integer 32 PEs

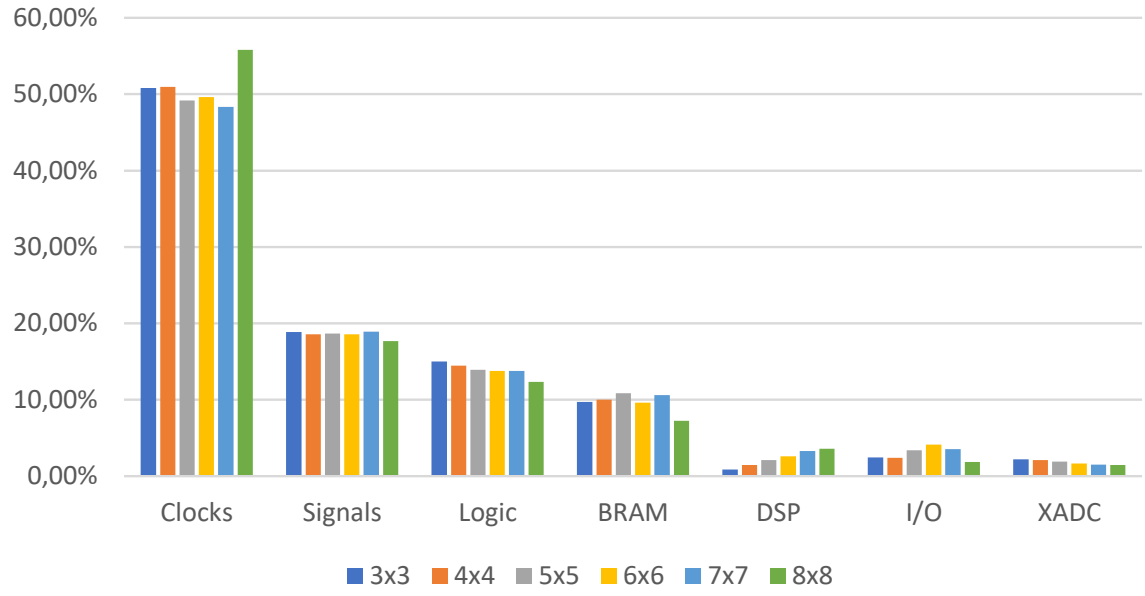

Figure C.10: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 100 MHz and integer 32 PEs

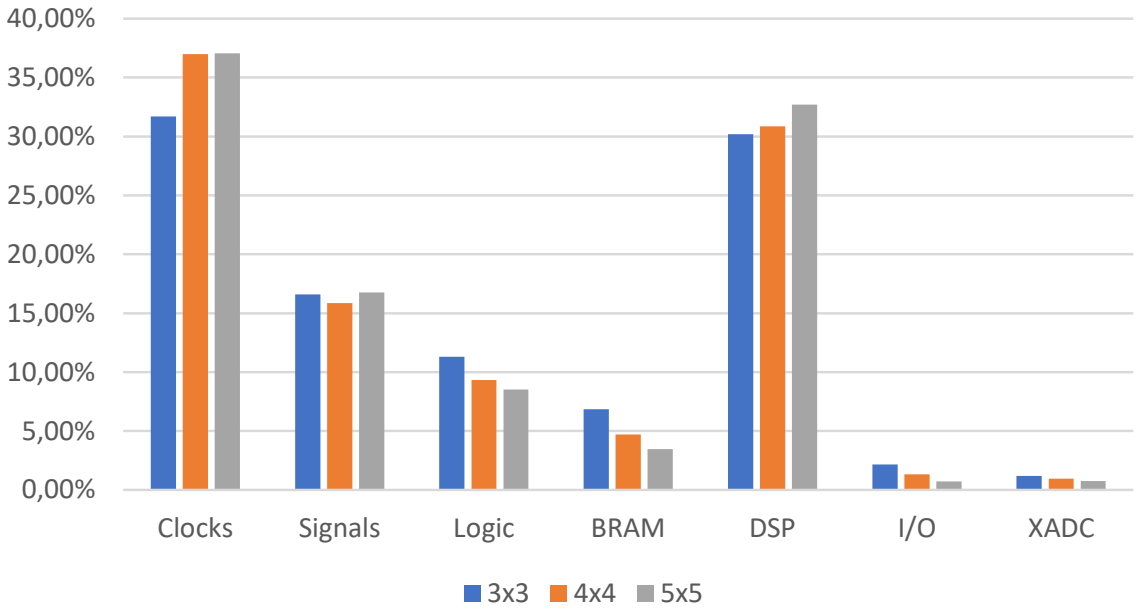

Figure C.11: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 50 MHz and integer 64 PEs

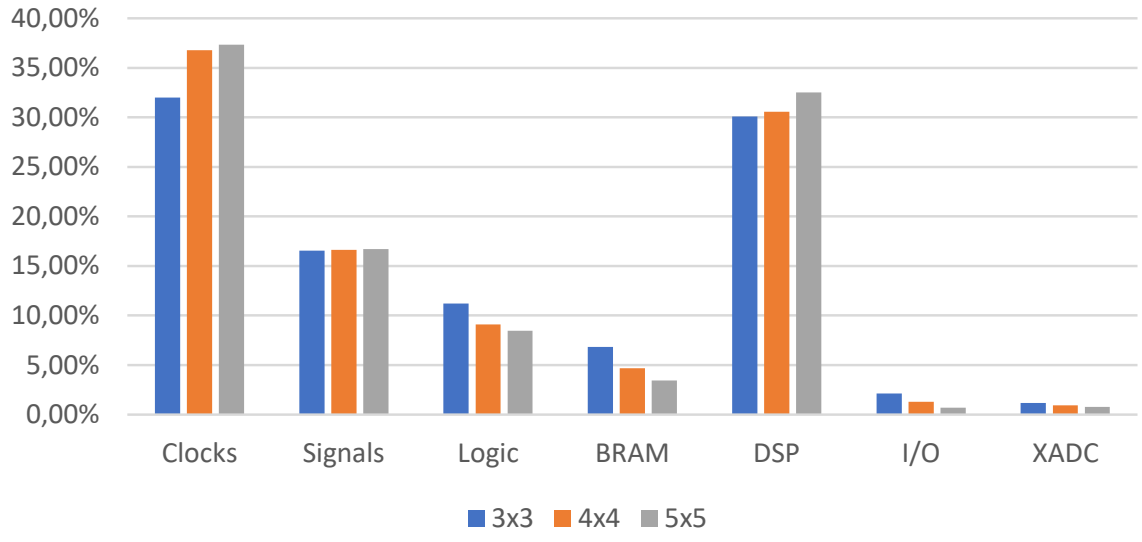

Figure C.12: Post Implementation Dynamic Power Consumption per entities in Programmable Logic with a clock frequency of 60 MHz and integer 64 PEs