

Q Multi-Point lock DB PZ 92mm vz


greenteQ Multi-Point lock for front doors and side entrances made of plastic or aluminium.

Properties:

greenteQ offers a wide range of high-quality, lever-handle-operated multi-point locks with additional latches for front doors and side entrances made of plastic or aluminium up to 60 kg. A high level of basic security is ensured, not just by the stable main lock with a latch and a locking bolt featuring saw-through resistance, but also by means of steel pin reinforcement. The latch and locking bolt are made from die-cast zinc; the latch has been galvanised and the locking bolt nickel-plated. The additional latches with 4 mushroom rollers or 2 round bolts ensure additional security, allow the door to be tightened powerfully and prevent

it from being pried open. The dimensions and security requirements have been tested in accordance with DIN 18251-3. The greenteQ multi-point locks have been preconfigured for installing all profile cylinders certified in accordance with DIN 18252 or EN 1303. The main and additional locking parts are handle operated and ensure an user-friendly mechanism with a built-in oil duct for lubrication. You will also find a profile-based list of all main and ancillary strike plates below.

Product picture and technical drawing:

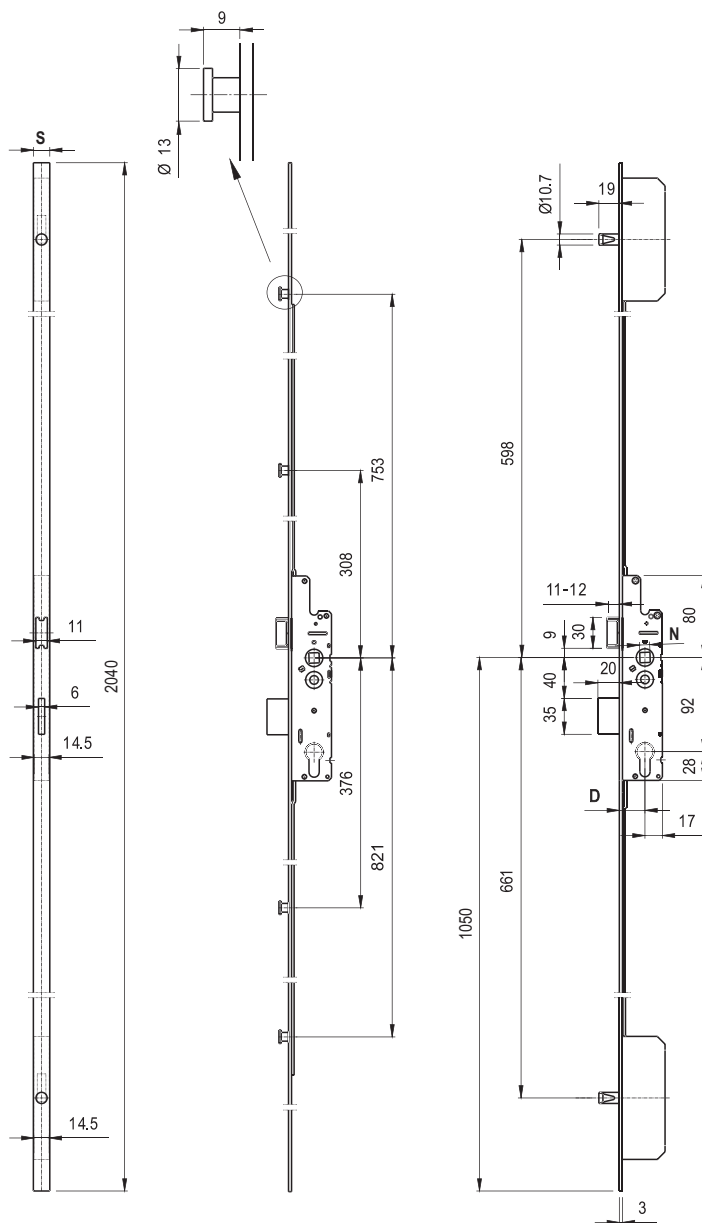

D = backset	S = face plate width	N = follower
35 / 45 / 65	16 / 20 x 3	8 / 10

PRODUCT DATA SHEET

DOOR HARDWARE - Multi-Point lock DB PZ 92mm vz

Instructions for use, performance and product data, and all other technical data for greenteQ products are general guidelines only. They describe the performance characteristics and material composition of our products. However, they constitute no guarantee according to § 443 BGB. Due to the various application possibilities it is the user's sole responsibility to satisfy himself that the product is adequate for his intended purpose. Any technical consultation with VBH, whether verbal, written or in the form of test samples is for your information only and is absolutely non-committal.

greenteQ

Edition 04/2012 | www.vbh.de

greenteQ Multi-Point lock DB PZ 92mm vz

greenteQ Multi-Point lock for front doors and side entrances made of plastic or aluminium.

Technical data:



Face plate material	Galvanised steel (high corrosion resistance)
Lockcase material	Galvanised steel (high corrosion resistance)
Mushroom roller material	Galvanised steel (high corrosion resistance)
Round bolt material	Galvanised steel (high corrosion resistance)
Operation	lever handle operated
Operation locking	4 mushroom rollers / 2 round bolts
Bolt extension	20 mm (2-way)
Latch	DIN RS and LS usable
Bolt	Saw-through resistance
Adjustable mushroom rollers	+/- 2 mm
Locking	Preconfigured for profile cylinders, acc. to DIN 18252 / EN 1303
Packaging unit	5 pieces



greenteQ Multi-point lock lever handle operated:

Name	Variant	VBH Item-Number
greenteQ MFV F16/35/92/8 PZ P4 DB vz	lever handle operated, 4 mushroom rollers	396.415 / 6500
greenteQ MFV F16/45/92/8 PZ P4 DB vz	lever handle operated, 4 mushroom rollers	396.416 / 6500
greenteQ MFV F20/65/92/10 PZ P4 DB vz	lever handle operated, 4 mushroom rollers	396.417 / 6500
greenteQ MFV F16/35/92/8 PZ B2 DB vz	lever handle operated, 2 round bolts	396.418 / 6500
greenteQ MFV F16/45/92/8 PZ B2 DB vz	lever handle operated, 2 round bolts	396.419 / 6500
greenteQ MFV F20/65/92/10 PZ B2 DB vz	lever handle operated, 2 round bolts	396.420 / 6500

greenteQ

DOOR HARDWARE - Multi-Point lock DB PZ 92mm vz | Edition 04/2012 | www.vbh.de

Instructions for use, performance and product data, and all other technical data for greenteQ products are general guidelines only. They describe the performance characteristics and material composition of our products. However, they constitute no guarantee according to § 443 BGB. Due to the various application possibilities it is the user's sole responsibility to satisfy himself that the product is adequate for his intended purpose. Any technical consultation with VBH, whether verbal, written or in the form of test samples is for your information only and is absolutely non-committal.


Q Multi-Point lock DB PZ 92mm vz

greenteQ Multi-Point lock for front doors and side entrances made of plastic or aluminium.

Accessories:



greenteQ MIDDLE LOCKING PLATES

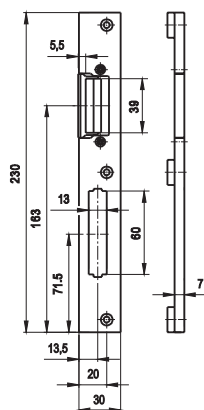

PROFILE SYSTEM	Type 1 vz		Type 2 vz		Type 3 vz		Type 4 vz		Type 5 vz		Type 6 vz		Type 7 vz	
	rs 397.220/4012	ls 397.220/4011	rs 397.316/4012	ls 397.316/4011	rs 397.317/4012	ls 397.317/4011	rs 397.318/4012	ls 397.318/4011	rs 397.319/4012	ls 397.319/4011	rs 397.320/4012	ls 397.320/4011	rs 397.321/4012	ls 397.321/4011
Aluplast Ideal 2000 AD			X	X										
Aluplast Ideal 2000 AD (Side entry door)			X	X										
Aluplast Ideal 4000 AD	X	X												
Aluplast Ideal 4000 AD (Side entry door)	X	X												
Gealan S7000 IQ (Side entry door) 5K					X	X								
Gealan S8000 IQ					X	X								
Gealan S8000 IQ (Side entry door)					X	X								
KBE AD 70mm System (Side entry door)					X	X								
KBE MD 70 (Side entry door)					X	X								
Kömmerling 88 plus (MD)													X	X
Kömmerling 88 plus (MD) (Side entry door)													X	X
Kömmerling EuroFutur Classic													X	X
Kömmerling EuroFutur Classic (Side entry door)													X	X
LB-Profile PAD			X	X										
Rehau Geneo							X	X						
Rehau Brilliant-Design (Side entry door)							X	X						
Rehau Thermo Design (S730)							X	X						
Salamander Design 2D (Side entry door)									X	X				
Schüco Corona AS 60	X	X												
Schüco Corona CT 70 AS											X	X		
Schüco Corona CT 70 AS (Side entry door)											X	X		
Schüco Corona SI 82 (Side entry door)											X	X		
Veka Alphaline 90 MD (Side entry door)			X	X										
Veka Softline AD 70 (Side entry door)			X	X										
Veka Softline MD (Side entry door)			X	X										
Veka Topline AD (Side door entry) (Frame: 104mm)			X	X										

greenteQ

DOOR HARDWARE - Multi-Point lock DB PZ 92mm vz | Edition 04/2012 | www.vbh.de

Instructions for use, performance and product data, and all other technical data for greenteQ products are general guidelines only. They describe the performance characteristics and material composition of our products. However, they constitute no guarantee according to § 443 BGB. Due to the various application possibilities it is the user's sole responsibility to satisfy himself that the product is adequate for his intended purpose. Any technical consultation with VBH, whether verbal, written or in the form of test samples is for your information only and is absolutely non-committal.


Q Multi-Point lock DB PZ 92mm vz

greenteQ Multi-Point lock for front doors and side entrances made of plastic or aluminium.

Accessories:



greenteQ ADDITIONAL STRIKING PLATE FOR MUSHROOM ROLLER

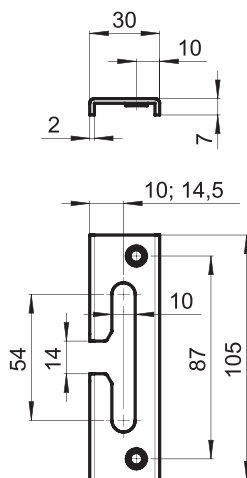

PROFILE SYSTEM	Type 1 vz 398.120/4010	Type 2 vz 398.121/4010	Type 3 vz 398.122/4010	Type 4 vz 398.123/4010	Type 5 vz 398.124/4010	Type 6 vz 398.125/4010	Type 7 vz 398.126/4010
Aluplast Ideal 2000 AD		X					
Aluplast Ideal 2000 AD (Side entry door)		X					
Aluplast Ideal 4000 AD	X						
Aluplast Ideal 4000 AD (Side entry door)	X						
Gealan S7000 IQ (Side entry door) 5K			X				
Gealan S8000 IQ			X				
Gealan S8000 IQ (Side entry door)			X				
KBE AD 70mm System (Side entry door)			X				
KBE MD 70 (Side entry door)							
Kömmerring 88 plus (MD)							X
Kömmerring 88 plus (MD) (Side entry door)							X
Kömmerring EuroFutur Classic							X
Kömmerring EuroFutur Classic (Side entry door)							
LB-Profile PAD		X					
Rehau Geneo				X			
Rehau Brilliant-Design (Side entry door)				X			
Rehau Thermo Design (S730)				X			
Salamander Design 2D (Side entry door)					X		
Schüco Corona AS 60	X						
Schüco Corona CT 70 AS						X	
Schüco Corona CT 70 AS (Side entry door)						X	
Schüco Corona SI 82 (Side entry door)						X	
Veka Alphaline 90 MD (Side entry door)							
Veka Softline AD 70 (Side entry door)		X					
Veka Softline MD (Side entry door)		X					
Veka Toplevel AD (Side door entry) (Frame: 104mm)		X					

greenteQ

DOOR HARDWARE - Multi-Point lock DB PZ 92mm vz | Edition 04/2012 | www.vbh.de

Instructions for use, performance and product data, and all other technical data for greenteQ products are general guidelines only. They describe the performance characteristics and material composition of our products. However, they constitute no guarantee according to § 443 BGB. Due to the various application possibilities it is the user's sole responsibility to satisfy himself that the product is adequate for his intended purpose. Any technical consultation with VBH, whether verbal, written or in the form of test samples is for your information only and is absolutely non-committal.