

FLASH HINGE

00150N

Functions

LH/RH adjustable hinge for aluminium frame open joint doors and windows.


Featuring the same rugged construction and high precision as conventional GIESSE hinges, the Flash hinge can be installed very rapidly on unassembled and assembled frames.

Finish

Natural, Anodized silver, bronze and polished gold, Elettrogiesse 5/9, Painted in RAL colours

Packaging

Box of 50 units

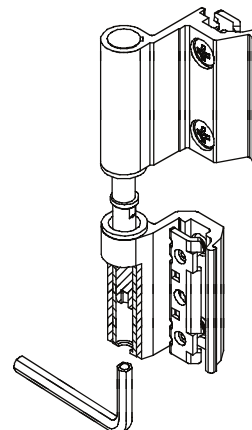

Technical features

This hinge is equipped with an eccentric pin offering 0.3 mm compression and clearance adjustment.

The forged stainless steel burglar-proof pin is equipped with a central collar that prevents withdrawal in the case of attempted intrusion.

The FLASH hinge features the GIESSE-RAPID fixing system and is supplied pre-assembled.

The shape of the hinge and plate makes for practical and rapid installation on pre-assembled frames and ensures the hinge remains correctly positioned while the screws are tightened.

Parts

2 fixing plates

4 stainless steel M5x10 oval head c/sunk crosshead screws

Materials

Hinge in extruded aluminium

Stainless steel pin, screws and plates




Black nylon bushes

Capacities

With 2 FLASH hinges: 75 kg

With 3 FLASH hinges: 85 kg

Calculated for h 2000 mm
x 1000 mm doors / windows

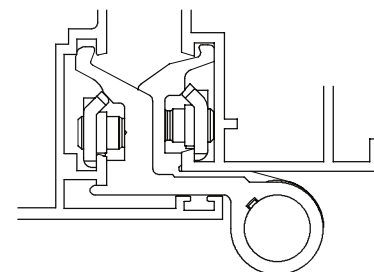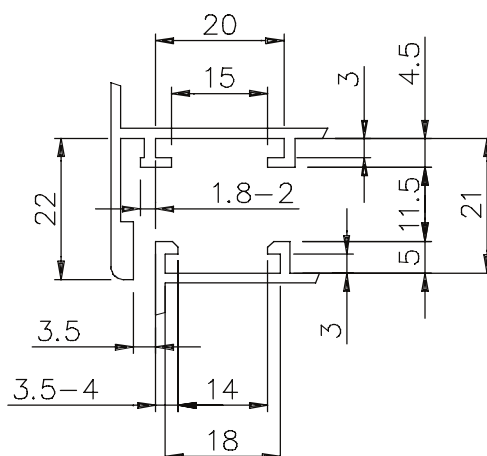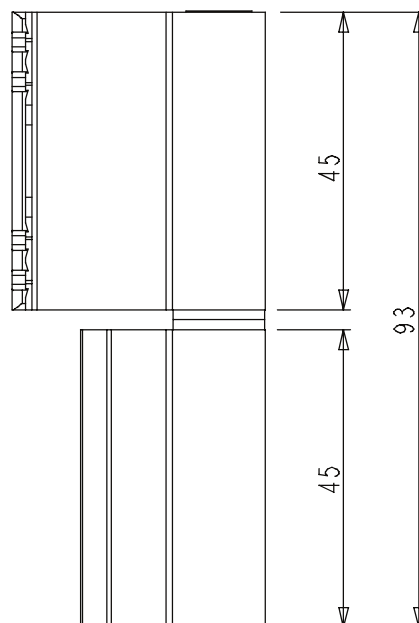

Mainly used with the following series:

SEE THE INDEX OF ACCESSORIES AND THEIR USE ON THE VARIOUS PROFILE SECTIONS