Automatic and optimized firewall reconfiguration

F. Pizzato, D. Bringhenti, R. Sisto, F. Valenza

ITASEC, 10th April 2024

Politecnico di Torino
1859
netgroup
DAUIN

Network Configuration Updates

Updates are **frequent** and (often) **small**:

- <1% affected forwarding rules and ACL rules [1]
- 157 configuration lines on Facebook's network with a frequency of 12 changes/week (per device!) [2]

[1] D. Plonka and A. J. Tack, "*An Analysis of Network Configuration Artifacts*", Proc. of 23rd Large Installation System Administration Conference, USENIX Association, 2009
[2] Y.-W. E. Sung et al., "*Robotron: Top-down network management at Facebook scale*," in Proc. of the 2016 ACM SIGCOMM Conference, ser. SIGCOMM '16. New York, NY, 2016

Network Security Automation

Network Security Automation [3] is **necessary** to:

- Effectively manage complex networks
- Avoid trial-and-error and human involvement
- Additional features:
  - *Policy-based management*
  - *Formal verification*
  - *Optimization*

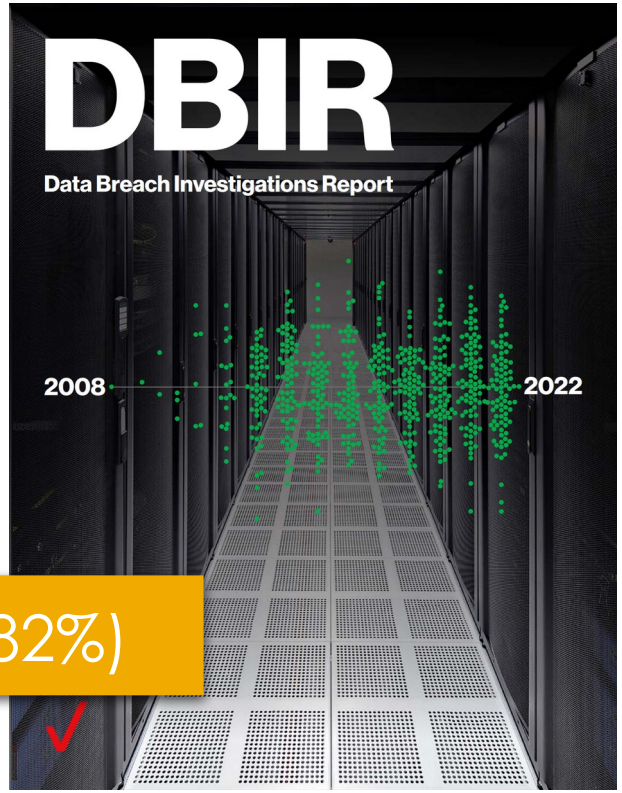

Human error (82%)

[3] D. Bringhenti, G. Marchetto, R. Sisto, and F. Valenza, "*Automation for network security configuration: State of the art and research trends*," ACM Comput. Surv., vol. 56, no. 3, pp. 57:1–57:37, 2024

The Existing Approach

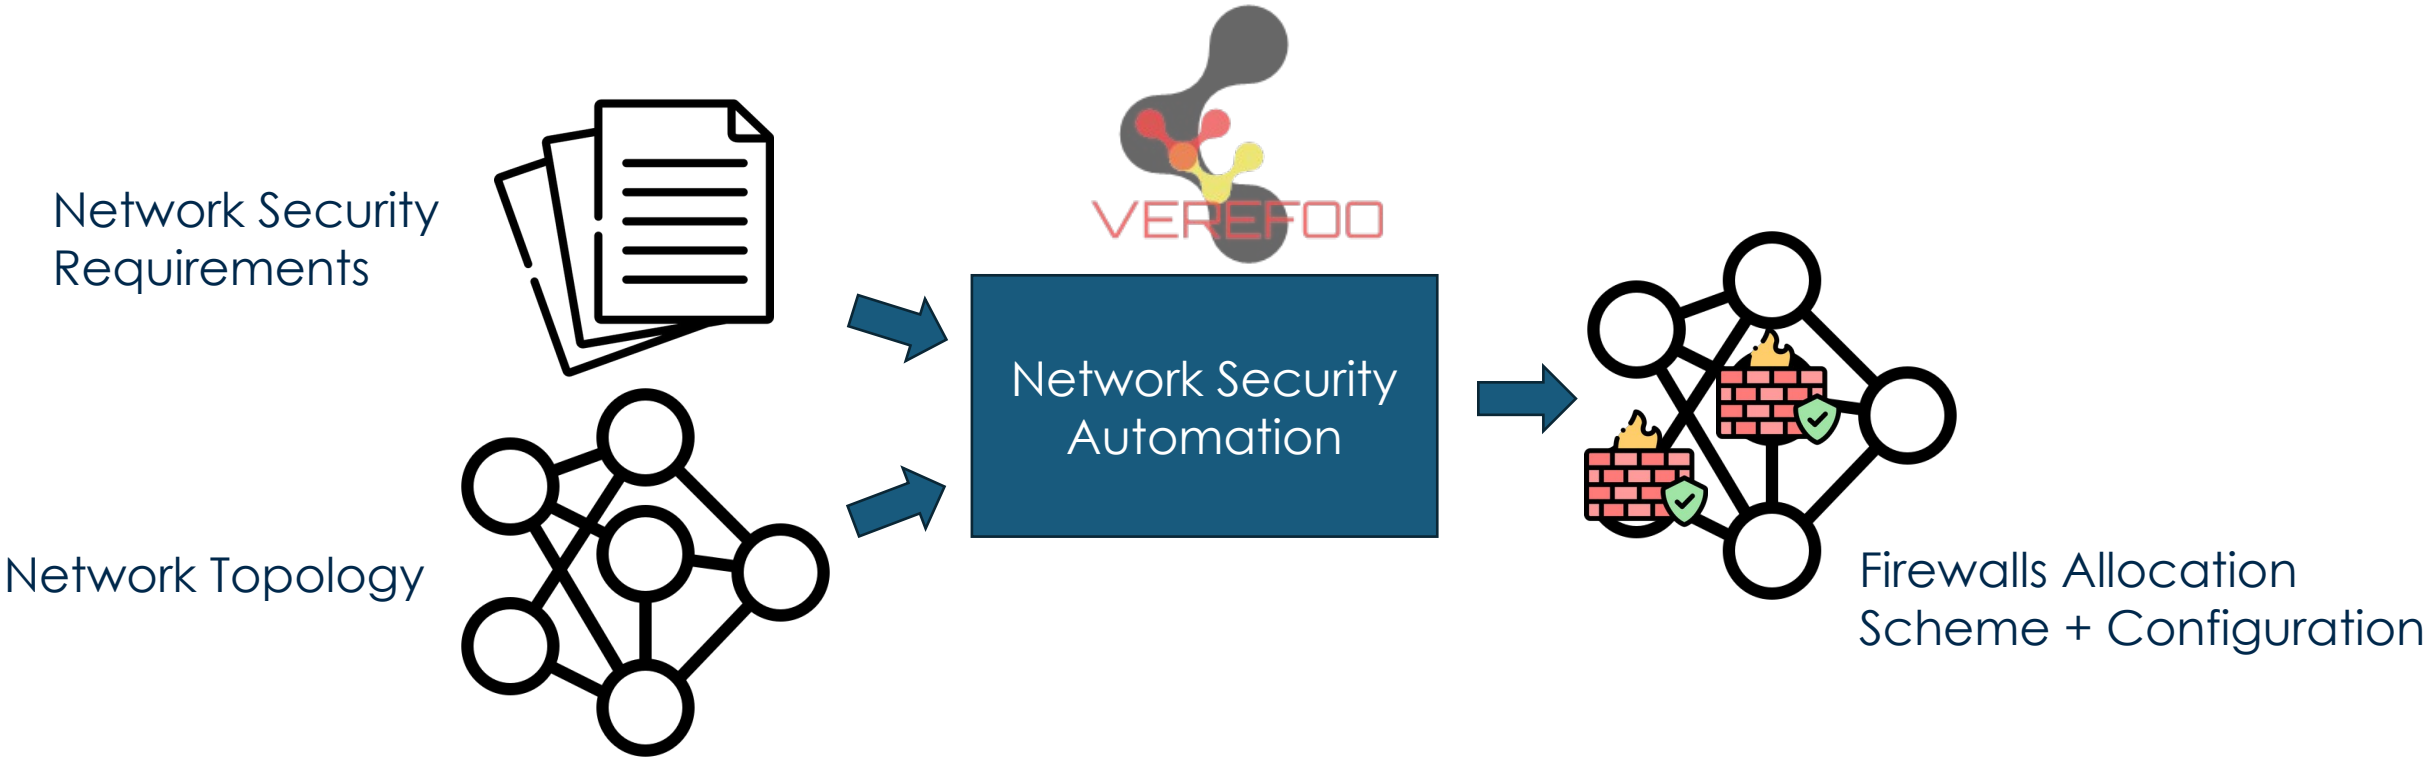

The Existing Approach

UPDATED
Network Security Requirements

Network Topology

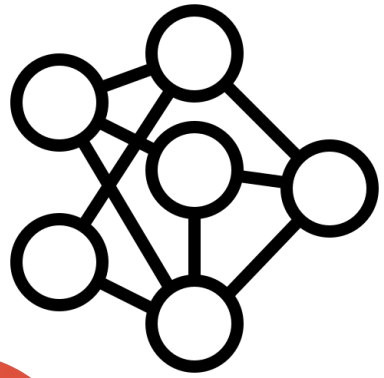

Network Security Automation

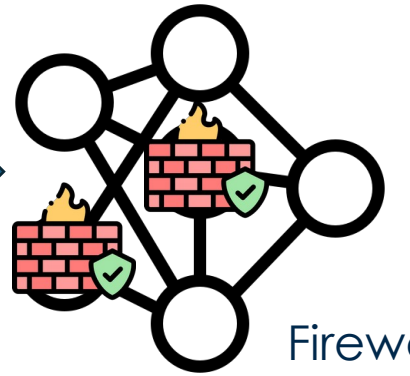

Firewalls Allocation Scheme + Configuration

When policies are updated (e.g., to mitigate an attack) the configuration of whole network must be recomputed **from scratch**

Contributions

Automated approach for the *optimal* **reconfiguration** of distributed firewalls

- within a short computation time
- (formally) satisfying a **new set of Network Security Requirements** (NSRs)

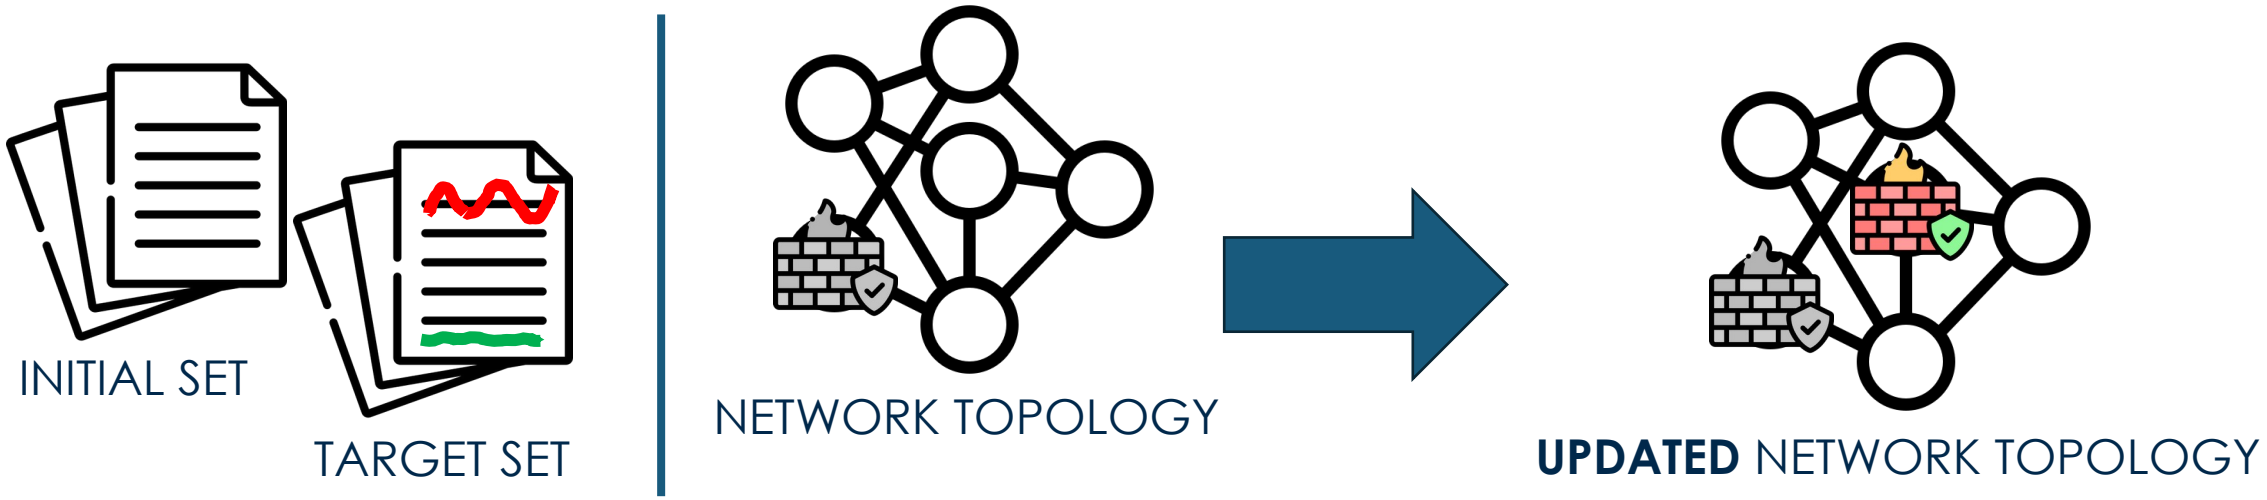

Problem Inputs

- (partially configured) **Network Topology** + **two sets of NSRs**

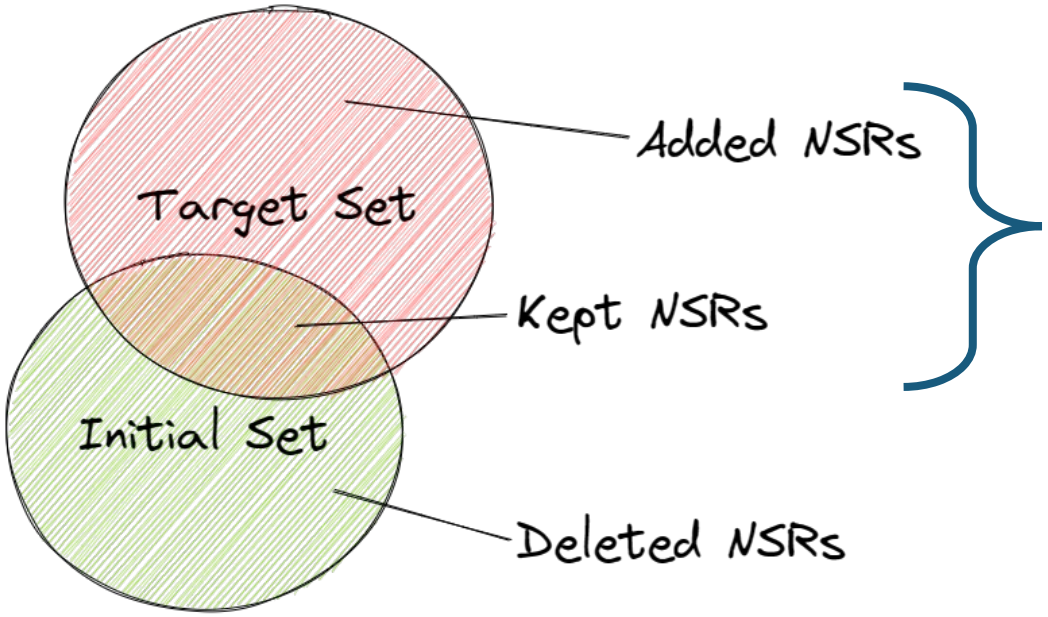

- Elements to reconfigure are selected starting from the *Added NSRs* (either new requirements or updated ones).
- Problem models *Added NSRs + Kepts NSRs* to ensure their satisfaction within the solution.

MaxSMT problem

A Maximum Satisfiability Modulo Theories (**MaxSMT**) problem differs from an SMT one because it allows the definition of two clauses:

- *Hard constraints* - compulsory
- *Soft constraints* – optional and with an associated weight

Optimization's criteria



NSRs

Hard Constraint

- Hard constraints are used to express NSRs.
- Working with packet filtering FWs, we model <u>connectivity requirements</u>:

Reachability

$$\exists f \in F_r . \forall i \left(n_i \in \pi(f) \wedge allocated(n_i) \Rightarrow \neg deny_i(\tau(f, n_i)) \right)$$

Isolation

$$\forall f \in F_r . \exists\, i . \left(n_i \in \pi(f) \wedge allocated(n_i) \wedge deny_i(\tau(f, n_i)) \right)$$

Algorithm

- Finds all network elements to reconfigure because in conflict with at least a new NSR. Custom logic for each type, i.e., Isolation or Reachability.
- Novel algorithm to select the **minimum** network area that must be reconfigured; other configuration components are kept as static elements.
- Uses an efficient traffic flow representation (i.e., *Atomic Flows*) to isolate traffics affected by the NSRs update.
- Only selected elements are recomputed, **reducing the solution space**!

Soft Constraint

- Soft constraints are used for optimization. The two goals are:
  - *Resource minimization (i.e., number of FWs and FW rules)*
  - *Configuration state preservation*

- **Allocation** Soft Constraint

$$\forall k \mid a_k \in A_A.Soft(allocated(a_k) = false, c_k)$$

- **Configuration** Soft Constraint

$$\forall i \mid p_i \in P_k.Soft(configured(p_i) = false, c_{ki})$$

For each reconfigured FW, the previous have different weights to favor their allocation/configuration.

$$c_k^R, c_{ki}^R \mid (c_k^R < c_k) \wedge (c_{ki}^R < c_{ki})$$

Validation - Performance

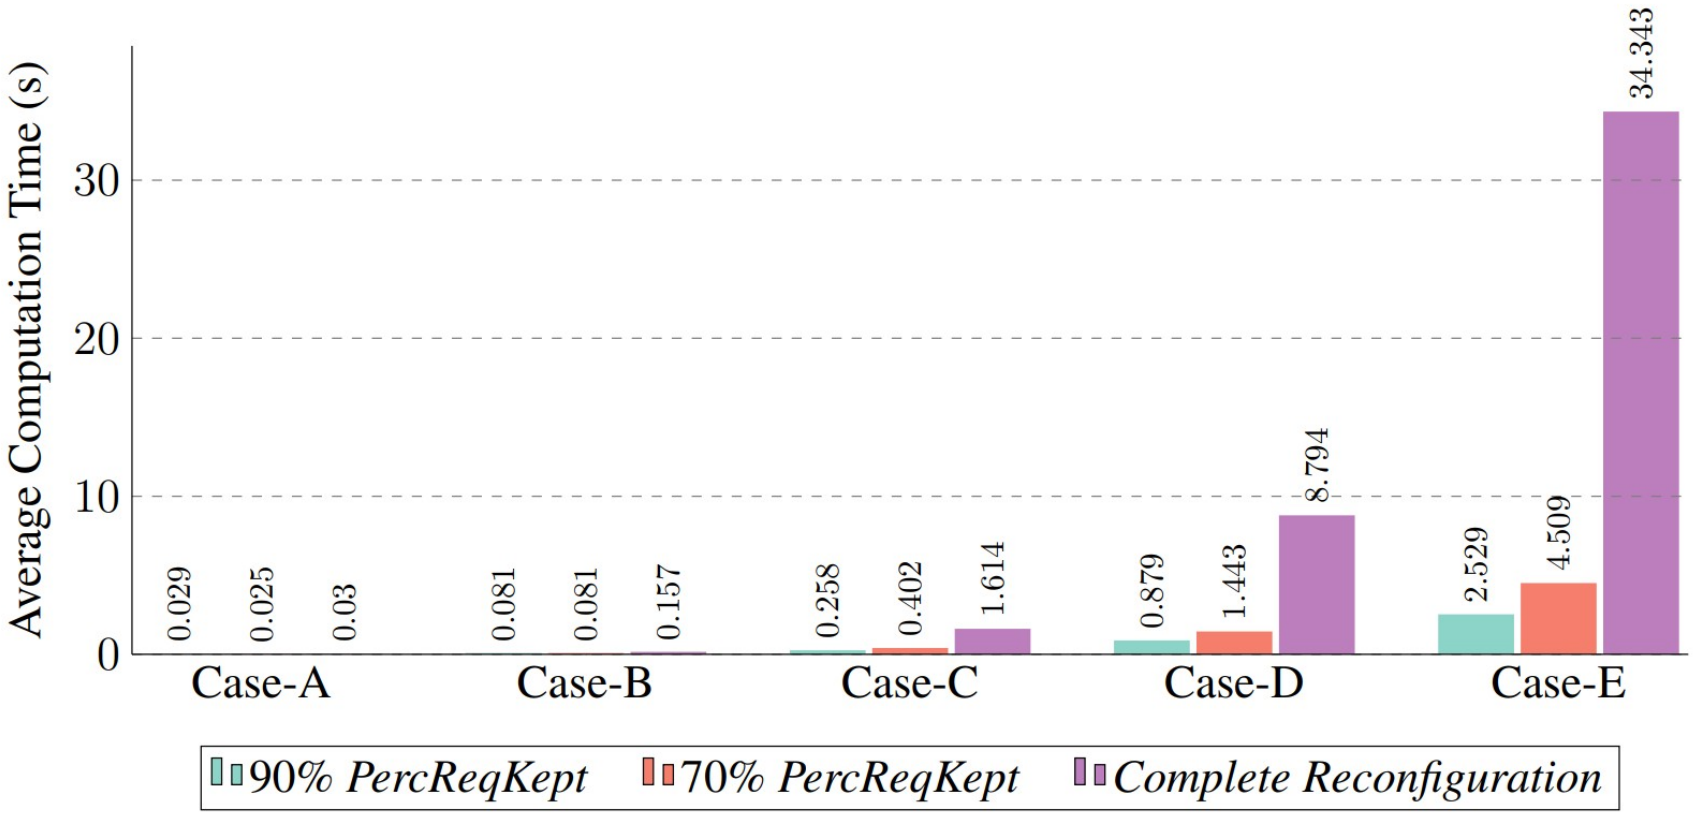

case-A: 10 NSRs, 60 endpoints, 5 NATs
case-B: 15 NSRs, 80 endpoints,10 NATs
case-C: 20 NSRs, 100 endpoints, 15 NATs
case-D: 25 NSRs, 120 endpoints, 20 NATs
case-E: 30 NSRs, 140 endpoints, 25 NATs

Validation – Optimality

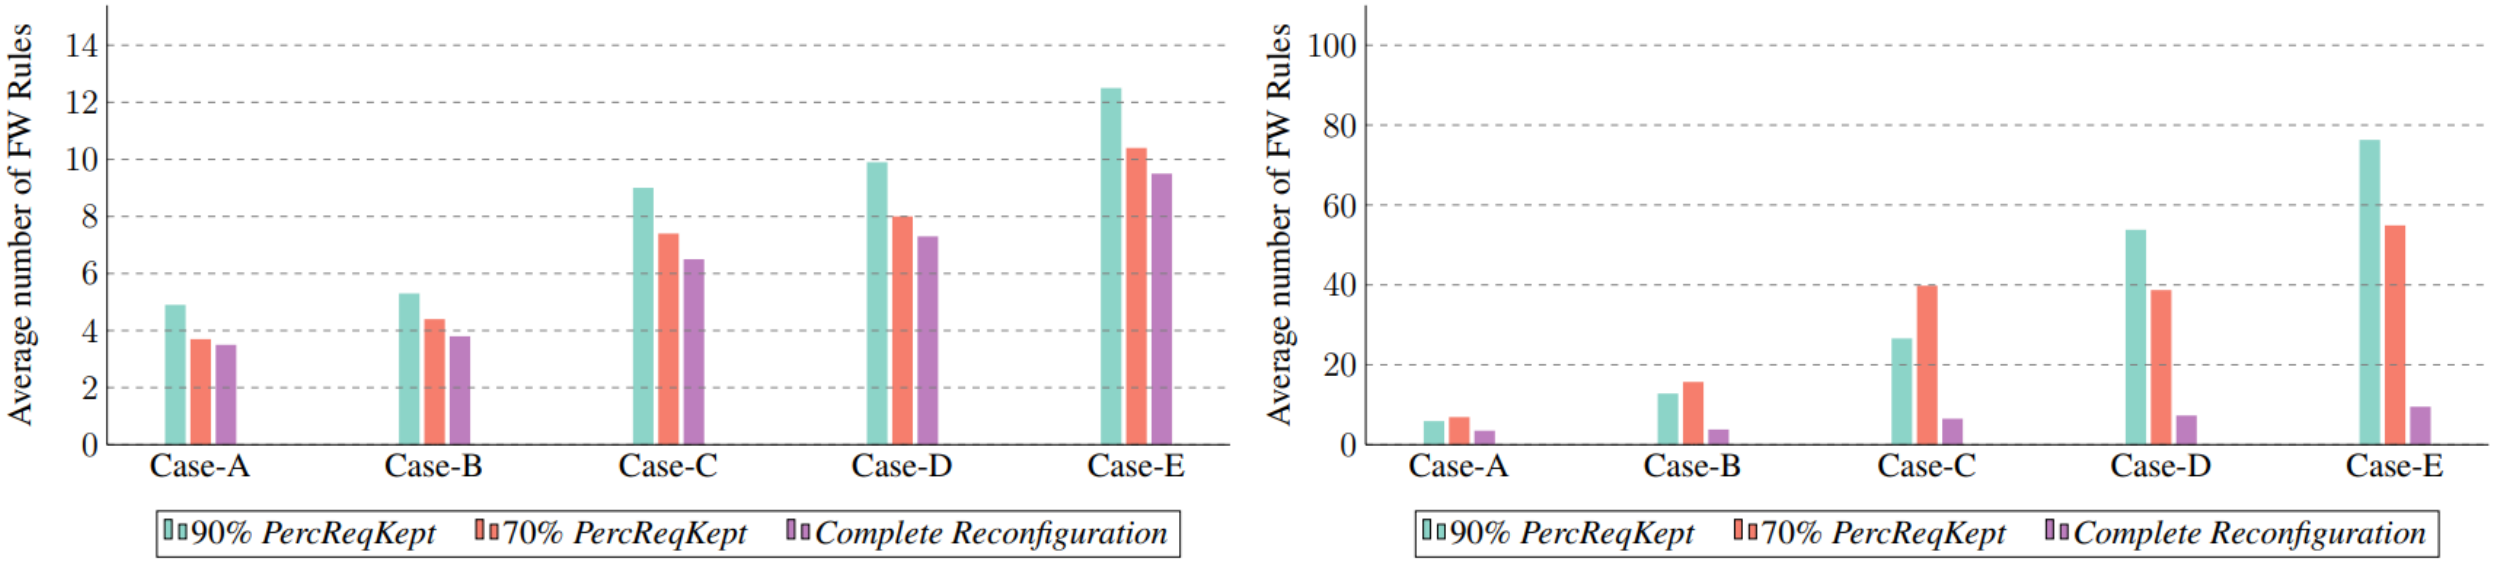

(a) Results with ratio 2

(b) Results with ratio 10

- Ratio used for weights govern the balance between the two optimization objectives.
- With large value, number of used resources steeply increase to meet the goal of configuration state preservation.

Conclusions and Future Work

- A new approach has been proposed to optimize FW reconfiguration, combining **automation**, **formal verification** and **optimization**.
- Achieved better scalability with respect to the state-of-the-art in the reconfiguration scenario.
- We will try to use this work to design a parallelized approach for the resolution of the problem, dividing the network into independent areas that could be configured separately and in parallel.

Thanks for your attention!

Francesco Pizzato

<francesco.pizzato@polito.it>