NOTES

1. Print the PDF at 100 % (actual size) on A4 landscape and check the 50 mm bar.
2. Glue the print on the plate, center-punch the crossings of the center lines, drill the holes, then cut and file the outline.
3. Only aluminum may go under a brake caliper bolt. A printed bracket is a fit check, never a part (chapter 07).
4. The sensor slides in the slot: 48 ± 4 mm from the bolt. Its two M12 nuts set the 1–2 mm gap to the disc bolts.
5. Dimensions in mm, from sensor-bracket.scad. Orange values are [TO VERIFY] on the bike (docs/research/bike-measurements.md): set them in the .scad file and regenerate.

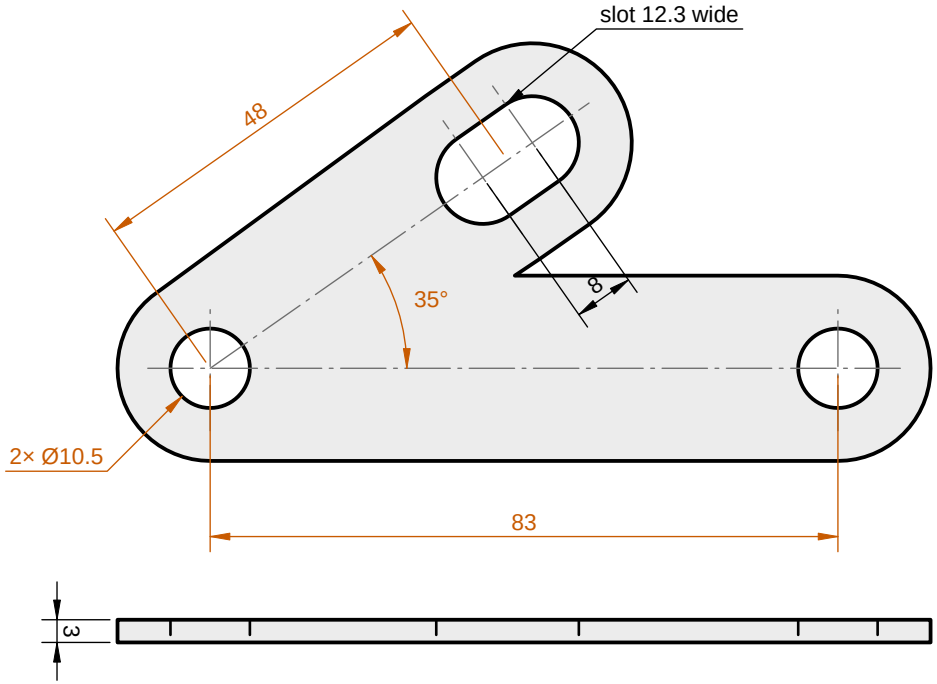

Plate 3 mm, aluminum 5754 or 6082

Print at 100 % (actual size): this bar measures 50 mm

0 10 20 30 40 50 mm

github.com/frascella-dev/tdm-dash · generated by hardware/drawings/generate.py from hardware/bracket/sensor-bracket.scad, do not edit by hand

tdm-dash mechanical parts · Yamaha TDM 850 (3VD) CERN-OHL-P-2.0

Sensor bracket

SCALE	REV	DATE	SIZE
1:1	0.2	2026-10-21	A4