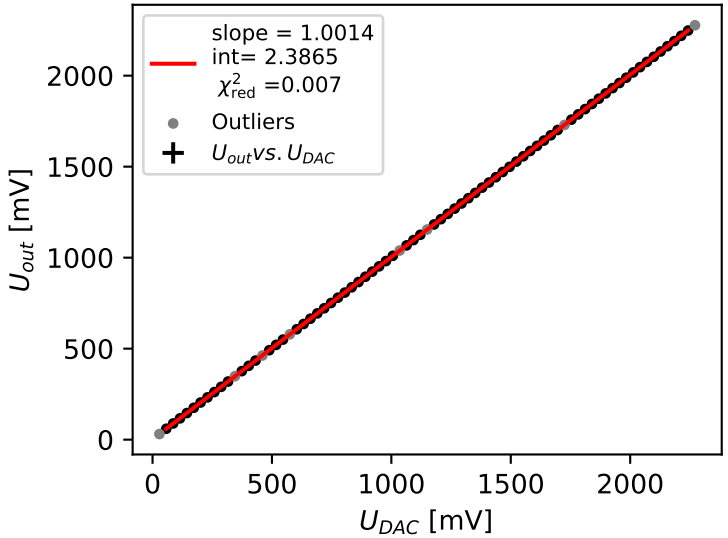

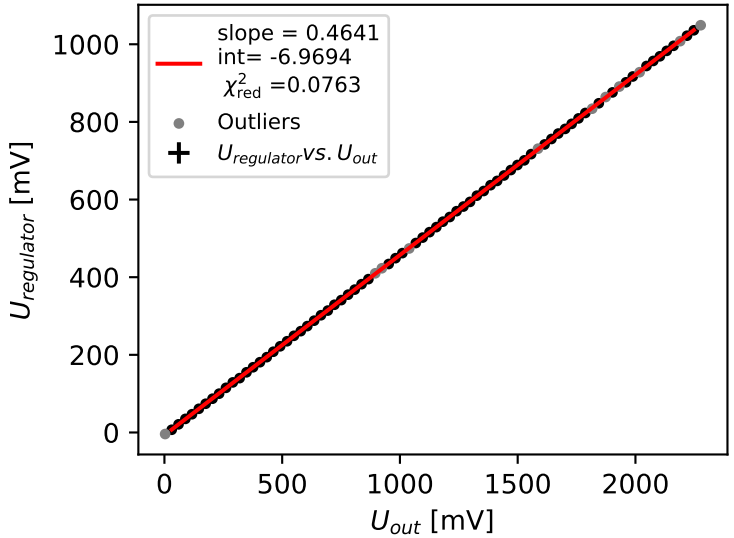

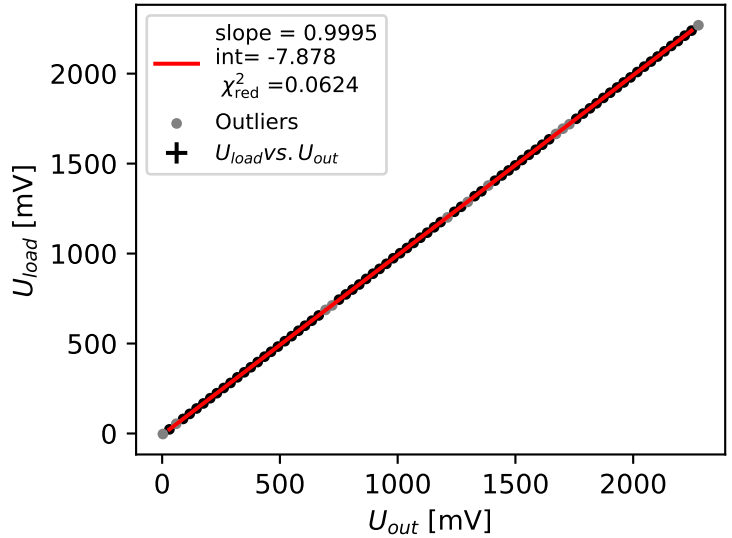

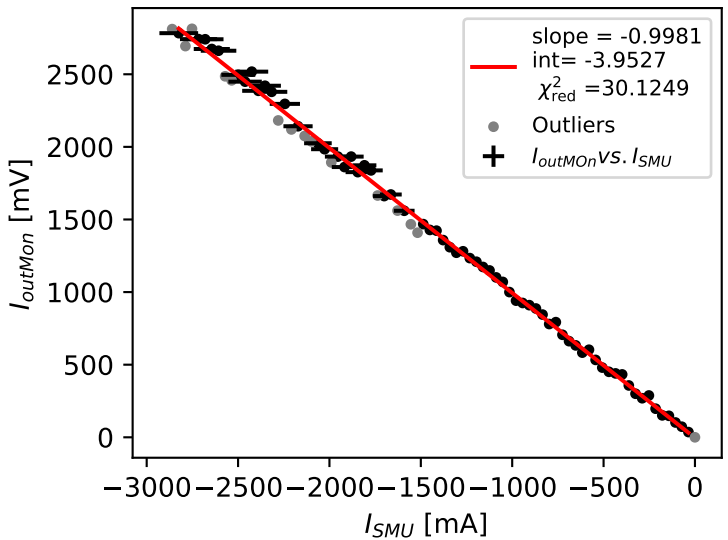

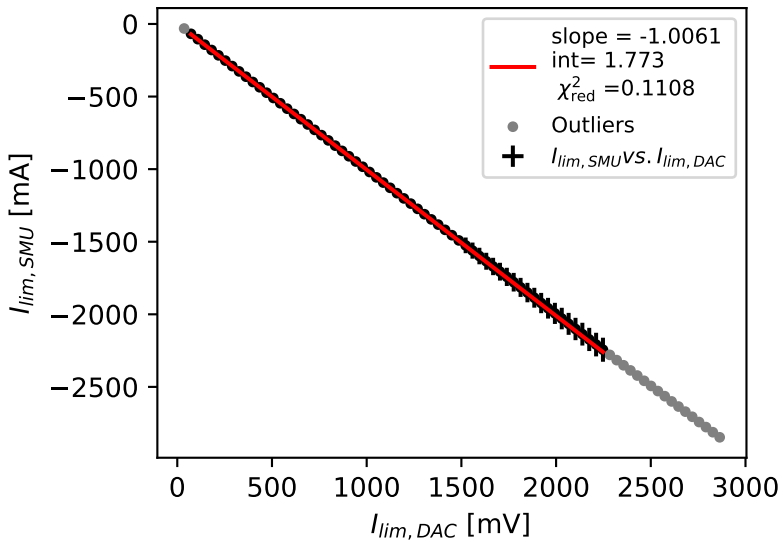

Number of deleted points :

0) U_{out} vs. U_{DAC} : **9**
1) $U_{regulator}$ vs. U_{out} : **11**
2) U_{load} vs. U_{out}: **11**
3) I_{outMON} vs. I_{SMU}: **15**
4) $I_{lim,SMU}$ vs. $I_{lim,DAC}$: **19**

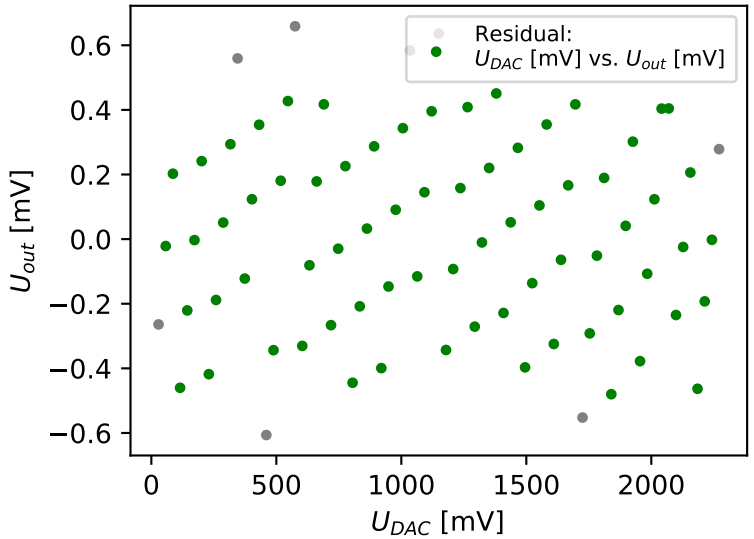
Residual:
U_{DAC} [mV] vs. U_{out} [mV]
U_{out} [mV]
U_{DAC} [mV]

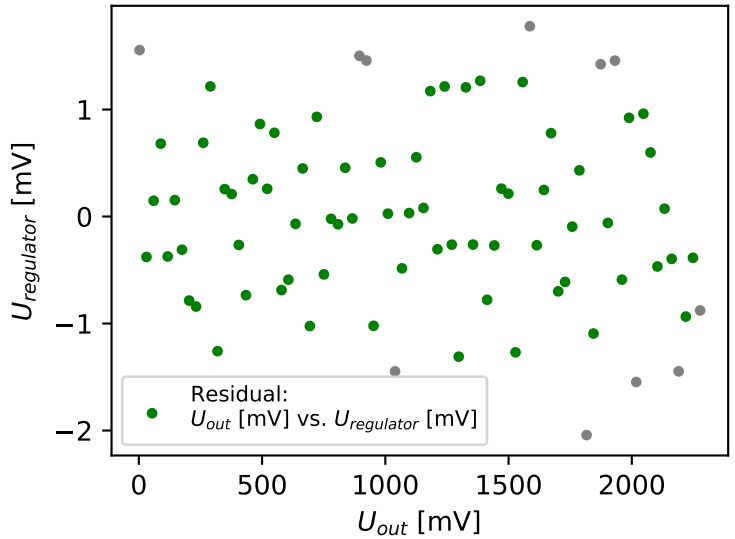
Residual:
U_{out} [mV] vs. $U_{regulator}$ [mV]
$U_{regulator}$ [mV]
U_{out} [mV]

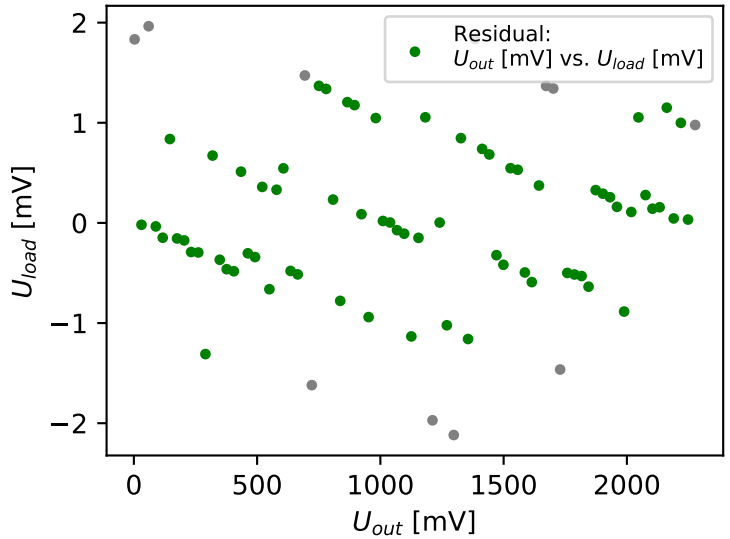
Residual:
U_{out} [mV] vs. U_{load} [mV]
U_{load} [mV]
U_{out} [mV]

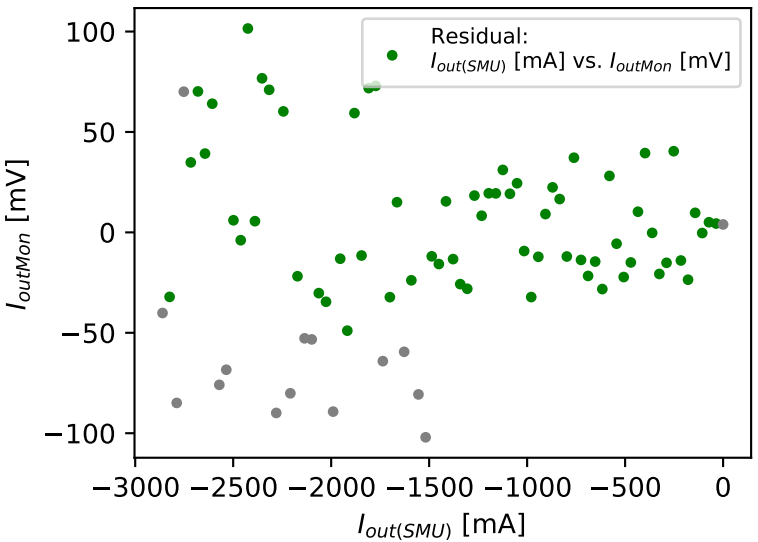
Residual:
$I_{out(SMU)}$ [mA] vs. I_{outMon} [mV]
I_{outMon} [mV]
$I_{out(SMU)}$ [mA]

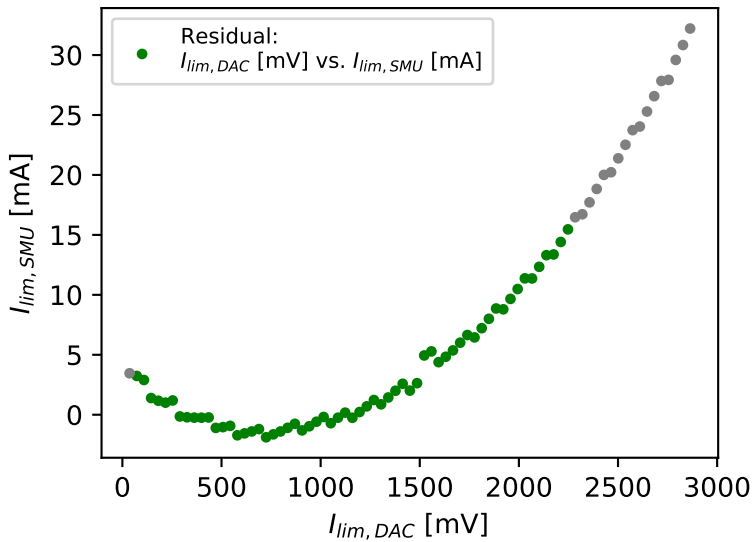
Residual:
$I_{lim,DAC}$ [mV] vs. $I_{lim,SMU}$ [mA]
$I_{lim,SMU}$ [mA]
$I_{lim,DAC}$ [mV]

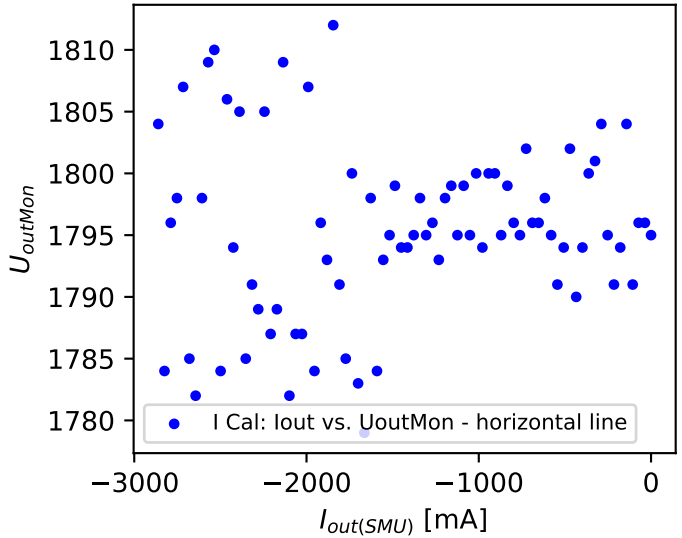
1810
1805
1800
1795
1790
1785
1780
U_{outMon}
I Cal: Iout vs. UoutMon - horizontal line
−3000
−2000
−1000
0
$I_{out(SMU)}$ [mA]

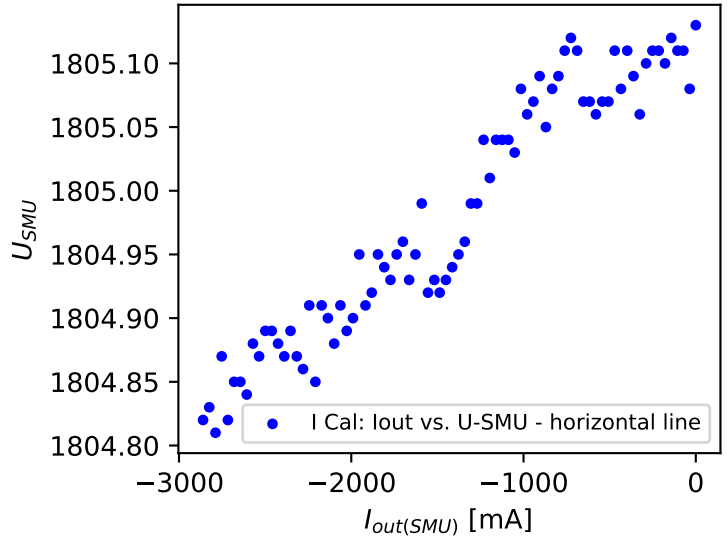
1805.10
1805.05
1805.00
1804.95
1804.90
1804.85
1804.80
U_{SMU}
I Cal: Iout vs. U-SMU - horizontal line
−3000
−2000
−1000
0
$I_{out(SMU)}$ [mA]

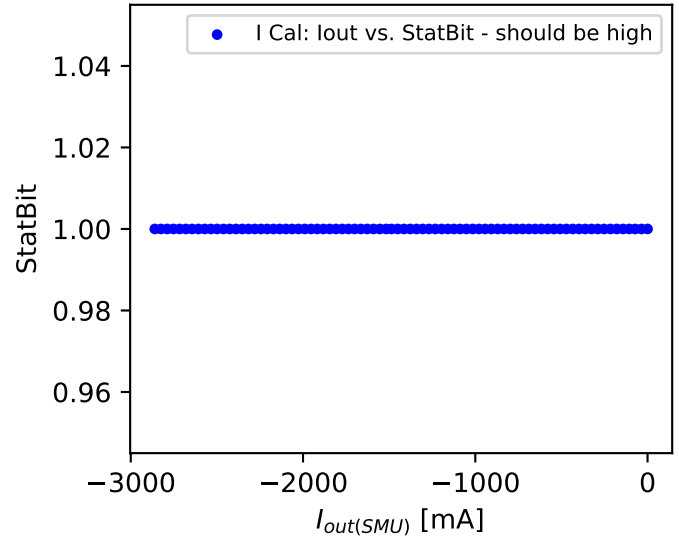
1.04
1.02
1.00
0.98
0.96
StatBit
I Cal: Iout vs. StatBit - should be high
−3000
−2000
−1000
0
$I_{out(SMU)}$ [mA]

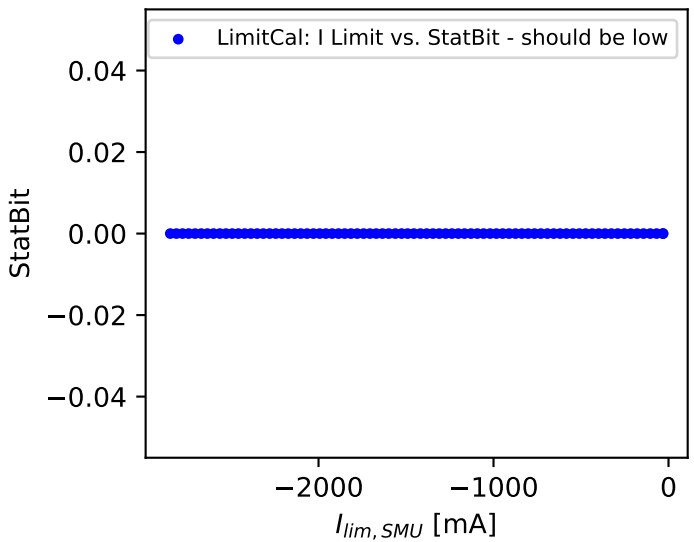
0.04
0.02
0.00
−0.02
−0.04
StatBit
LimitCal: I Limit vs. StatBit - should be low
−2000
−1000
0
$I_{lim,SMU}$ [mA]