


Buttons and LEDs

User LEDs



Mounting Holes: 125 mil for 4-40/M2.5/M3 screws

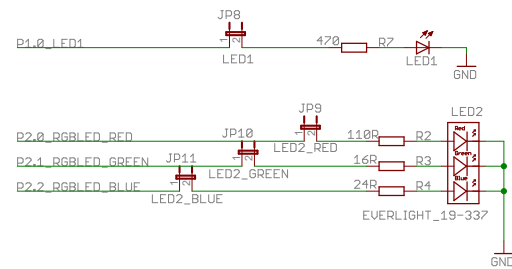


Silkscreen




REAR SILK 3 PIN PWR LEFT
REAR SILK 3 PIN PWR RIGHT


User Buttons




5V Header



RESET



3V3 Header



COMPANY: Texas Instruments

TITLE: MSP-EXP432P401R

DRAWN: Mike Stein


CHECKED:


APPROVED:


3/7/2016 1:20:11 PM

Rev: 2.0


Sheet: 2/6

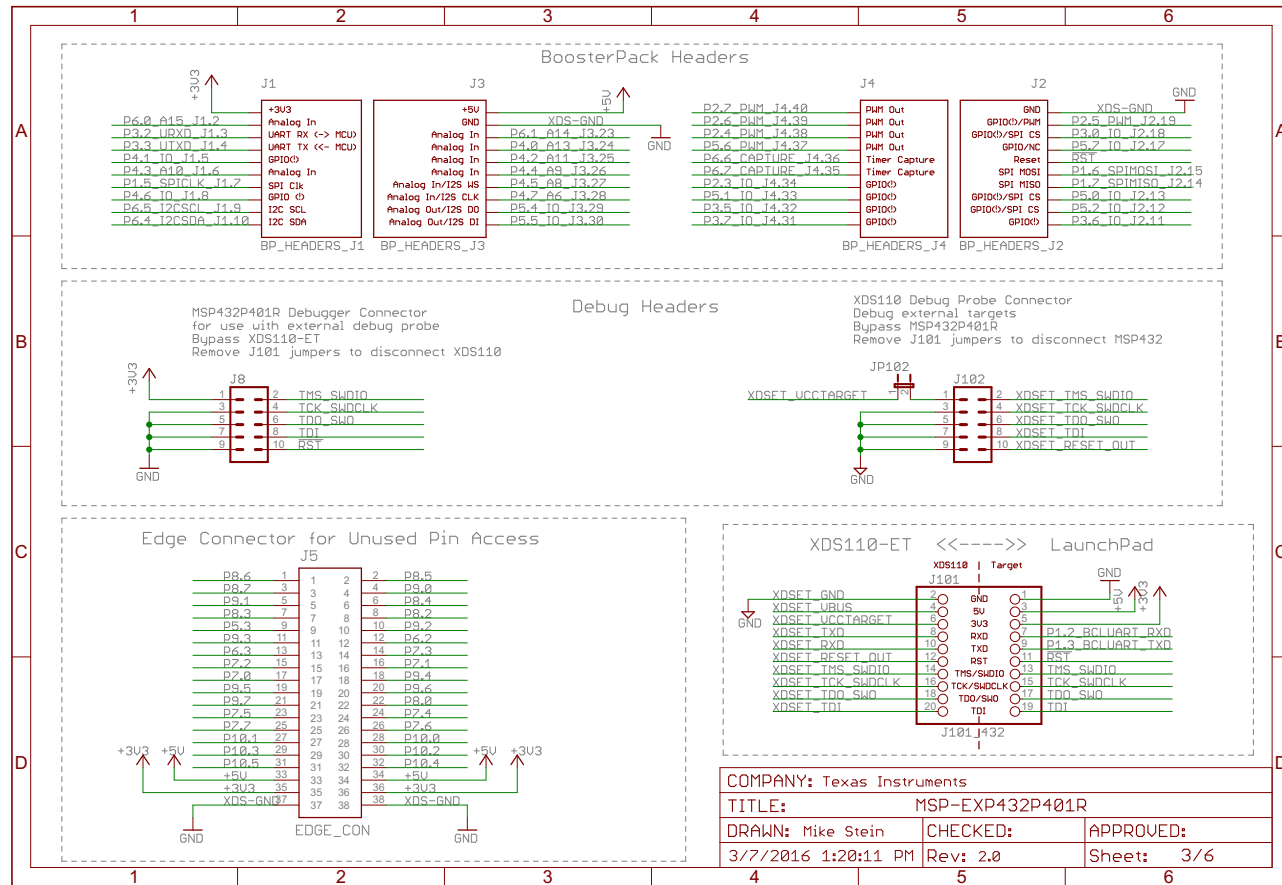


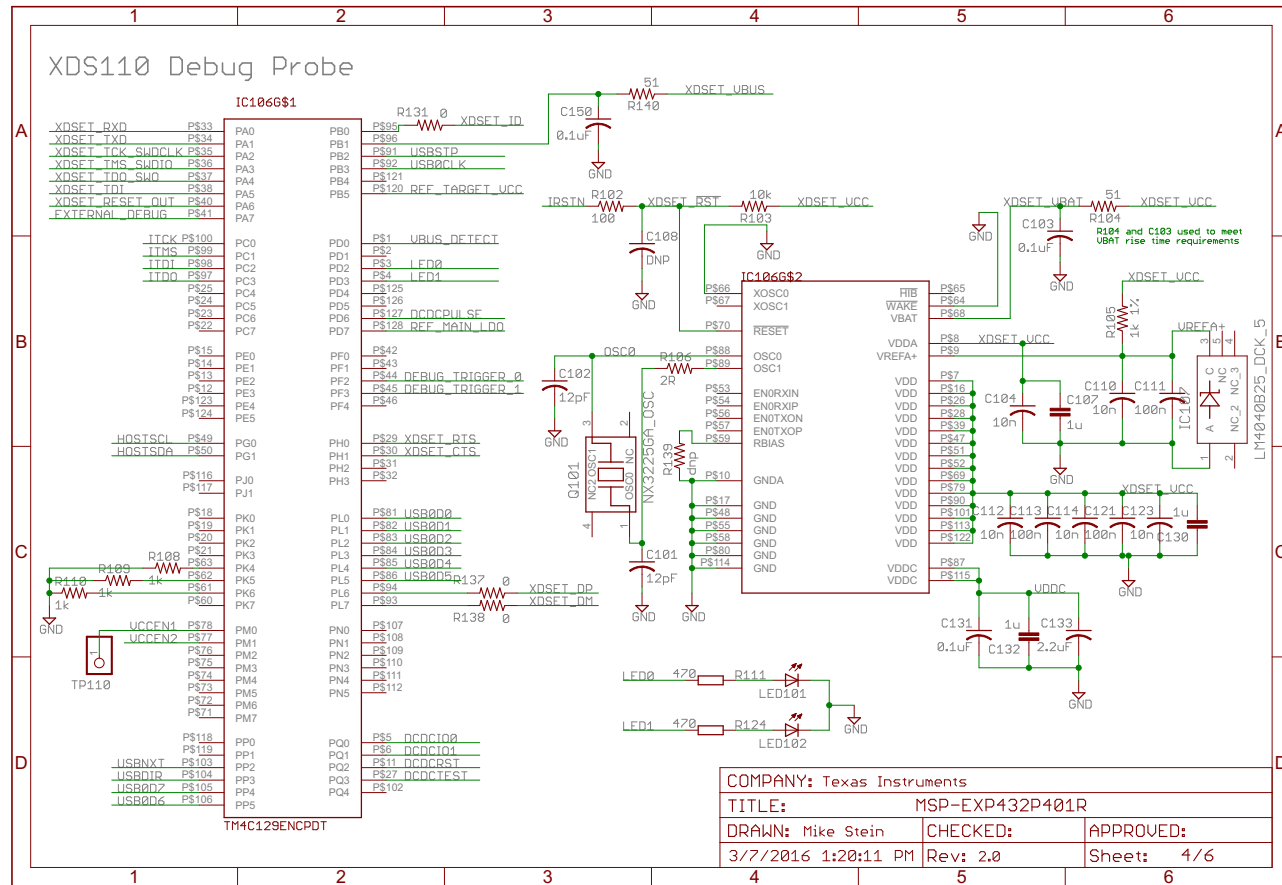


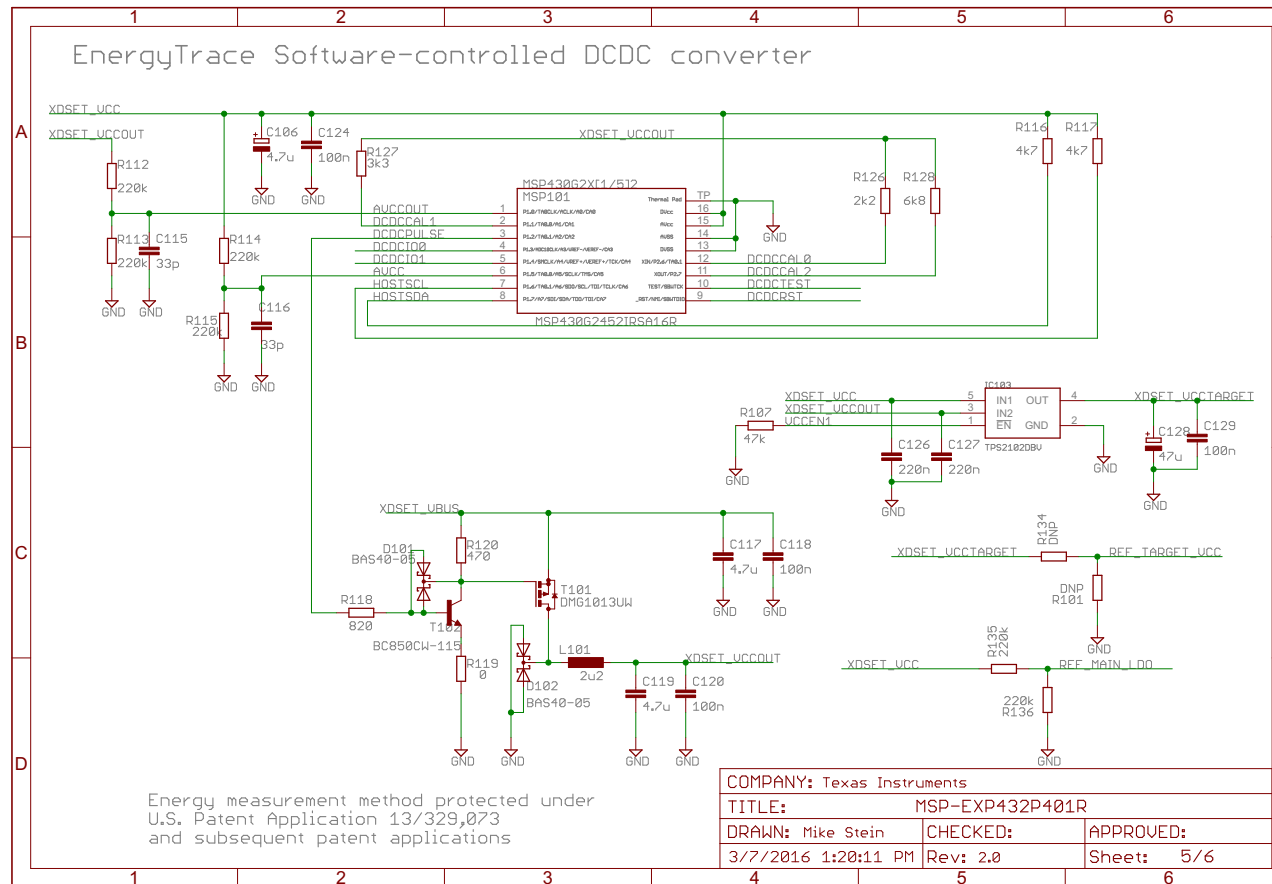

USB interface and power supply

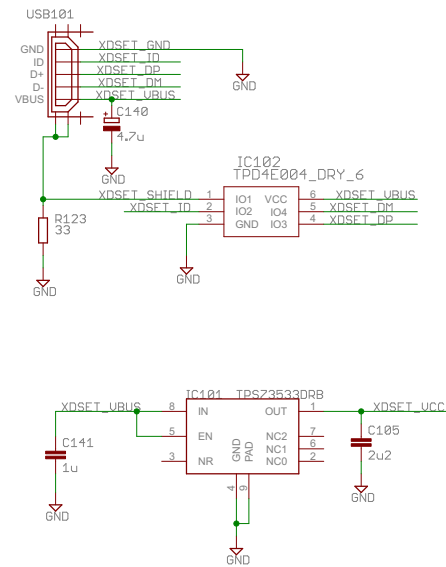

Voltage divider:
 $VBUS_DETECT = 0.4 \times XDSSET_VBUS$

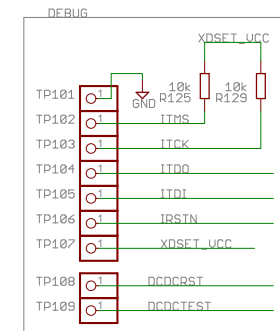

COMPANY: Texas Instruments		
TITLE: MSP-EXP432P401R		
DRAWN: Mike Stein	CHECKED:	APPROVED:
3/7/2016 1:20:11 PM	Rev: 2.0	Sheet: 6/6