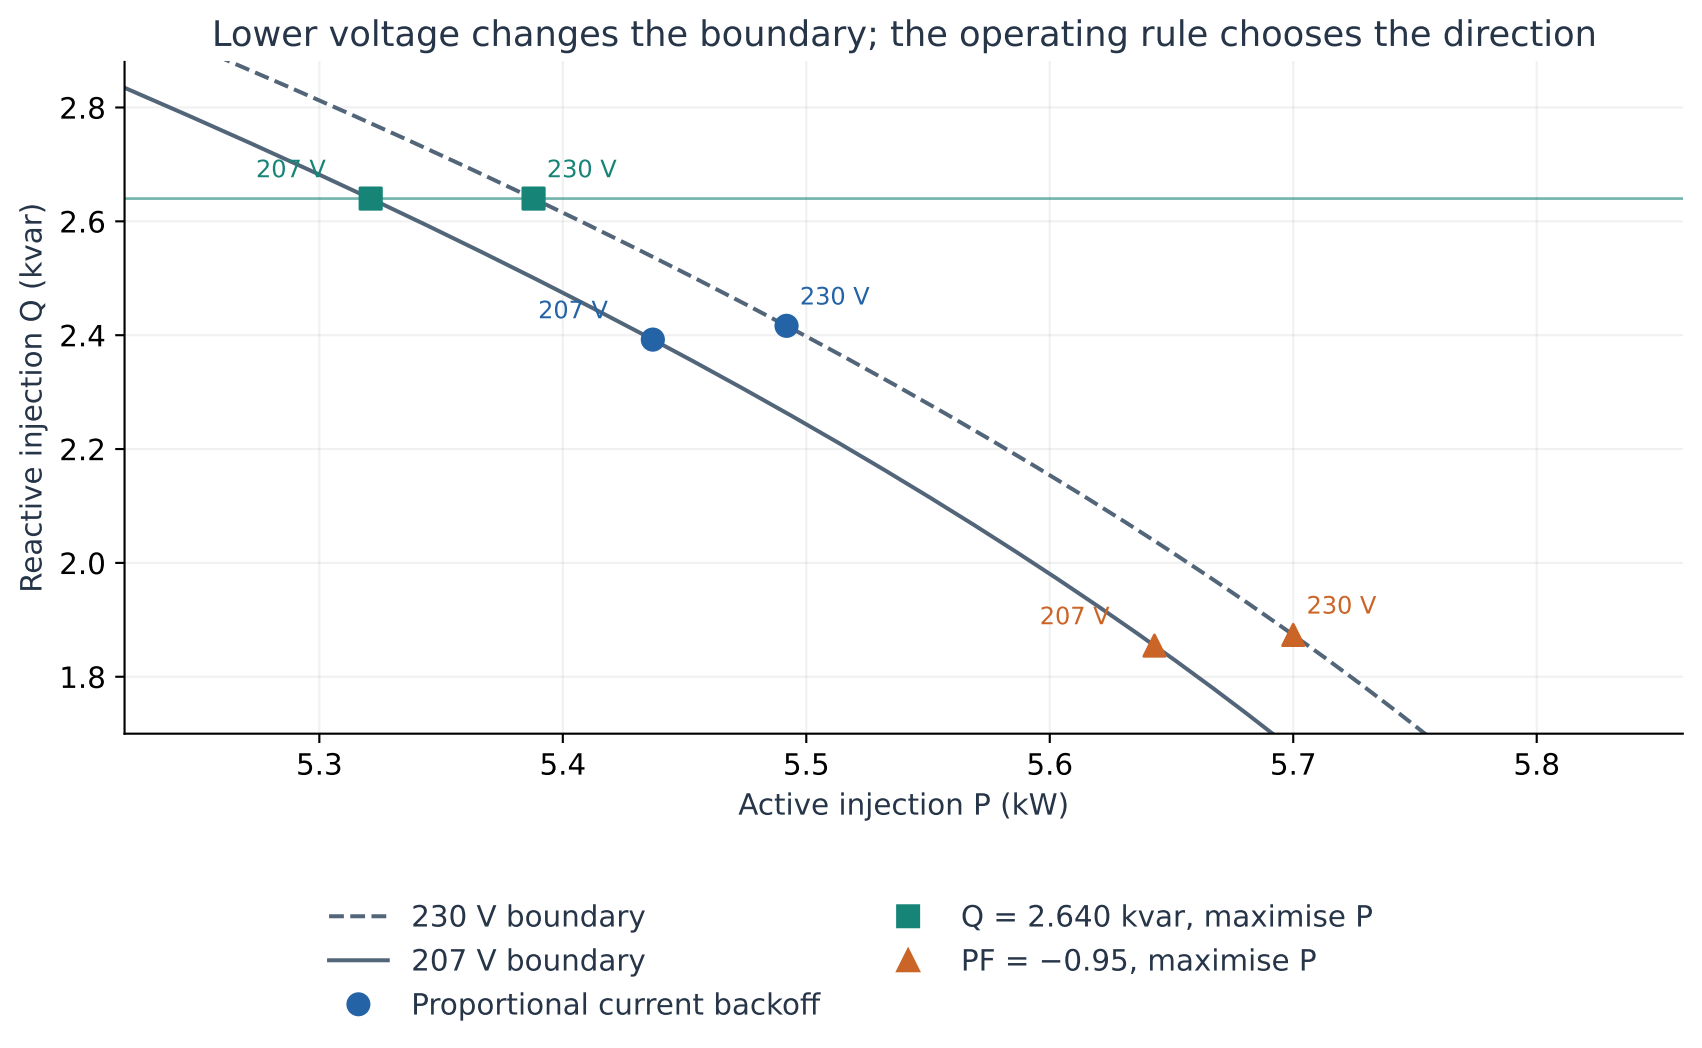
Lower voltage changes the boundary; the operating rule chooses the direction
Reactive injection Q (kvar)
2.8
2.6
2.4
2.2
2.0
1.8
5.3
5.4
5.5
5.6
5.7
5.8
Active injection P (kW)
207 V
230 V
207 V
230 V
207 V
230 V
230 V boundary
207 V boundary
Proportional current backoff
Q = 2.640 kvar, maximise P
PF = −0.95, maximise P