C11 Shell - drawing index and release status

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

Scope

Own pocket closures; four retained silicone glands; four fixed-datum face carriers; eight prepared A-post seams; six-foot water skid; removable distribution carriers; H02 service holes and four condensate traps.

Current release

DESIGN REVIEW ONLY. Pocket/crown and service interfaces, owner force limits, complete service routes, floor anchors and material/process qualification must be resolved by the closure matrix. Three final owner packages are pinned in INPUTS.json. No physical leak, load, airflow or wet test has been performed.

How to use this set

CAD STEP is the3-D source. Per-part DXF is a flat cut profile in millimetres, with its origin at profile minimum. PROFILE_MANIFEST.json restores global coordinates. Native circles are retained; other curves have0.01mm chord tolerance. CSV hole tables give centres and diameters. The selected pages below explain representative families; all registered flat parts have individual files.

Manufacturing conventions


S235JR and304L are proposed grades, subject to certificates. General profile tolerance+/-0.2mm, holes+/-0.1mm unless a specific sheet says otherwise. Deburr exposed edgesR0.5. No bend deduction is needed for these flat welded plates; inherited formed sheet is not silently treated as a developed flat. Weld before seals, machine/inspect datums after cooling, remove burrs and weld contamination.

Qualification

A-post CJP capacity is conditional on full root fusion and qualified matching weld. Silicone batch thickness/force, actual jacket adhesion, clamp loads and drain clip retention require acceptance tests. Torque values are controlled-friction design settings, not a substitute for preload qualification.

A POCKET FRONT CLOSURE

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

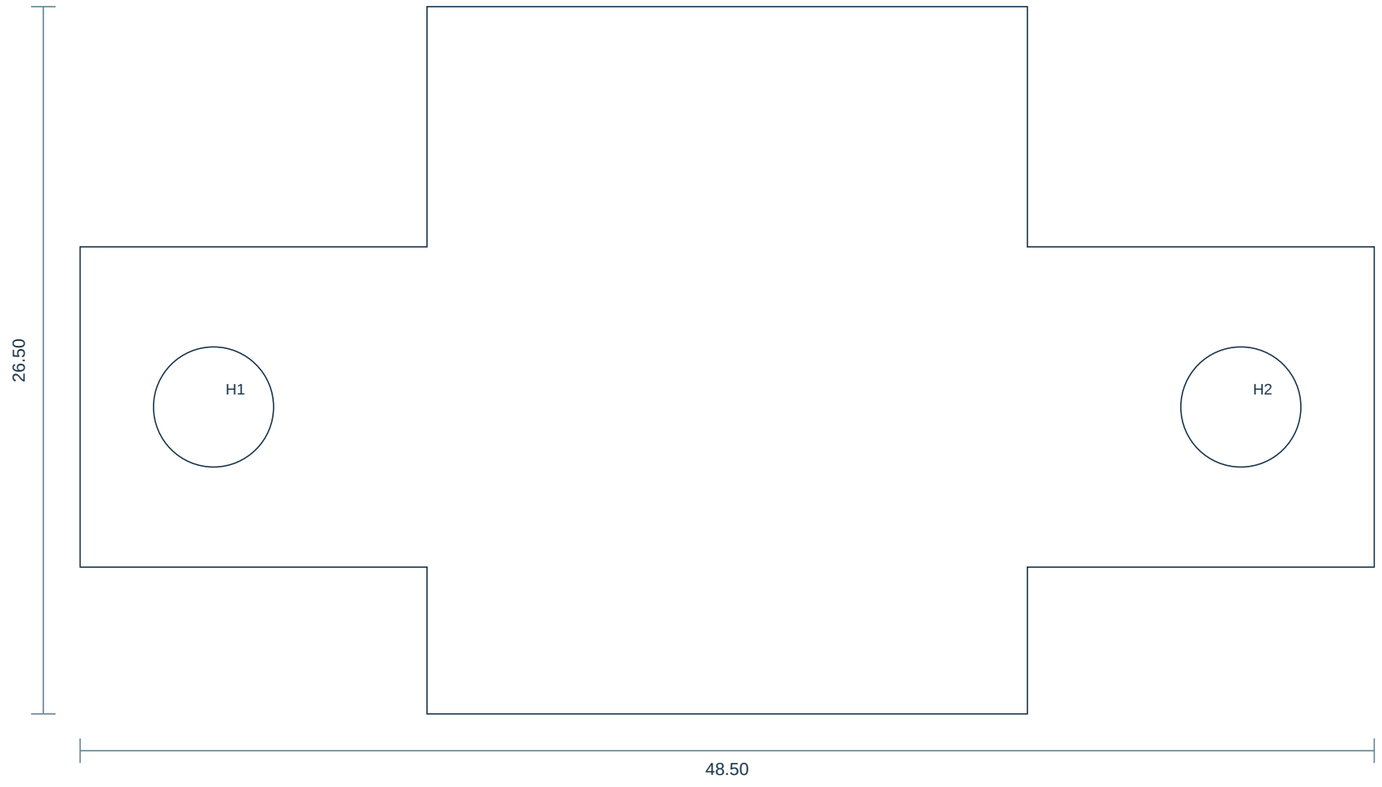

PART: C11_A_POCKET_FRONT_CLOSURE
MATERIAL: S235JR sheet 2.0
THICKNESS: 2.00 mm
VIEW AXES: Y,Z
GLOBAL FACE PLANE: -512.000 mm
DATUM: Pin mating plane X=-506.50; closure face X=-510.00
TOLERANCE: profile +/-0.10; holes +/-0.10; local flatness 0.10
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Continuous shell-owned closure, pierced only for two M4 ear clearances

HOLE CENTRES - GLOBAL VIEW AXES

H01 -774.50, 1155.00 DIA4.50
H02 -736.00, 1155.00 DIA4.50

B POCKET FRONT CLOSURE

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate




PART: C11_B_POCKET_FRONT_CLOSURE
MATERIAL: S235JR sheet 2.0
THICKNESS: 2.00 mm
VIEW AXES: Y,Z
GLOBAL FACE PLANE: -512.000 mm
DATUM: Pin mating plane X=-506.50; closure face X=-510.00
TOLERANCE: profile +/-0.10; holes +/-0.10; local flatness 0.10
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Continuous shell-owned closure, pierced only for two M4 ear clearances

HOLE CENTRES - GLOBAL VIEW AXES

H01 60.50, 1155.00 DIA4.50
H02 128.00, 1155.00 DIA4.50

A L GLAND GUARD LOW

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

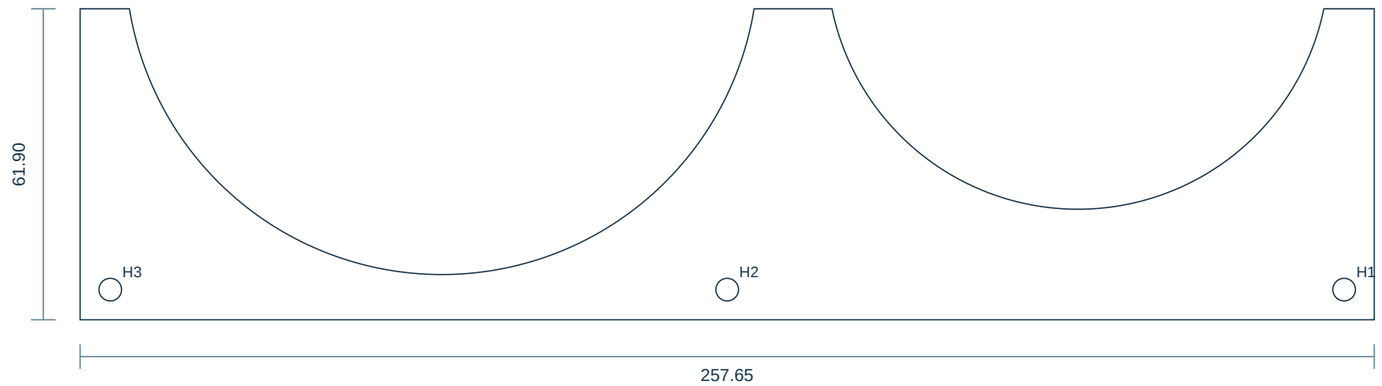


PART: C11_A_L_GLAND_GUARD_LOW
MATERIAL: S235JR plate 6.0
THICKNESS: 6.00 mm
VIEW AXES: Y,Z
GLOBAL FACE PLANE: -658.800 mm
DATUM: skin outside X=-650.8
TOLERANCE: profile +/-0.2; holes +/-0.1; deburr R0.5 all edges
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Split guard; seal reaction is carried by adhesive; guard sized for100N incidental point load

HOLE CENTRES - GLOBAL VIEW AXES

H01 -517.00, 494.00 DIA4.50
H02 -639.83, 494.00 DIA4.50
H03 -762.65, 494.00 DIA4.50

A L GLAND BACKER

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

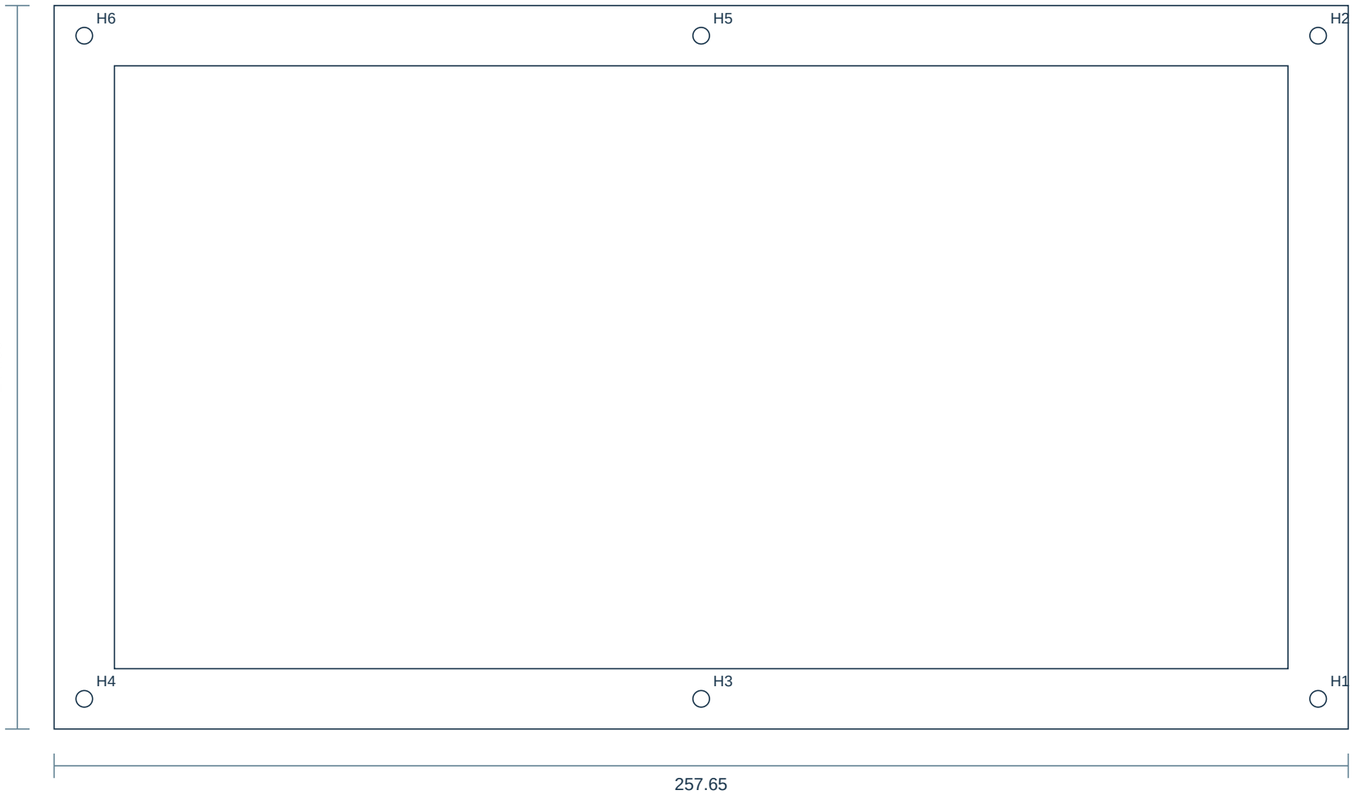

PART: C11_A_L_GLAND_BACKER
MATERIAL: S235JR plate 5.0
THICKNESS: 5.00 mm
VIEW AXES: Y,Z
GLOBAL FACE PLANE: -649.300 mm
DATUM: skin inside X=-649.3;6 blind M4 taps depth4.0, closed wall>=0.9
TOLERANCE: profile +/-0.2; ring flatness0.2; blind tap depth+0.1/-0.0; no breakthrough
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: 12 mm perimeter ring; thickness sized for1kN blind-thread proof; continuous sealed interface to skin; edge welds inspected before assembly

HOLE CENTRES - GLOBAL VIEW AXES

H01 -517.00, 494.00 DIA3.30
H02 -517.00, 626.00 DIA3.30
H03 -639.83, 494.00 DIA3.30
H04 -762.65, 494.00 DIA3.30
H05 -639.83, 626.00 DIA3.30
H06 -762.65, 626.00 DIA3.30

A LOWER FACE CARRIER


CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate



PART: C11_A_LOWER_FACE_CARRIER
MATERIAL: S235JR plate 2.0
THICKNESS: 2.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 613.550 mm
DATUM: seal bed Z=615.55
TOLERANCE: seal plane peak-to-valley0.10; stop heights +/-0.05
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Lowered seal bed; inner skirt welded before flatness grinding; fixed core plane unchanged

A LOWER FACE CLAMP 01

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

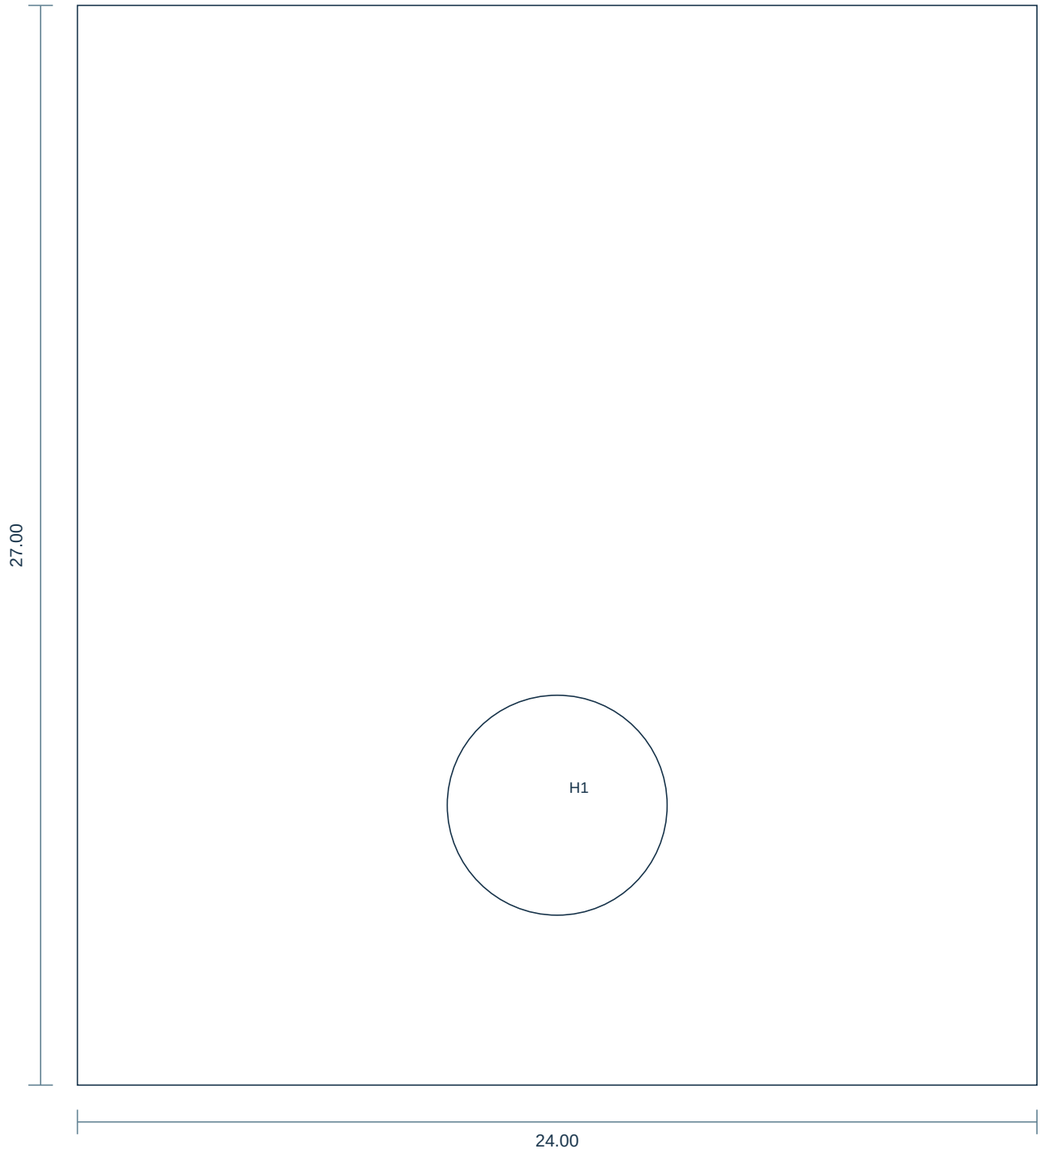


PART: C11_A_LOWER_FACE_CLAMP_01
MATERIAL: S235JR plate 8
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 628.000 mm
DATUM: HX steel contact top Z=628;socket head
TOLERANCE: profile +/-0.2; hole +/-0.1; underside flatness0.05
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Opposed bottom frame-land clamp; M5 clearance5.5; max500N,0.50Nm; thin left YMIN jaw39mm wide, X-430..-391, with15mm maximum toe arm; qualify local plate/contact behaviour

HOLE CENTRES - GLOBAL VIEW AXES

H01 -350.00, -768.50 DIA5.50

A LOWER FACE CLAMP 02

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

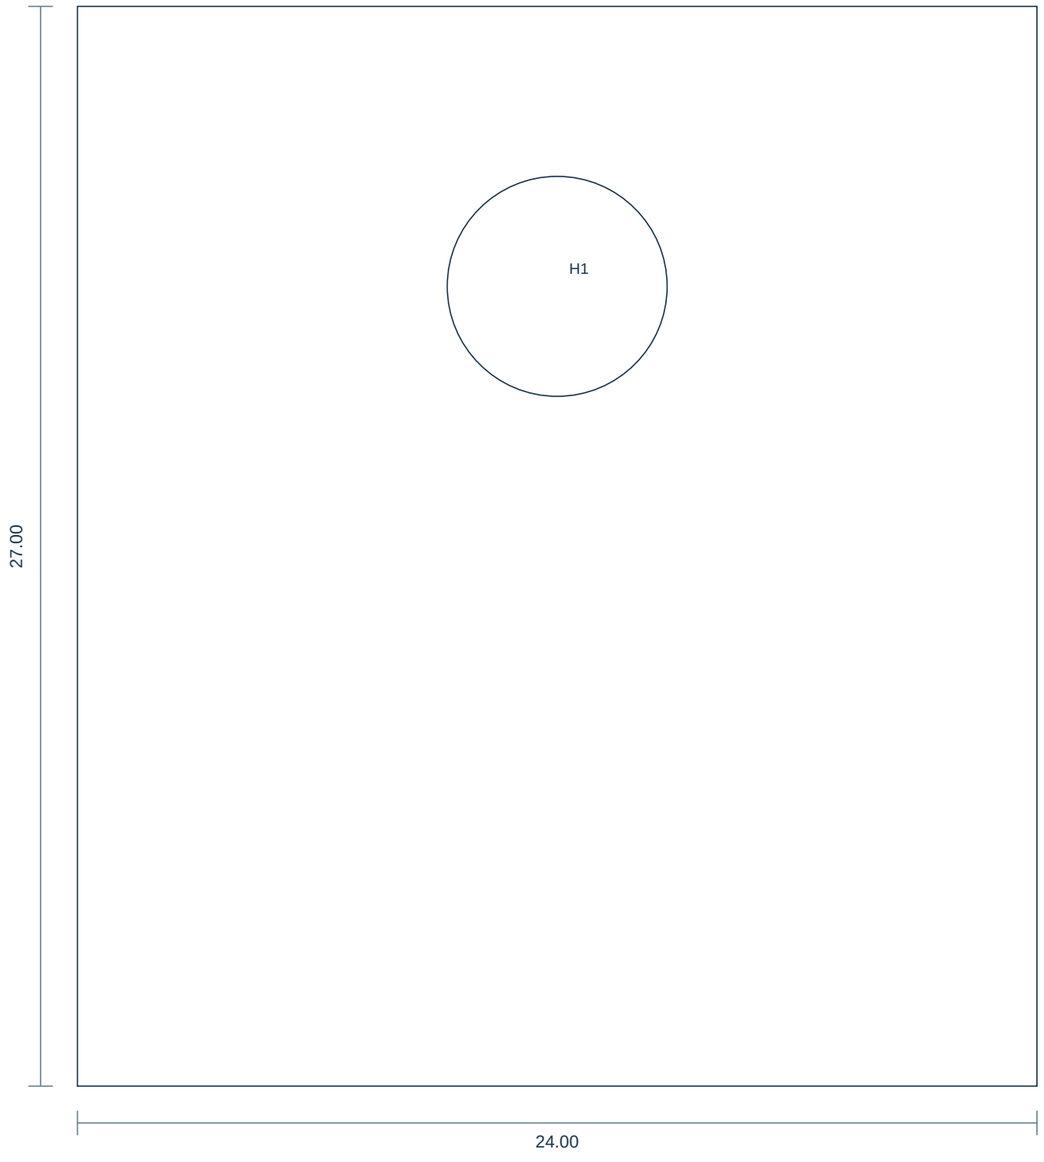


PART: C11_A_LOWER_FACE_CLAMP_02
MATERIAL: S235JR plate 8
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 628.000 mm
DATUM: HX steel contact top Z=628;top90deg countersinkD10 flushM5 head
TOLERANCE: profile +/-0.2; hole +/-0.1; underside flatness0.05
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Opposed bottom frame-land clamp; M5 clearance5.5; max500N,0.50Nm; thin left YMIN jaw39mm wide, X-430..-391, with15mm maximum toe arm; qualify local plate/contact behaviour

HOLE CENTRES - GLOBAL VIEW AXES

H01 -350.00, -96.50 DIA5.50

A LOWER FACE CLAMP 17

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

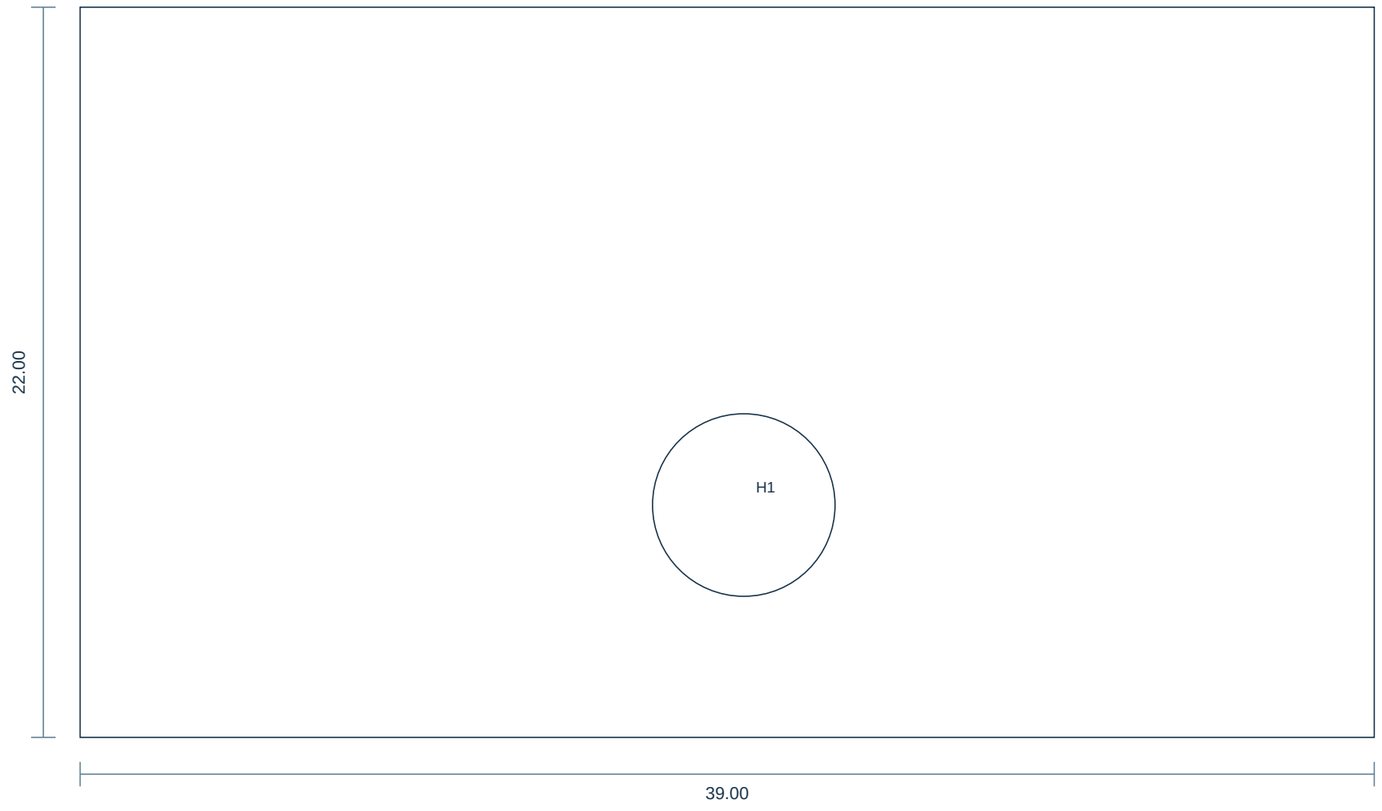


PART: C11_A_LOWER_FACE_CLAMP_17
MATERIAL: S235JR plate 3.5
THICKNESS: 3.50 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 628.000 mm
DATUM: HX steel contact top Z=628;top90deg countersinkD10 flushM5 head
TOLERANCE: profile +/-0.2; hole +/-0.1; underside flatness0.05
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Opposed bottom frame-land clamp; M5 clearance5.5; max500N,0.50Nm; thin left YMIN jaw39mm wide, X-430..-391, with15mm maximum toe arm; qualify local plate/contact behaviour

HOLE CENTRES - GLOBAL VIEW AXES

H01 -410.00, -768.50 DIA5.50

A LOWER FACE LEFT END MOUNT 17


CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

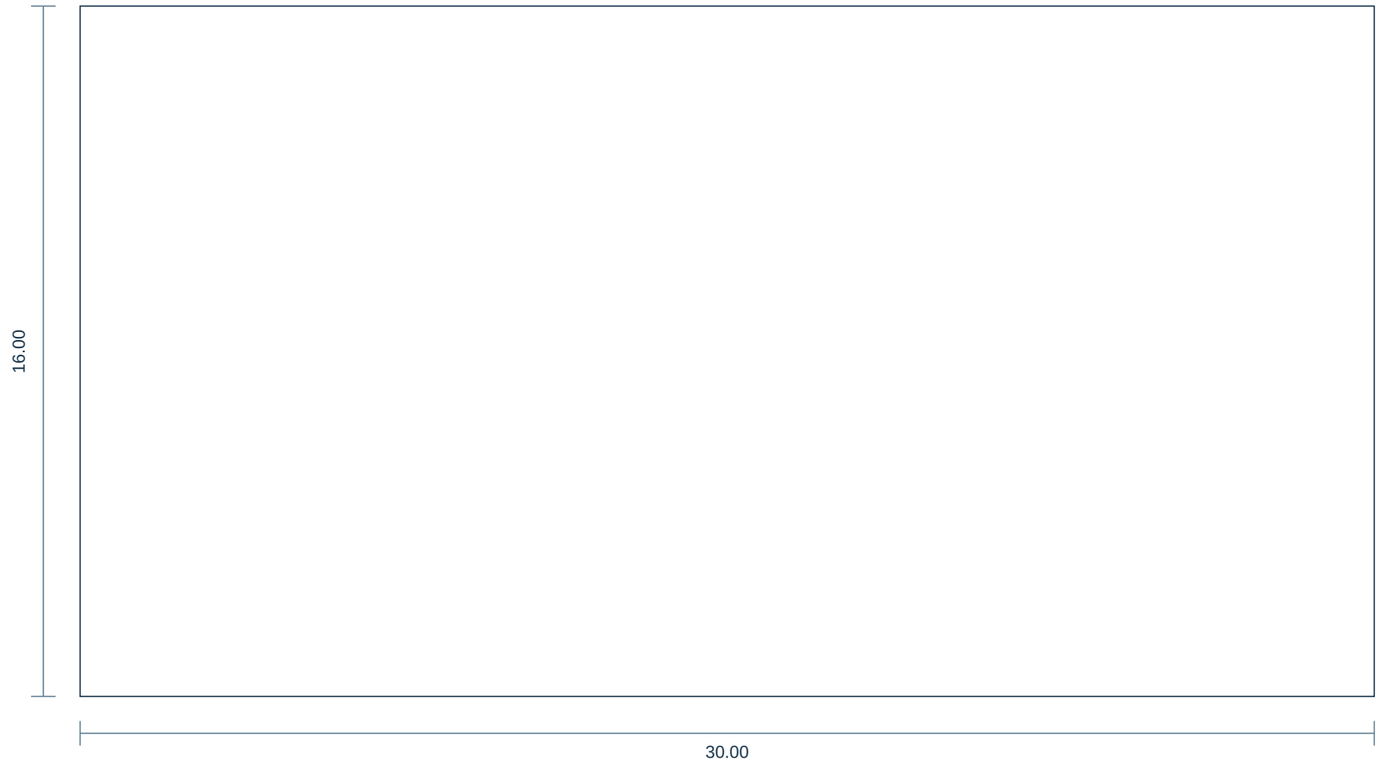

PART: C11_A_LOWER_FACE_LEFT_END_MOUNT_17
MATERIAL: S235JR plate3
THICKNESS: 3.00 mm
VIEW AXES: Y,Z
GLOBAL FACE PLANE: -424.000 mm
DATUM: back face X=-424; centred within25mm RHS side height
TOLERANCE: profile+/-0.2; root fit per qualified WPS
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: 30x16 mounting plate on unchanged left RHS sideX-424; perimeter a3 weld, effective horizontal24/vertical10mm; local RHS wall and complete bracket1.5kN proof required. Verify real stock corner/weld access; no frame cut.

A LOWER FACE LEFT END BEARING 17

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

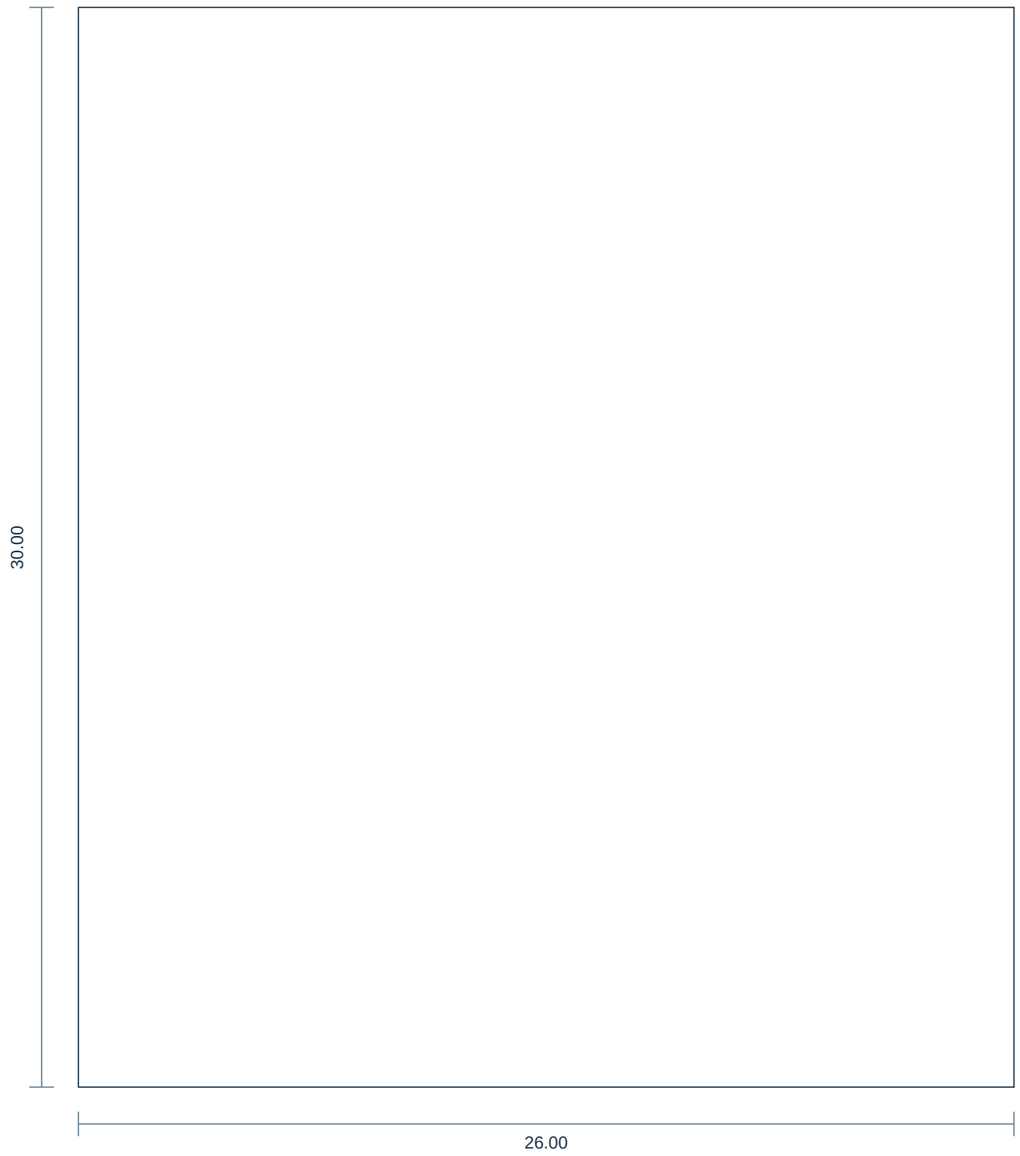


PART: C11_A_LOWER_FACE_LEFT_END_BEARING_17
MATERIAL: S235JR plate8
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 605.550 mm
DATUM: top Z=613.55; root X=-421
TOLERANCE: bearing flatness0.05; selected height+/-0.05
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: 26x30 bearing extension supports carrier and left end clamp; weld to mount and two gussets; top flush to carrier underside; no load through skin or copper

A LOWER FACE LEFT END GUSSET 17 1


CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

PART: C11_A_LOWER_FACE_LEFT_END_GUSSET_17_1
MATERIAL: S235JR plate3
THICKNESS: 3.00 mm
VIEW AXES: X,Z
GLOBAL FACE PLANE: -778.500 mm
DATUM: Y=-778.5; root X=-421
TOLERANCE: profile+/-0.2; root fit per qualified WPS
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Right triangle26x12; double-sided a3 root welds to mount and shelf; effective root6mm each side; qualify thin-wall welds and proof complete bracket1.5kN

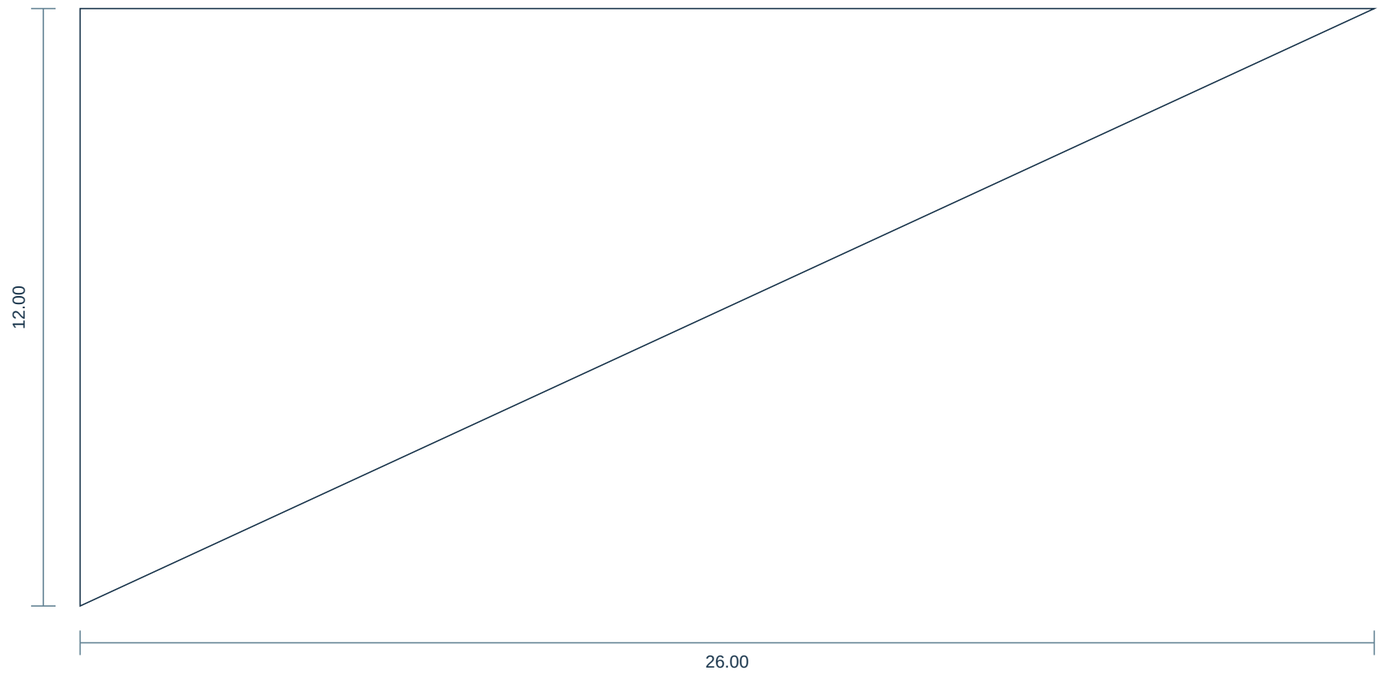

HYD F1 TOP PLATE

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

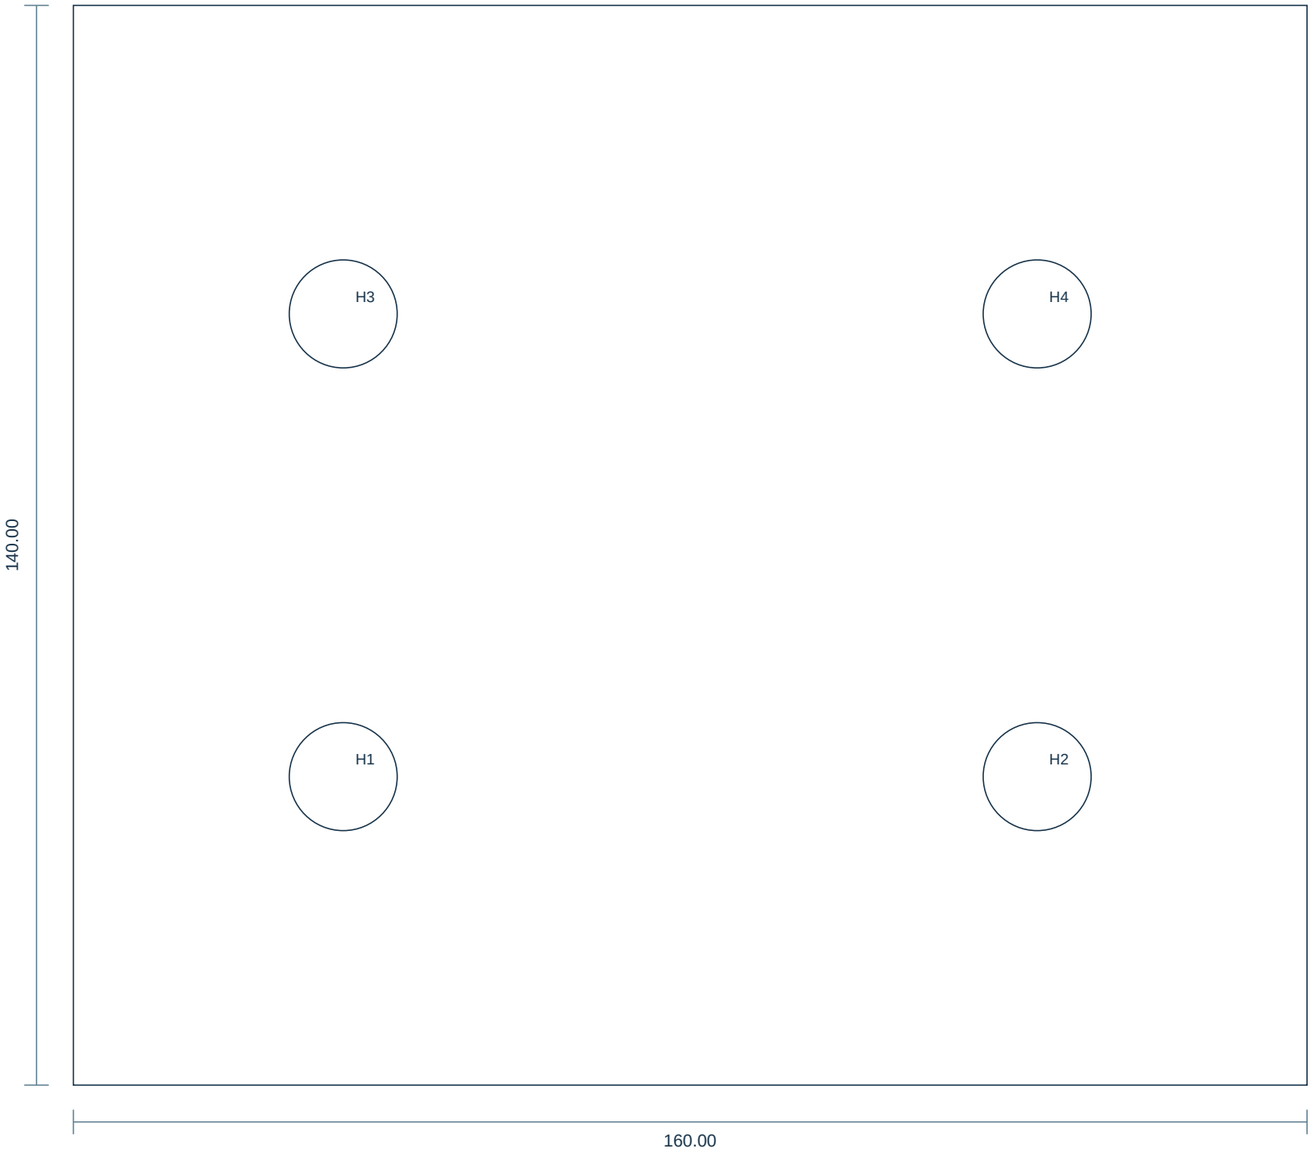


PART: C11_HYD_F1_TOP_PLATE
MATERIAL: S235JR plate8.0
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 114.000 mm
DATUM: topZ122; foot centres from pinned IF01 table
TOLERANCE: hole position +/-0.10; bearing flatness0.10; foot plane +/-0.10 before owner shims
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: 160x140; fourD14 holes on90x60; offset5mm along each owner X slot; Z122 mating face; a3 seams along rail sides; effective128mm each

HOLE CENTRES - GLOBAL VIEW AXES

H01 -1705.00, -1210.00 DIA14.00
H02 -1615.00, -1210.00 DIA14.00
H03 -1705.00, -1150.00 DIA14.00
H04 -1615.00, -1150.00 DIA14.00

HYD F1 45 30 TOP WASHER

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

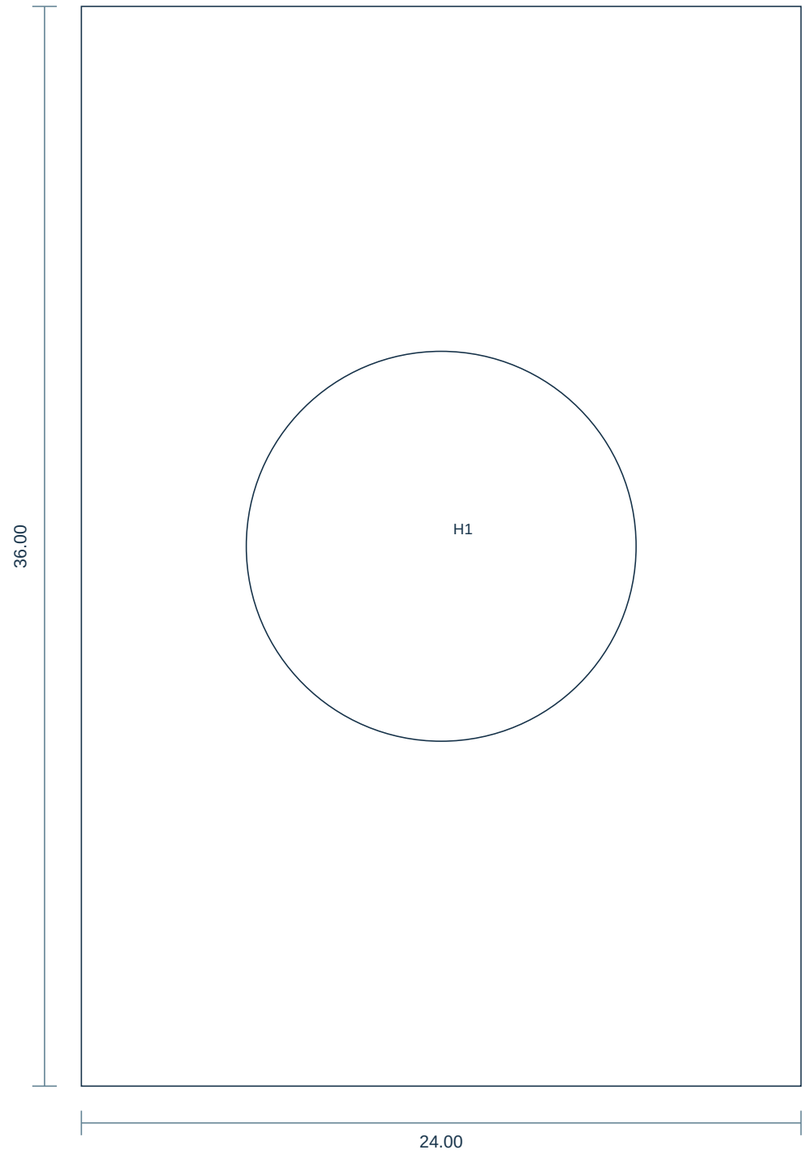


PART: C11_HYD_F1_45_30_TOP_WASHER
MATERIAL: S235JR machined plate washer24Xx36Yx18
THICKNESS: 18.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 132.000 mm
DATUM: bolt centresXfoot+/-45,Yfoot+/-30
TOLERANCE: D13+0.2; flatness0.05; thickness+/-0.10
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: D13 bore; bridges14mm owner slot;3mm clearance to60mm riser;25kN preload screen147.3MPa; bearing faces machined parallel

HOLE CENTRES - GLOBAL VIEW AXES

H01 -1615.00, -1150.00 DIA13.00

HYD F5 FLOOR PAD

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

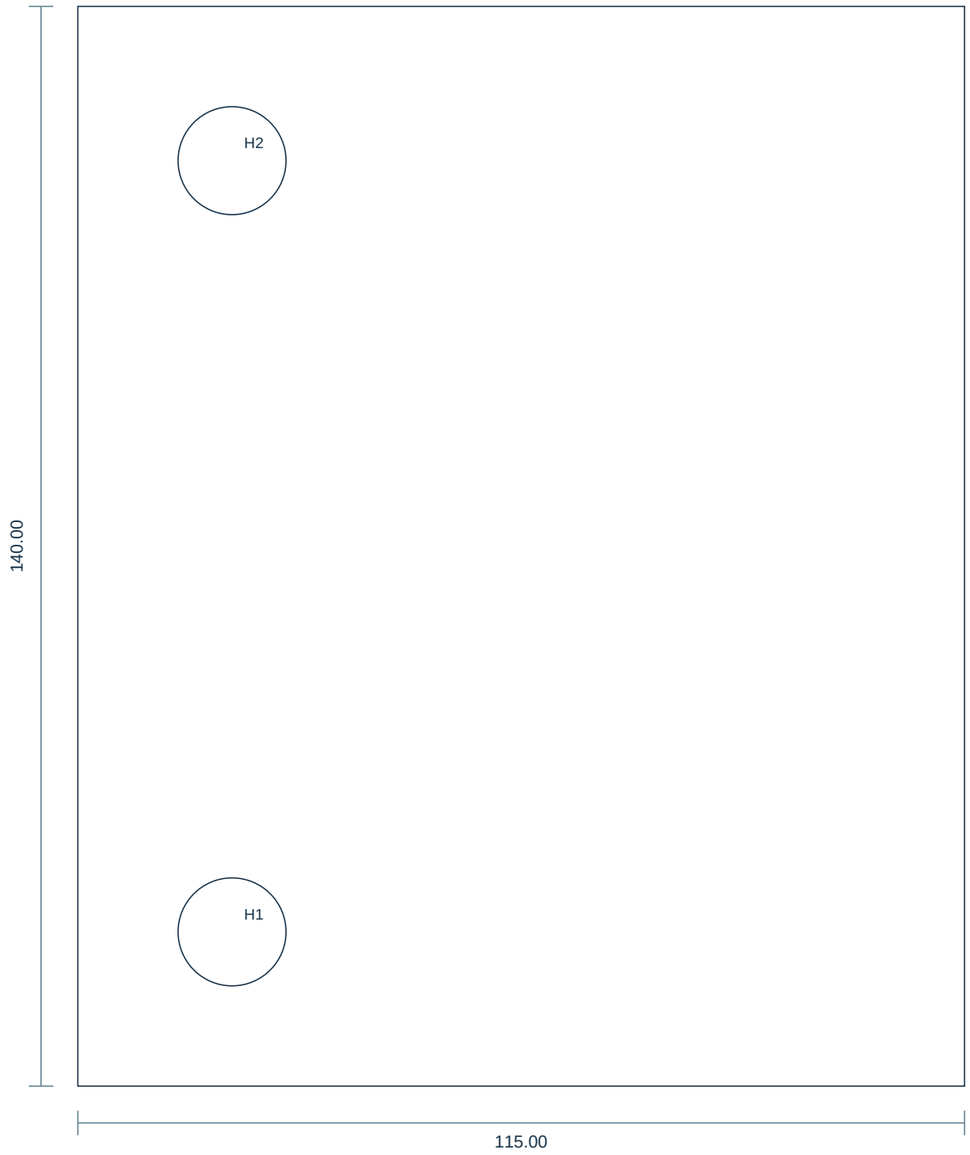


PART: C11_HYD_F5_FLOOR_PAD
MATERIAL: S235JR plate8.0
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 26.000 mm
DATUM: nominal common floorZ26
TOLERANCE: holes +/-0.2; full bearing after levelling; no unsupported corners
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Far pads160x140 fourD14 on120x100; near pads115x140 twoD14 atXcentre-60,Y+/-50, right edgeX-745 clears main feet by5mm; full-area bearingZ26; anchor/substrate selection OPEN

HOLE CENTRES - GLOBAL VIEW AXES

H01 -840.00, -150.00 DIA14.00
H02 -840.00, -50.00 DIA14.00

P FOOT -600 0 O

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

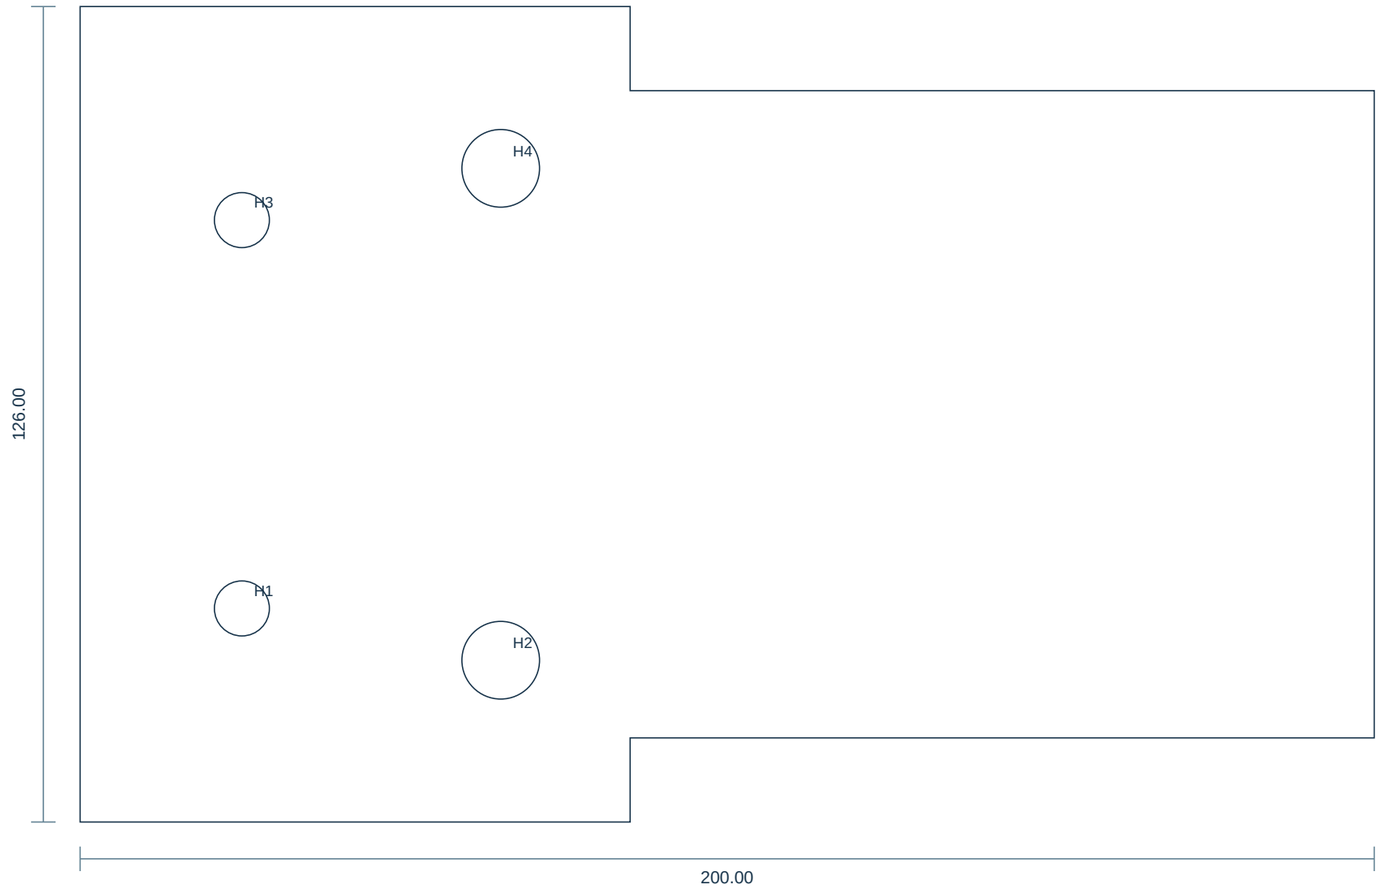


PART: P_FOOT_-600_0_O
MATERIAL: S235JR plate12.0
THICKNESS: 12.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 30.000 mm
DATUM: original topZ42 and D12 anchor centres unchanged
TOLERANCE: M10 position +/-0.10; flatness0.10; minimum12mm full thread
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Extend outer edge toX-740, preserve topZ42 and originalD12 anchors; add2M10 tapped holes atX-715,Ycentre+/-30; no change to post or base beam

HOLE CENTRES - GLOBAL VIEW AXES

H01 -715.00, -30.00 DIA8.50
H02 -675.00, -38.00 DIA12.00
H03 -715.00, 30.00 DIA8.50
H04 -675.00, 38.00 DIA12.00

BRIDGE P FOOT -600 0 O

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

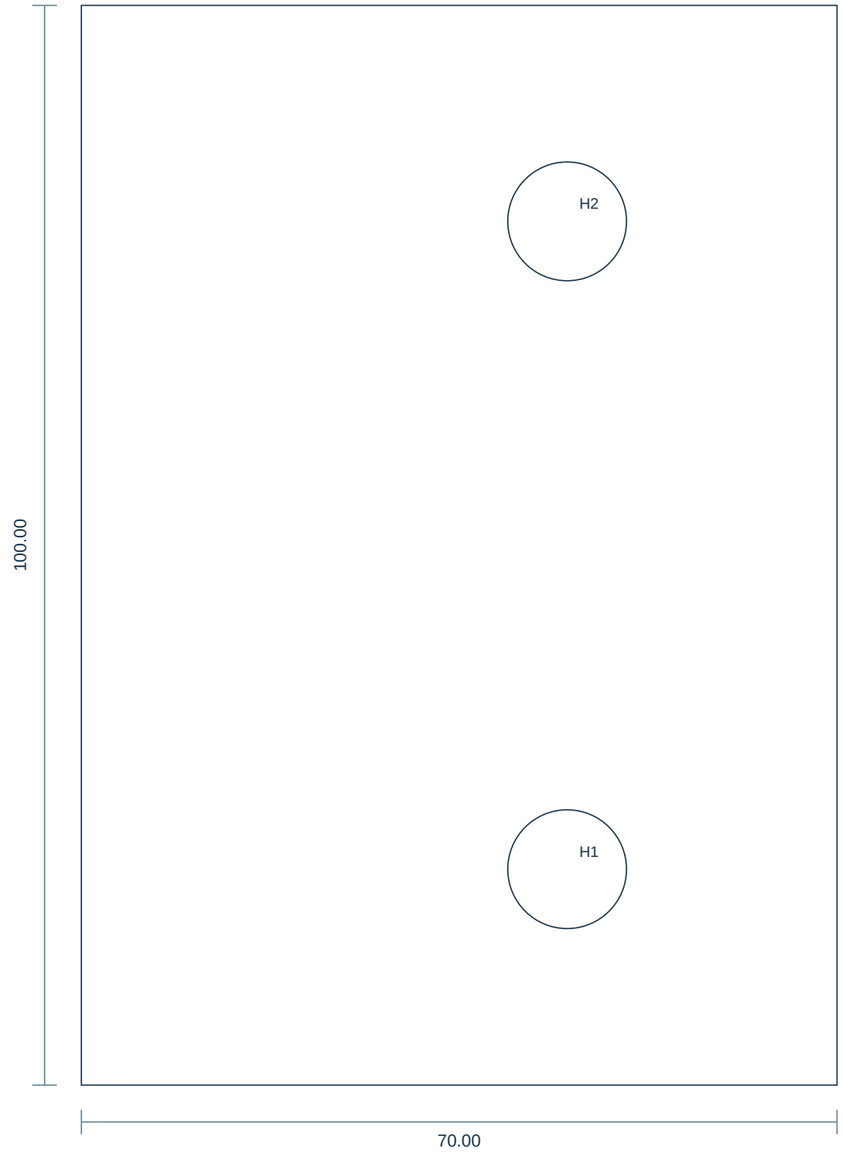


PART: C11_BRIDGE_P_FOOT_-600_0_O
MATERIAL: S235JR plate8.0
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 42.000 mm
DATUM: bottomZ42; holeX-715, Ycentre+/-30
TOLERANCE: D11 holes +/-0.10; flatness0.10
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: 70x100 bridge; a3 continuous100mm seam to skid rail faceX-760; bolted to thicker main foot; never to skin

HOLE CENTRES - GLOBAL VIEW AXES

H01 -715.00, -30.00 DIA11.00
H02 -715.00, 30.00 DIA11.00

A DISTRIBUTION OPEN CASSETTE

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

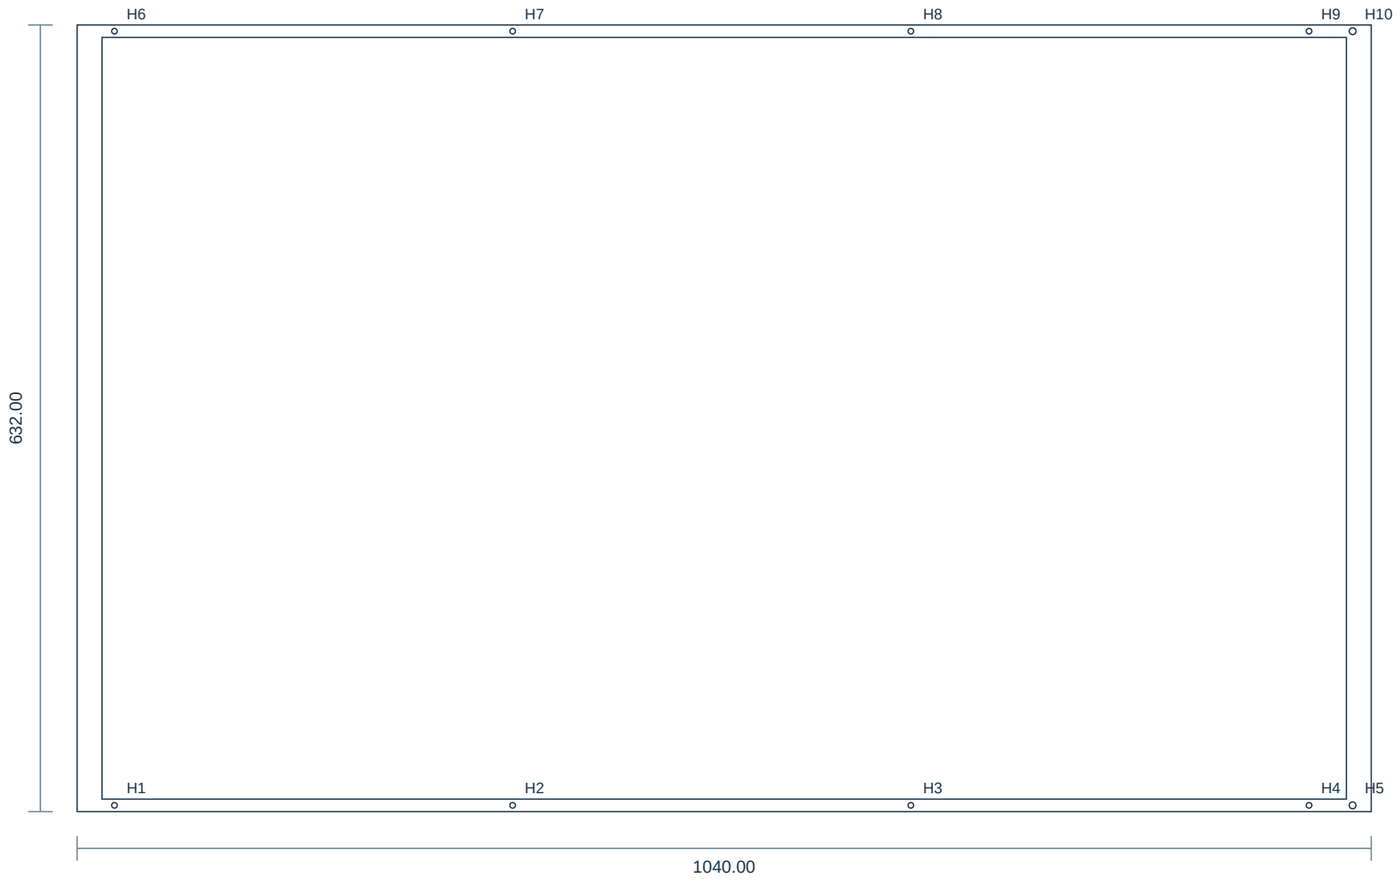


PART: C11_A_DISTRIBUTION_OPEN_CASSETTE
MATERIAL: S235JR plate3.0
THICKNESS: 3.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 579.000 mm
DATUM: Z579 lower face; X-430..610; original coreZ620 unchanged
TOLERANCE: profile +/-0.2; holes +/-0.1; flatness0.3
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Open1000x612 air window; empty carrier for baseline airflow test; optional plate must be separately qualified

HOLE CENTRES - GLOBAL VIEW AXES

H01 -400.00, -743.50 DIA4.50
H02 -80.00, -743.50 DIA4.50
H03 240.00, -743.50 DIA4.50
H04 560.00, -743.50 DIA4.50
H05 595.00, -743.50 DIA5.50
H06 -400.00, -121.50 DIA4.50
H07 -80.00, -121.50 DIA4.50
H08 240.00, -121.50 DIA4.50
H09 560.00, -121.50 DIA4.50
H10 595.00, -121.50 DIA5.50

A DISTRIBUTION SUPPORT OUT 1


CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

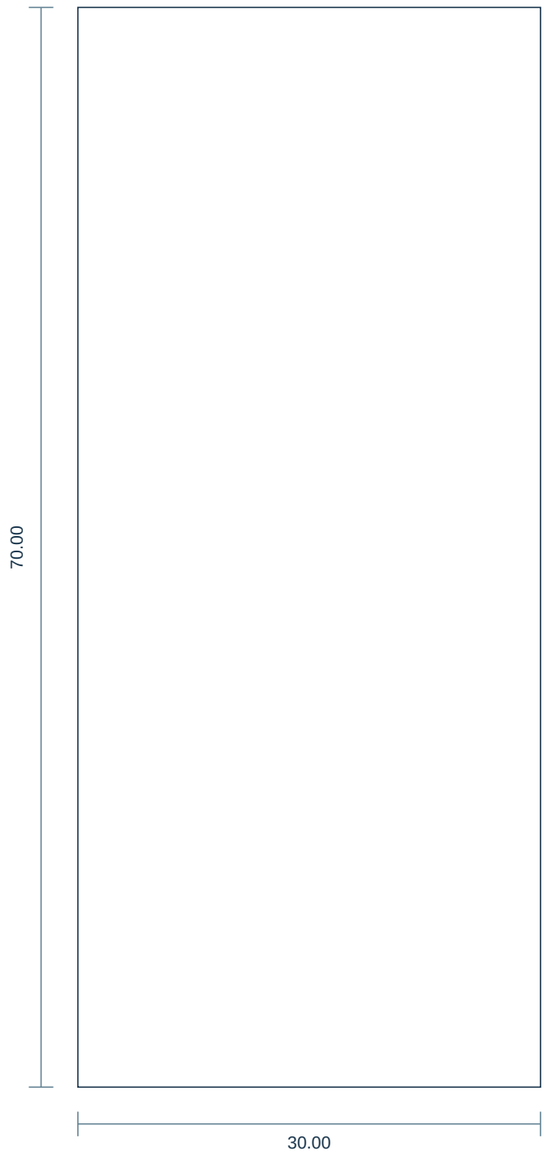

PART: C11_A_DISTRIBUTION_SUPPORT_OUT_1
MATERIAL: S235JR plate6.0
THICKNESS: 6.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 559.000 mm
DATUM: rail undersideZ565; no load through air skin
TOLERANCE: profile +/-0.2; installed height +/-0.1
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: Rail load to existing lower HX crossbeam; continuous6mm arm root weld, proof500N per arm

A LOWER COND SUPPORT SHELF

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

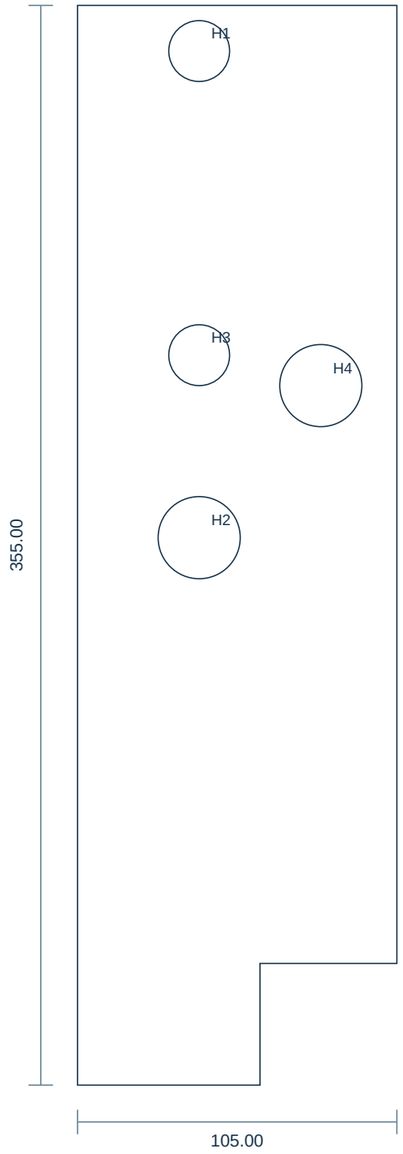

PART: C11_A_LOWER_COND_SUPPORT_SHELF
MATERIAL: S235JR plate8.0
THICKNESS: 8.00 mm
VIEW AXES: X,Y
GLOBAL FACE PLANE: 295.680 mm
DATUM: trap lower centreZ=254.68; shelf topZ=303.68
TOLERANCE: profile +/-0.2; bores +/-0.1
BENDS: none; flat plate, R/K not applicable
PROFILE: DXF and SVG supplied at1:1
ASSEMBLY: 60mm root bridge to post left face; a3 seam gross40 effective34; two trap clips;300N vertical proof per trap

HOLE CENTRES - GLOBAL VIEW AXES

H01 -720.00, -930.00 DIA20.00
H02 -720.00, -1090.00 DIA27.00
H03 -720.00, -1030.00 DIA20.00
H04 -680.00, -1040.00 DIA27.00

A-post - eight groove seams and load path

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

Four existing3mm webs connect the relieved post to the22x60x3 sister RHS. Post and sister solids are unchanged. Each web has one POST and one SISTER seam:8seams total.

Single-bevel T-butt,45deg,0.5mm root face and0.5mm root gap. Matching weld fills the actual prepared CAD groove. Nominal full-penetration throat3mm; gross269mm, effective257mm, with6mm excluded at each end.

Rear accessX=-640; front accessX=-618. JointY=-824 at post andY=-805 at sister. Lower seamZ443..712; upperZ778..1047. Outer access faces flush+0/-0.1mm, no projecting fillet into insulation clearance.

Use removable copper backing from open channel ends. Qualify the actual thin-wall T-joint, matching consumable and root access. Macro/root-fusion and bend acceptance precede capacity credit.100%VT plus specified surface examination; backing withdrawal inspected.

Sequence: fixture; lower rear / upper front / lower front / upper rear, short opposing backsteps, alternate POST/SISTER ends. Cool fully, inspect straightness and loaded HX/damper datums before fitting insulation.

Calculations: local_calculations.json gives per-seam parent-strength capacities. frame_screen_mesh*.json models the complete beam frame with finite web shear/extension springs. Geometric composite inertia alone is not used as assembled stiffness. Ground, real joint rigidity, mass-cap reconciliation and physical qualification remain separate conditions.

Assembly notes - seal, gland, roof and drain checks

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

FACE: frozen core bottomZ620/955. SelectedR10480S6.35+/-0.10, installed4.45, permitted qualified gap4.20..4.70.12mm band lies in20mm HX land. Three bearing pads and positive locators establish core position;20 opposed clamps close on the BOTTOM steel frame, never fins or copper. Keep temporary support until all clamps are set. HX force and652mm edge uplift capacity remain HOLD. Shell carrier has continuous left bearing, eight gusseted end bearing extensions and RHS50x30x3 right strongback. Left YMIN jaw:39mm wide,X-430..-391,3.5mm thick,flushM5x12;1mm nominal gap to condensate rail. No upper-frame long ties remain.

GLAND:2mm true-normal silicone lip,12mm jacket lap;0.4mm field slit and20x1.5mm renewed splice.6mm split guard,5mm backing ring and2mm metal spacers. M4x16 removable bolts,3mm washers,3.5mm blind engagement in5mm backer;4mm tap depth leaves1mm closed wall. Torque0.30Nm;1kN blind-thread proof required. Adhesive carries pressure sealing load; guard does not apply fictitious50kPa compression.


POCKET:2mm own front closureX-512..-510, selected4.76mm closed-cell pad installed3.50 to Pin faceX-506.50, hard spacers and twoM4 nuts. The issued insulation crown intersects this candidate. HOLD the complete interface; do not trim away the front wall or claim an installed pass.

DRAIN: each core has its own18x1 trap,R25 bends, 0.15 mm fishmouth root gaps and D16.2 atmospheric branch bores,180mm centre height difference and164mm effective water seal. Inlet fall200mm. A downstream siphon break and31mm visible air gap precede each separate25x1 drain. Prime before fans;cleanout at lowest point. No connection to pressure-water vents, drains or relief valves.

DISTRIBUTION: open1000x612mm carrier atZ579; no perforated plate installed. RHS10x10x2 runners have four supports each. TwoM5x16 locks close through steel spacers, bypassingPTFE. Lower Pin seat must be removed before straight+X extraction; this predecessor action and service bridge attachment require full route acceptance.

Pocket A / Pin / insulation crown

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

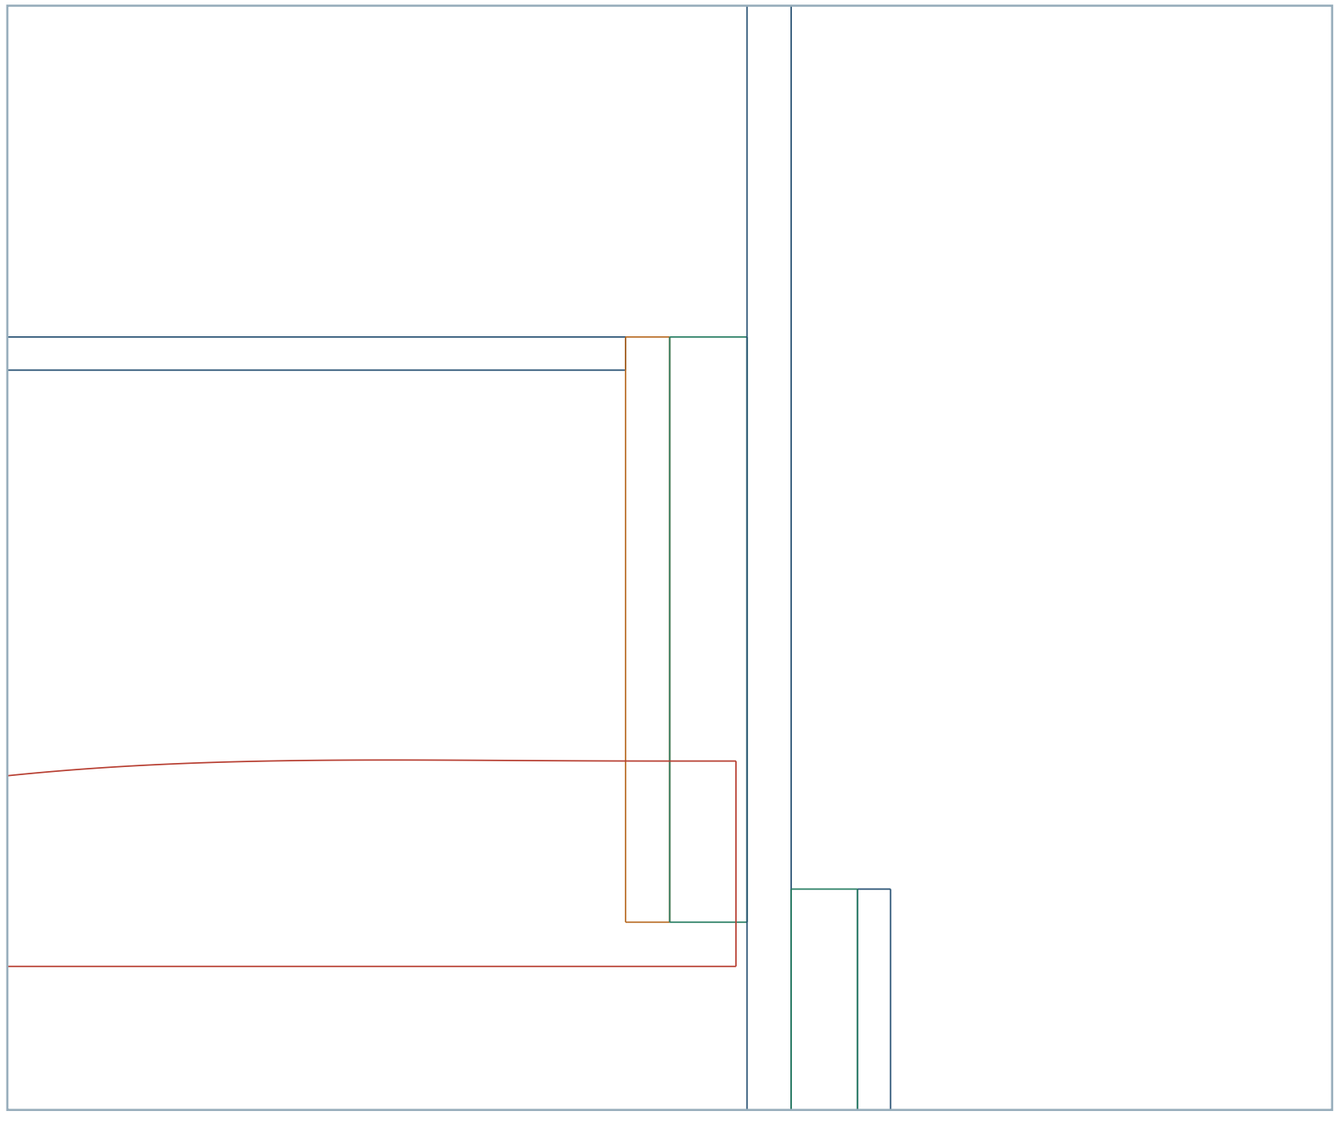

EXACT CAD SECTION
Plane Y=-760.00000 mm
View axes X,Z
Window [-540, 1135, -480, 1185]

Front closure X=-512..-510; Pin face X=-506.5

Replaceable pad free4.76 / installed3.50; twoM4 stops


Actual crown intrusion remains visible: interface HOLD

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

Gland A lower / W1 centre

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

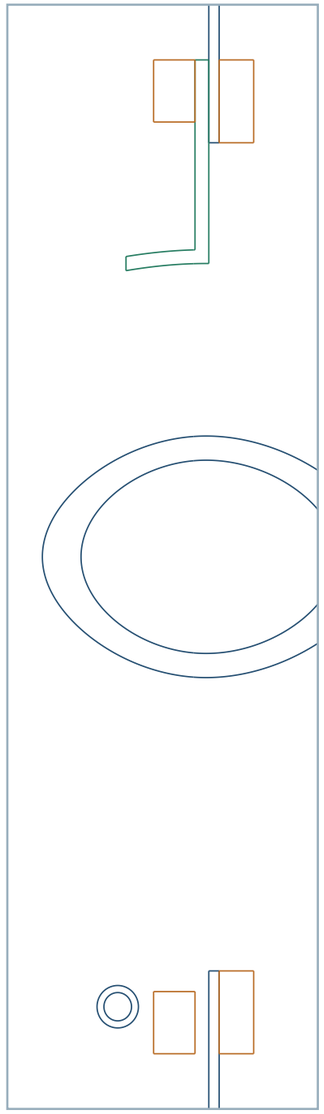

EXACT CAD SECTION
Plane Y=-696.65490 mm
View axes X,Z
Window [-680, 480, -635, 640]

True2mm normal silicone lip;12mm axial jacket bond

6mm guard /2mm stop /5mm backing ring


Guard retention and adhesion are separate load paths

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

Core A lower / clamp and face seal

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

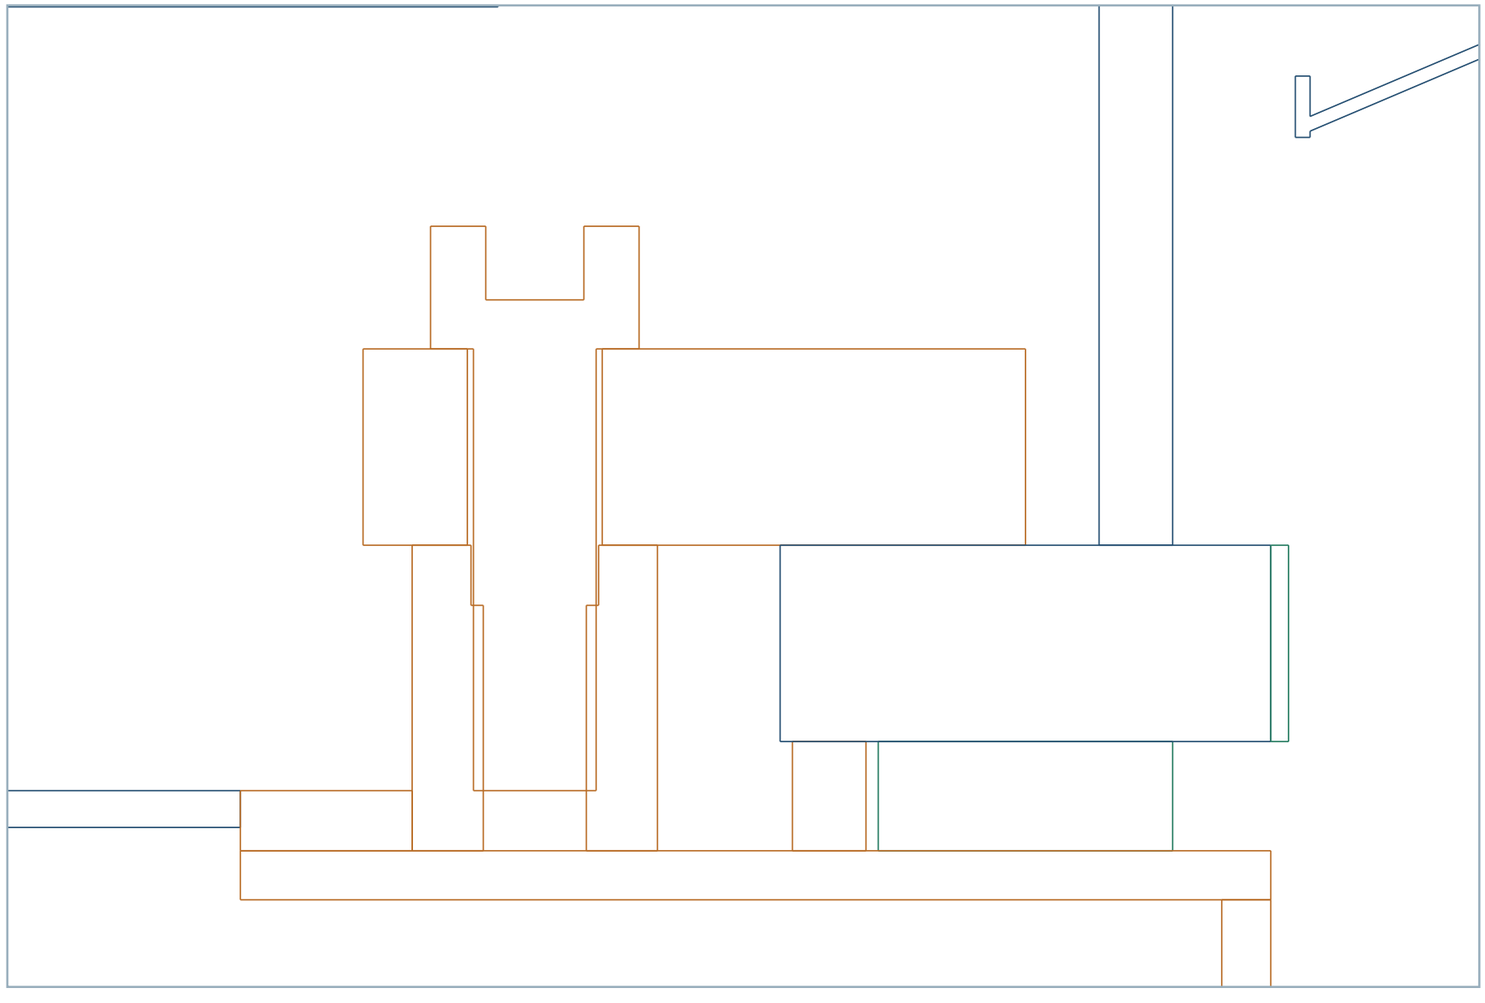

EXACT CAD SECTION
Plane X=550.00000 mm
View axes Y,Z
Window [-790, 610, -730, 650]

Frozen bottomZ620; carrier seal planeZ615.55

6.35mm free sponge at4.45mm installed gap


8mm jaw and independent hard stop; owner load acceptance HOLD

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

A post / sister / prepared web and groove fills

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

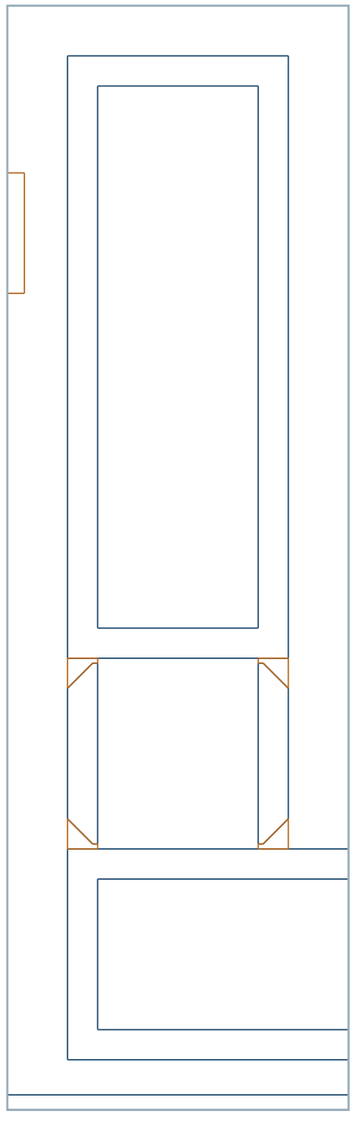

EXACT CAD SECTION
Plane Z=560.00000 mm
View axes X,Y
Window [-646, -850, -612, -740]

Post and22x60x3 sister unchanged

Prepared3mm web;45deg bevel,0.5mm root face/gap


8 CJP seams: a3 / gross269 / effective257; qualified WPS required

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

A lower / bottom end clamp and bearing extension

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

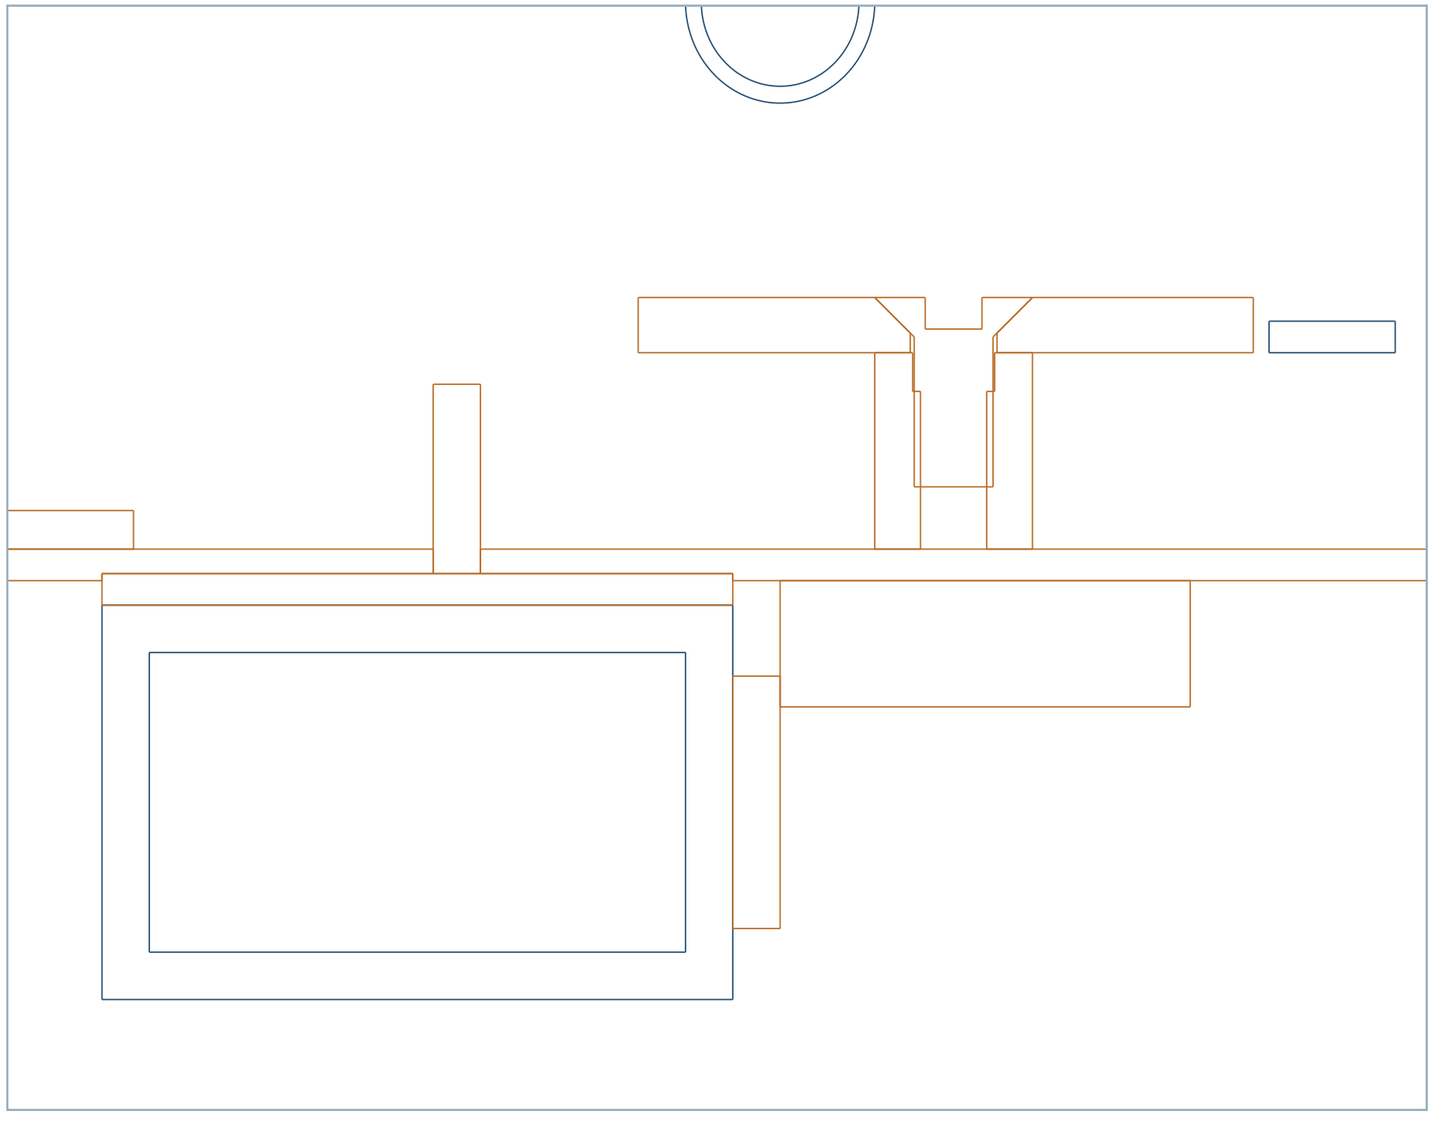

EXACT CAD SECTION
Plane Y=-768.50000 mm
View axes X,Z
Window [-470, 580, -380, 650]

Left YMIN jaw3.5mm; flushM5x12; bottom frame only

8mm bearing shelf and3mm mount on unchanged RHS

Two triangular gussets lie outside this section; see profiles


Full-frame load/tolerance and weld qualification HOLD

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

A lower / independent trap and support

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

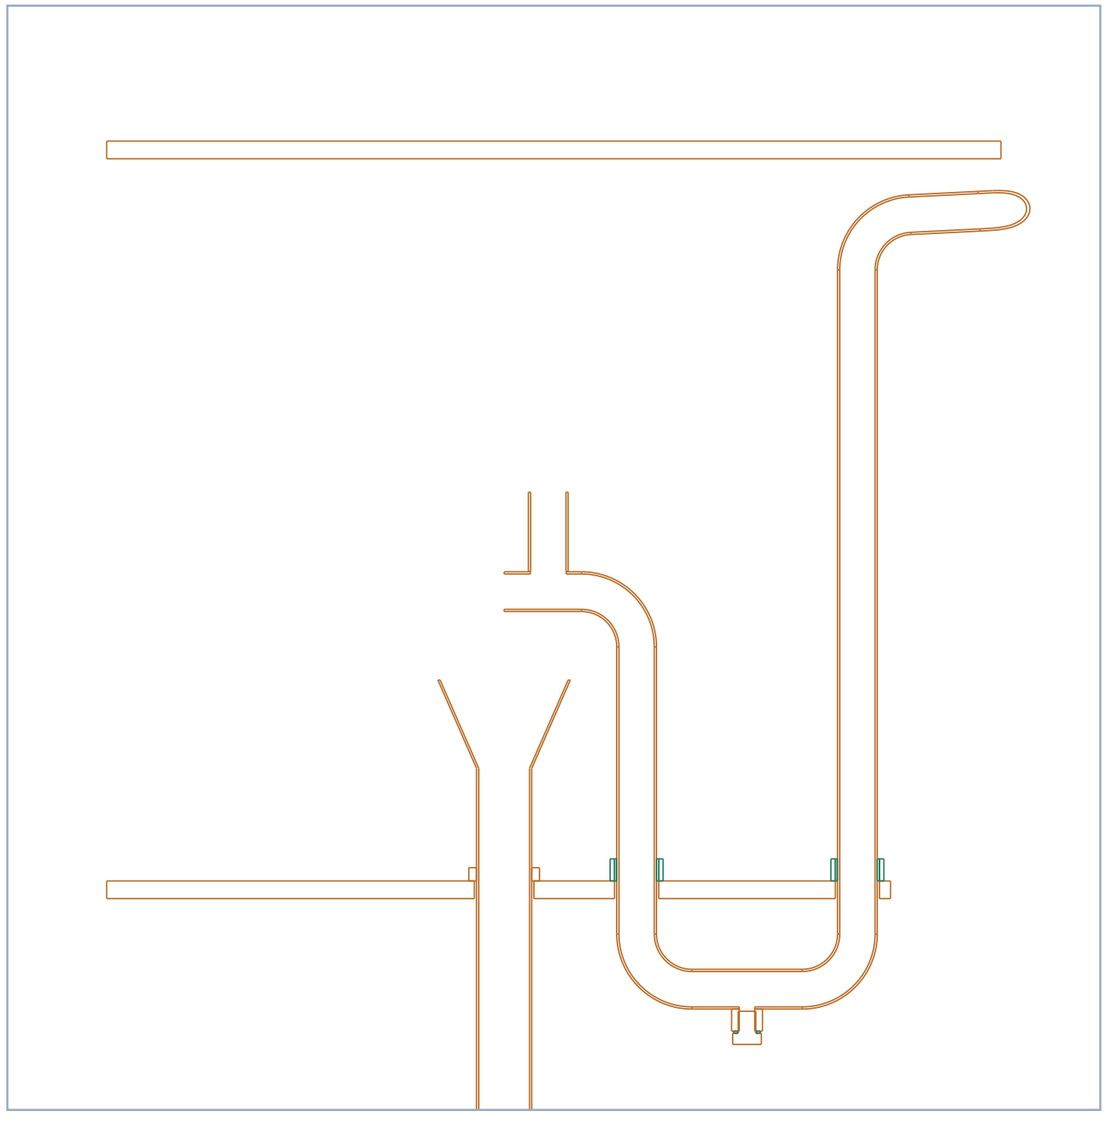

EXACT CAD SECTION
Plane X=-720.00000 mm
View axes Y,Z
Window [-1315, 200, -820, 700]

Lower trap planeX=-720; upper planeX=-680

164mm effective water seal; atmospheric branch and cleanout

Floor-bearing post and shelf; anchoring/test HOLD

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

B lower inlet / upper shelf crossing

CANDIDATE / HOLD - geometry, process qualification and owner interface acceptance are separate

EXACT CAD SECTION
Plane X=-750.00000 mm
View axes Y,Z
Window [570, 570, 985, 660]

Lower inlet routed beyond upper shelf RHS end

Initial50mm1% fall; subsequent route5%fall

Actual section; full route clearance remains in Boolean evidence

Blue: owner/inherited material
Orange: new Shell metal
Green: seal material
Red: installed thermal crown

Full named selection and source SHA in SECTION_MANIFEST.json. This section does not waive any reported penetration.

