
Helvetica Bold 14

Times-Roman 12 italic

Courier 10 bold red

Times-Bold 16 blue

Helvetica 11 black


Courier-Bold 9 green

Helvetica-Oblique 13 gray


Times-Italic 15 dark magenta

Helvetica 9 teal center


Sine Wave

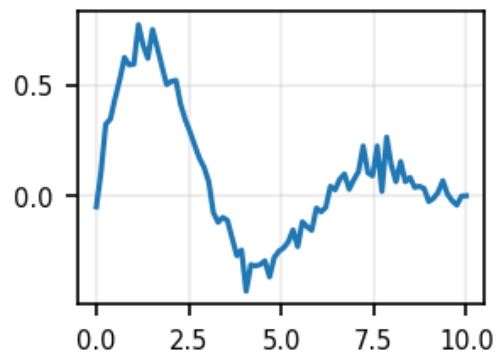


Cosine

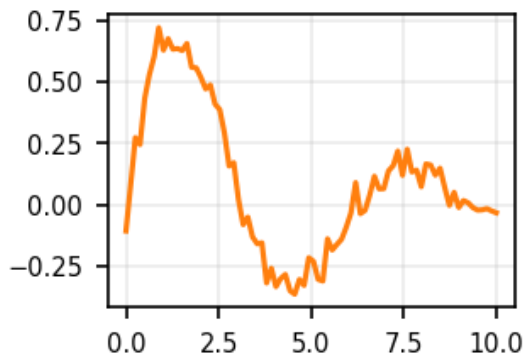


Damped

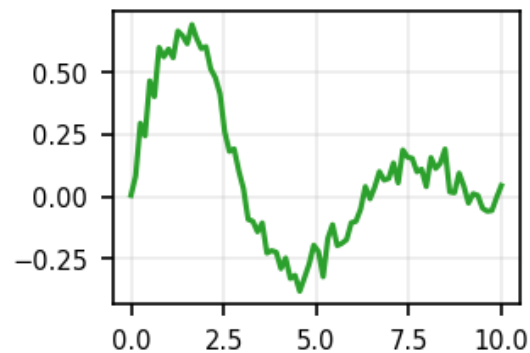


Random Walk

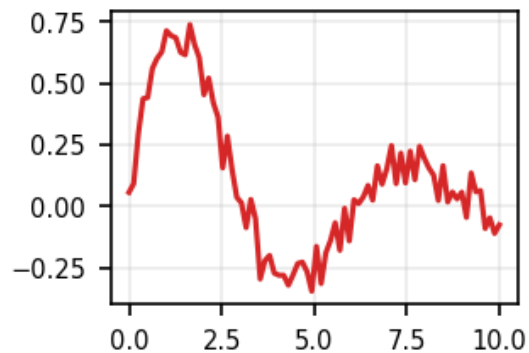

Exponential

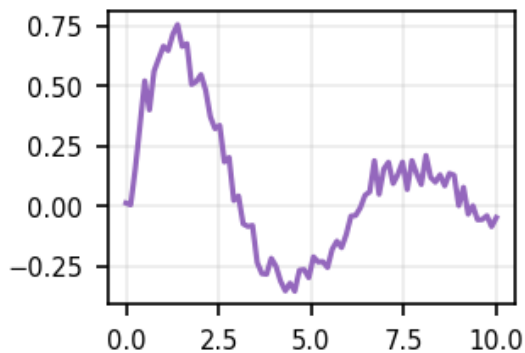




Square Root

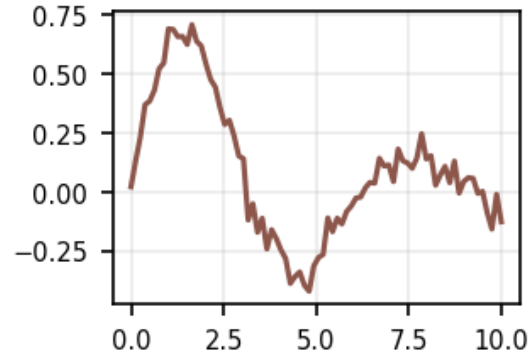

Zebra table

Engineering data

Parameter	Value	Target	Deviation (%)	Status
Efficiency	94.5	92.0	2.7	Pass
Power (kW)	250.0	240.0	4.2	Pass
Temperature (C)	85.3	90.0	-5.2	Warning
Pressure (bar)	101.3	100.0	1.3	Pass

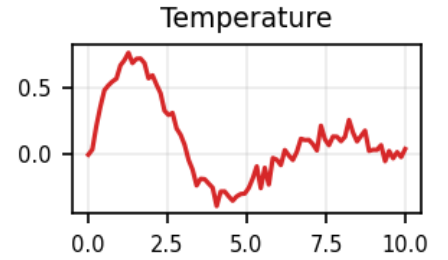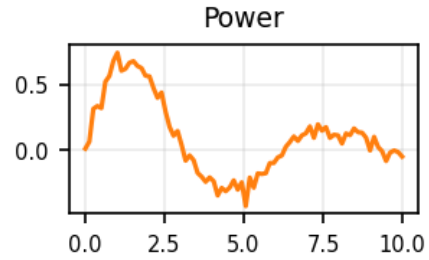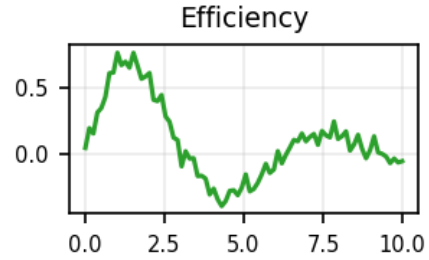

Summary: All systems nominal.

Warnings: 1 Critical: 0

Uptime: 99.8% Status: OK

Component	Status	Temp (C)
Pump	OK	45.2
Valve	OK	38.1
Sensor	Warning	72.8
Actuator	OK	41.5
Controller	OK	36.0

Top panel

Middle panel with info

Bottom panel, all good

A

B

C

D

Technical notes across multiple columns

The simulation converged after 312 iterations. The residual dropped below 1e-6. Mesh quality was adequate.

Temperature distribution shows a maximum gradient of 15 K/m near the leading edge. Further refinement recommended.

Pressure coefficient matches experimental data within 3% across the entire chord. Validation criteria met.

WARNING: Temperature exceeds limits.

All other parameters nominal.

Report generated automatically.