

Title

Subtitle




PROPRIETARY AND CONFIDENTIAL


© Industria de Turbo Propulsores S.A.U (ITP Aero) and/or its affiliates 2026. All rights reserved. This Presentation is provided to the recipient for informational purposes. No representations or warranties are made by ITP Aero or its direct and indirect equity holders and their respective affiliates as to the accuracy of the information contained herein and any guidance and/or projections. The information in this document shall not be used for any purpose other than that for which it is supplied, nor disclosed without the express previous written consent of Industria de Turbo Propulsores S.A.U. and/or its affiliates.

Título


default:(STRETCH, STRETCH)

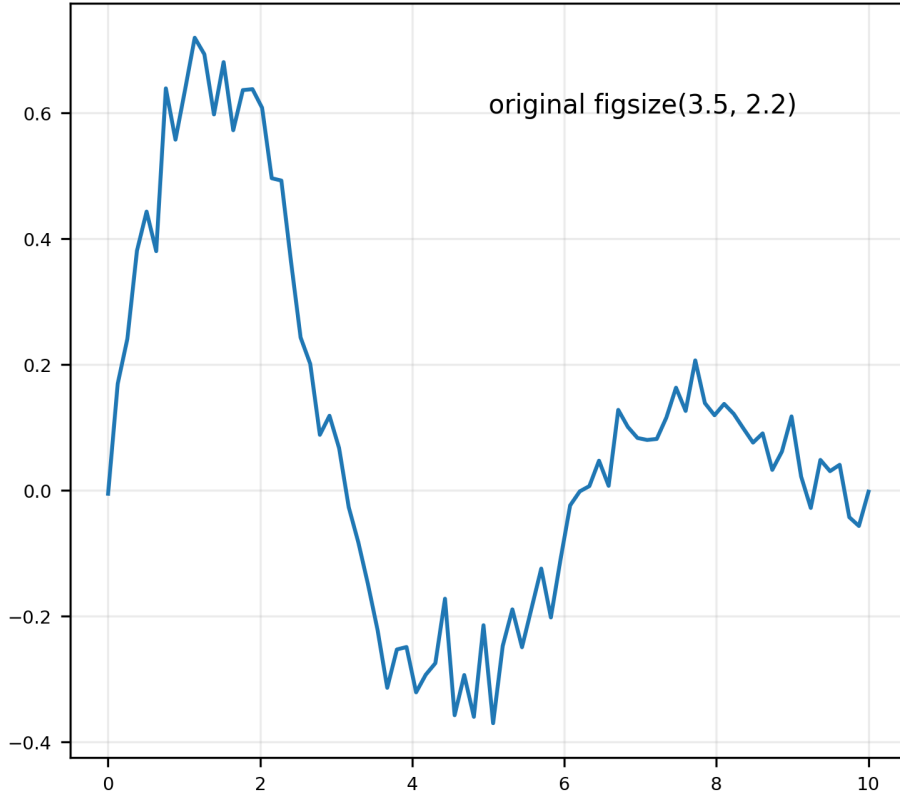

default:(STRETCH, STRETCH)

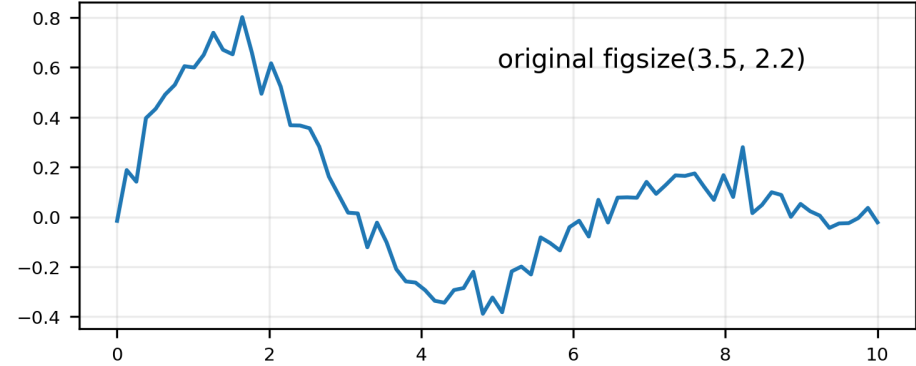


default:(STRETCH, STRETCH)

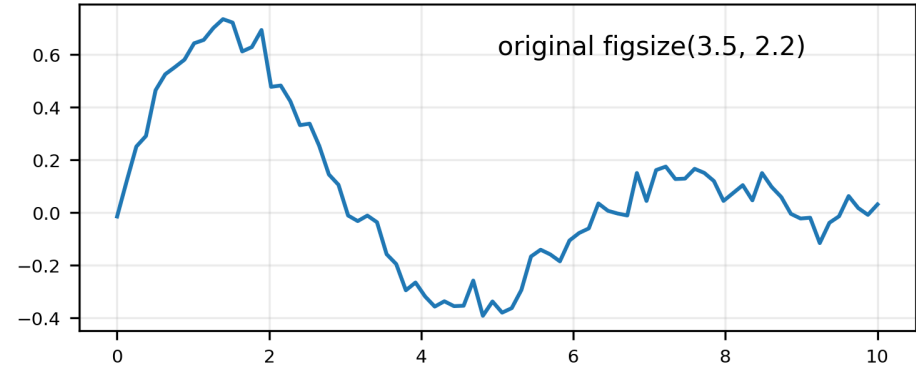


Título


default:(STRETCH, STRETCH)

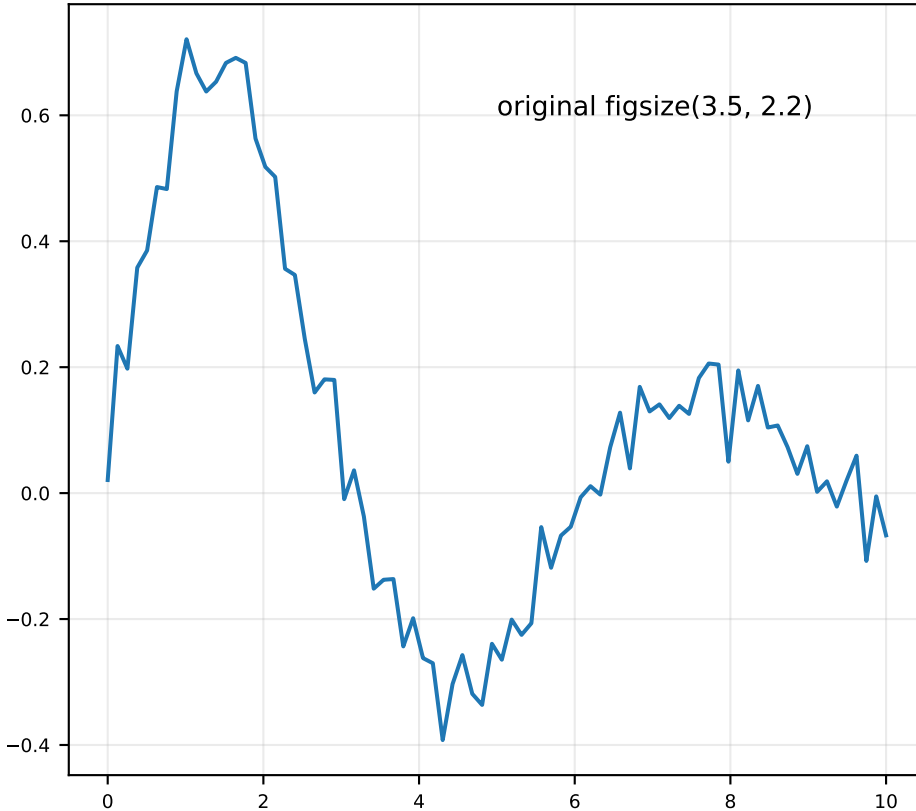

default:(STRETCH, STRETCH)

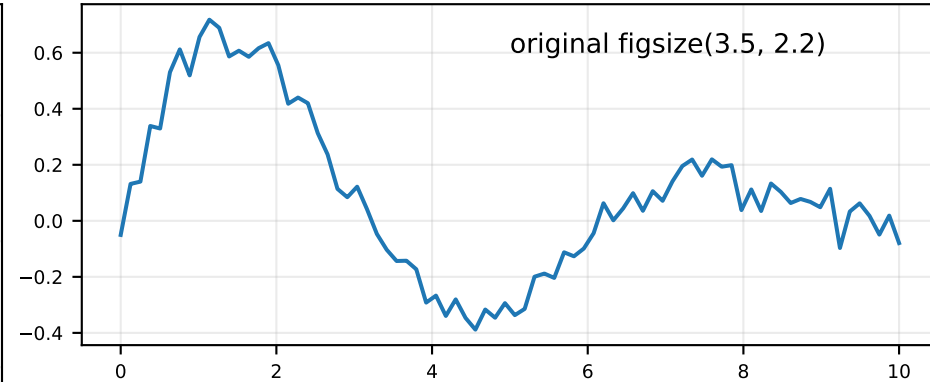


default:(STRETCH, STRETCH)

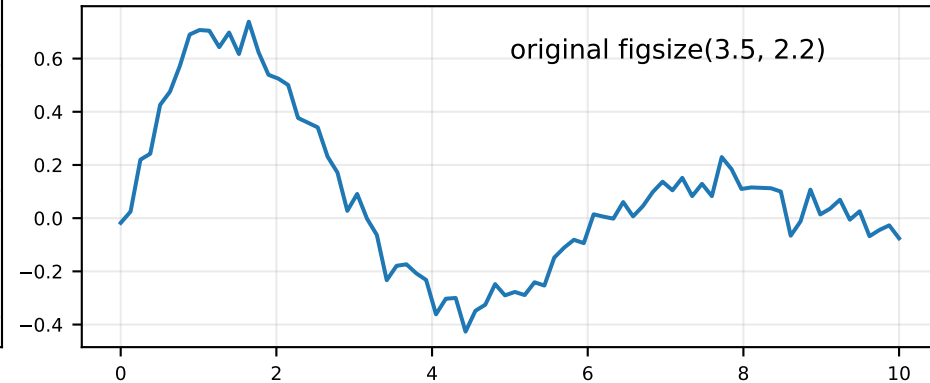


Título

default:(STRETCH, STRETCH)

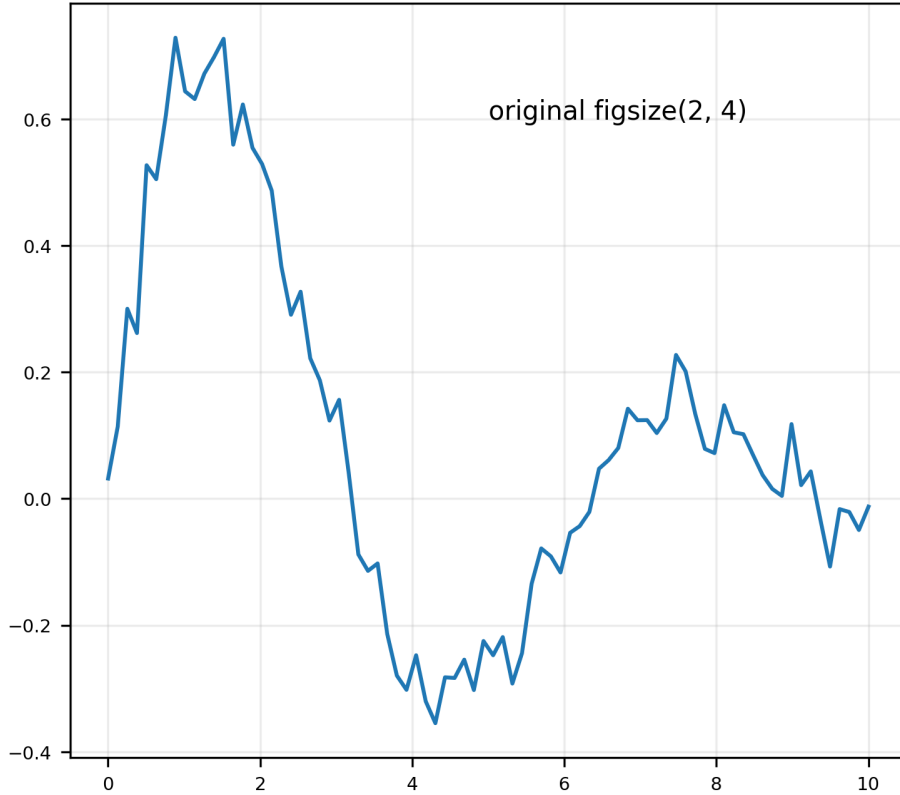


(STRETCH, MIDDLE)

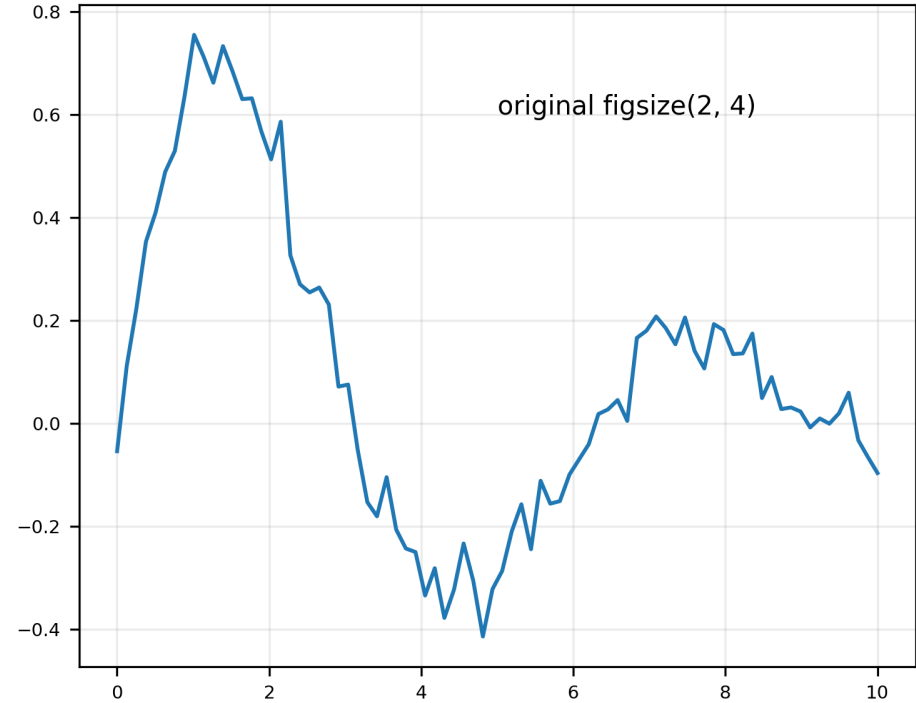


Título

default:(STRETCH, STRETCH)

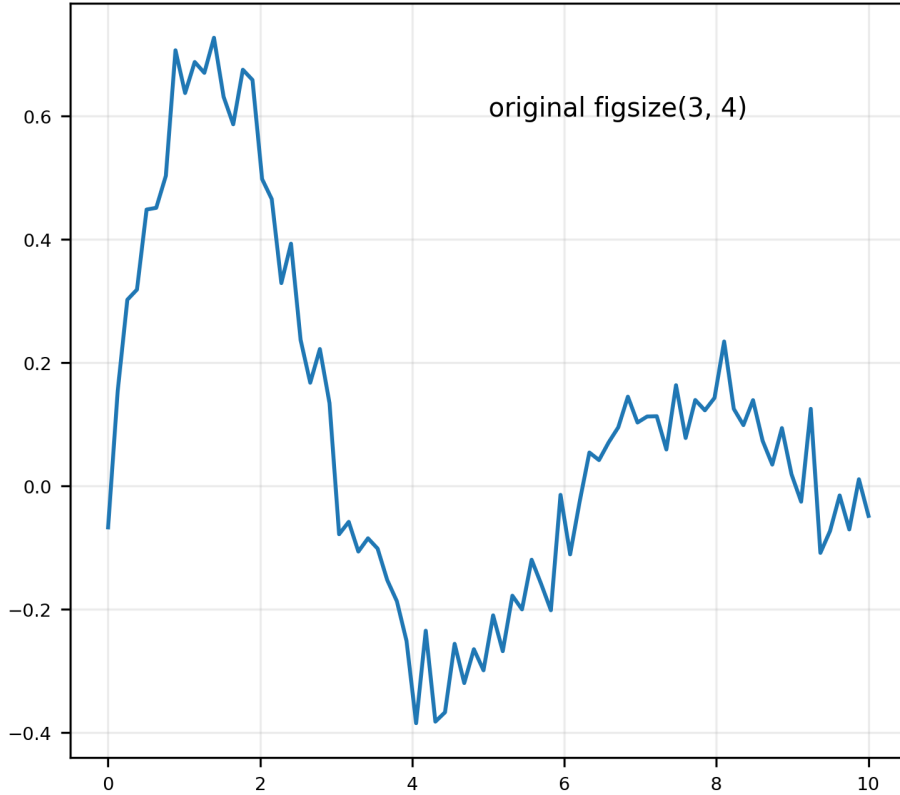


(CENTER, STRETCH)

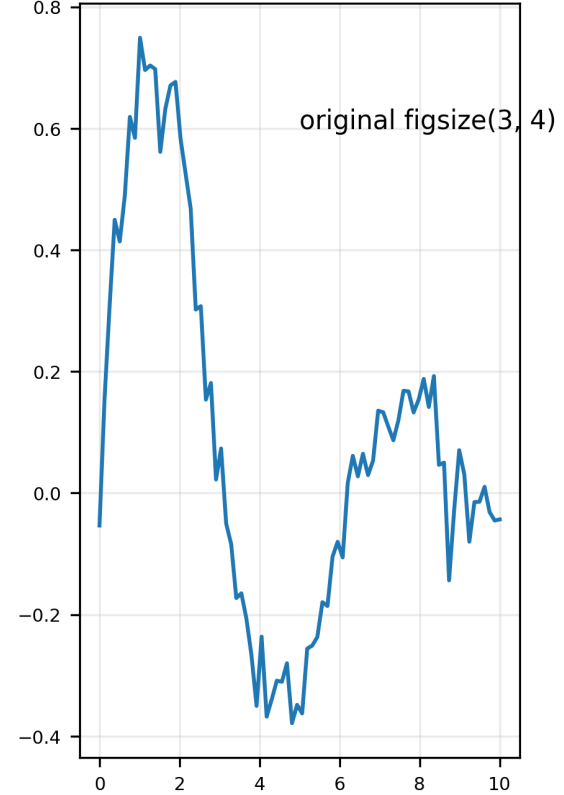


Título



default:(STRETCH, STRETCH)

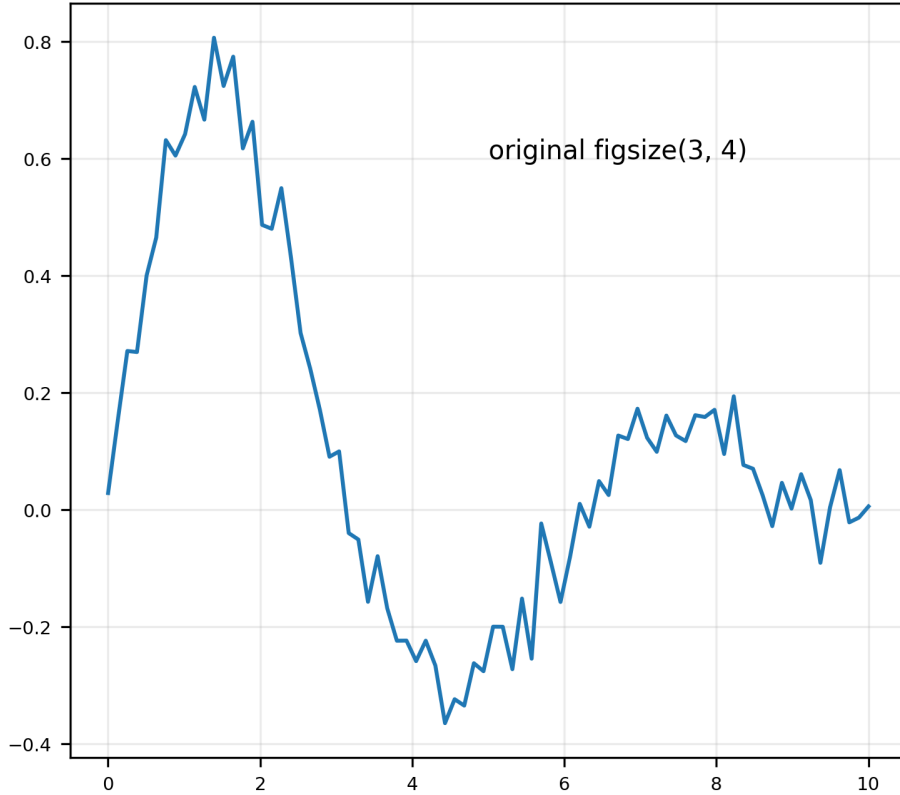


(CENTER, STRETCH)

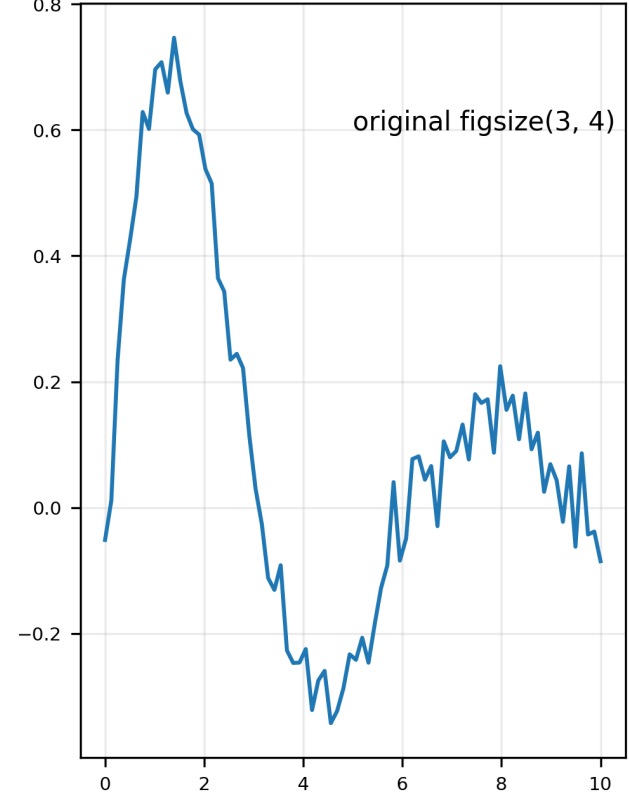


Título

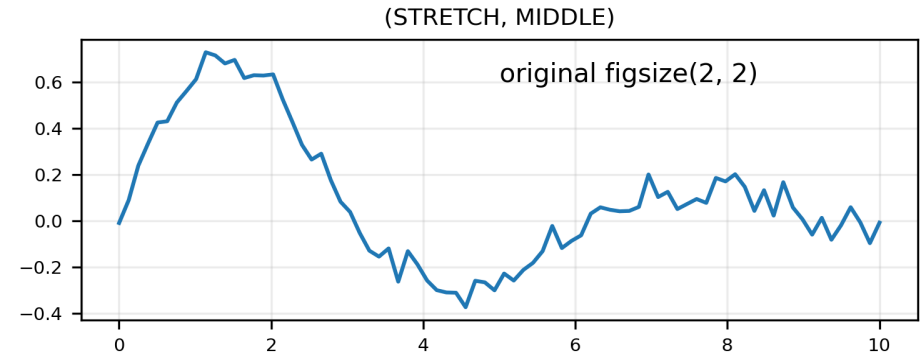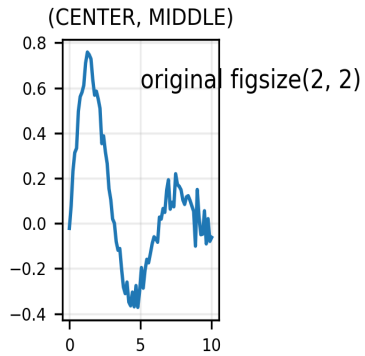

Título

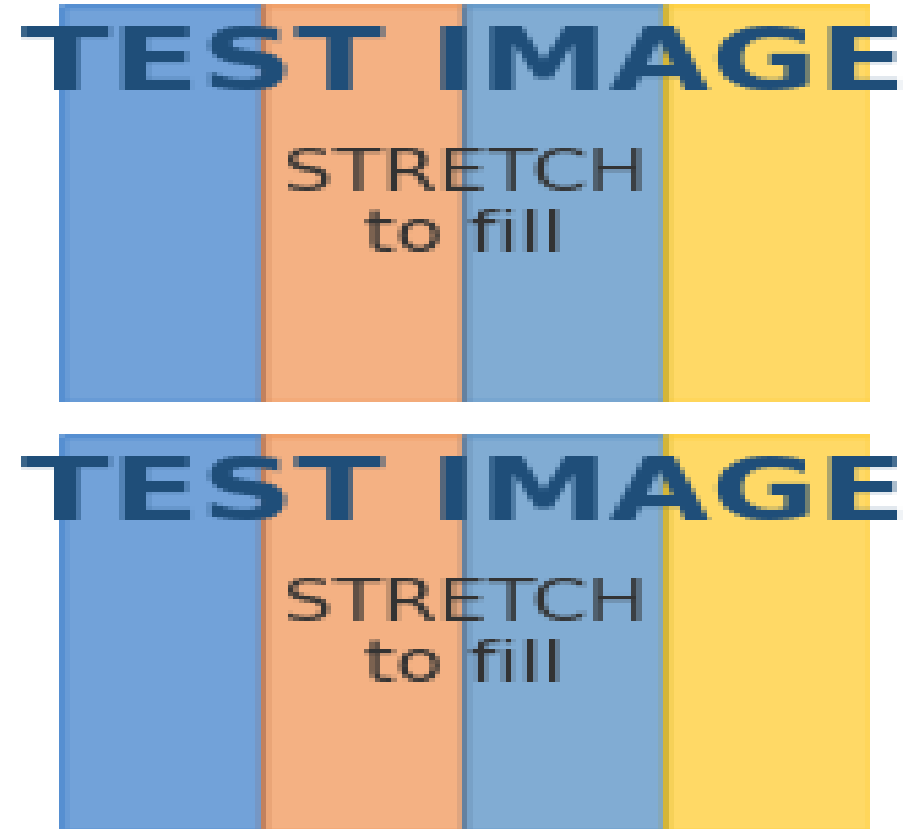

Título

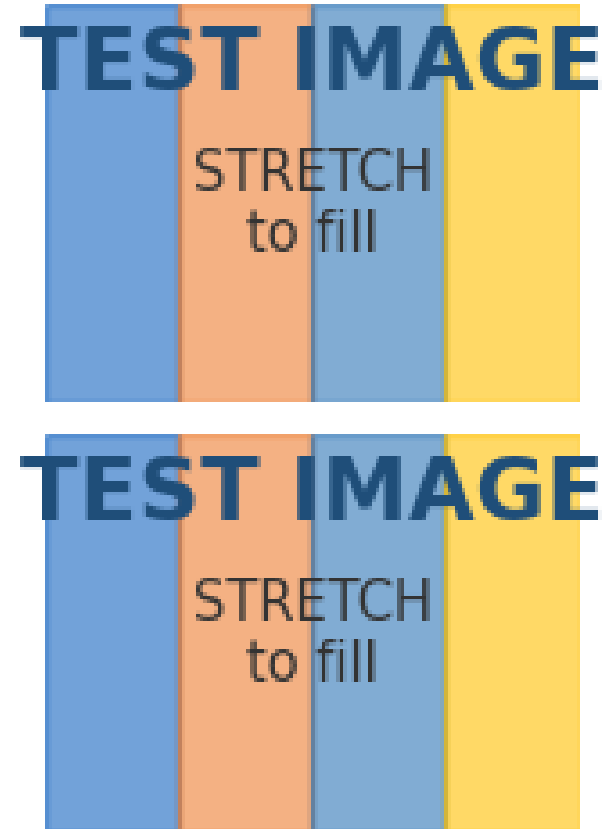

Mixed **formatting** *in* one **text**
element.

Different **fonts**, *sizes*, and **colours** *in the same paragraph.*

Left-aligned paragraph.

Centred paragraph.
Second line centred.

Right-aligned paragraph.

Multi-line with
forced line breaks
and mixed **bold** spans.

Text — cell alignment (HAlign × VAlign)

LEFT
TOP

CENTER
TOP

RIGHT
TOP

LEFT
MIDDLE

CENTER
MIDDLE

RIGHT
MIDDLE

LEFT
BOTTOM

CENTER
BOTTOM

RIGHT
BOTTOM

Item	Value	Factor	Count	Price
Alpha	1234.567	1.2345	42	19.99
Beta	89.123	0.9876	137	249.5
Gamma	4567.89	2.3456	8	0.05
Delta	12.34567	0.1234	256	1299.0

Item	Value	Factor	Count	Price
Alpha	1234.57	1.234	42	\$19.99
Beta	89.12	0.988	137	\$249.50
Gamma	4567.89	2.346	8	\$0.05
Delta	12.35	0.123	256	\$1299.00

Tables — merged cells (colspan & rowspan)

Consolidated Revenue Report (kEUR)			
Division	Project	Q1	Q2
Aero	Alpha	120	135
	Beta	95	88
Marine	Gamma	200	180
	Delta	55	72

Tables — conditional formatting

Sensor	Temp (C)	Pressure (kPa)	Flow (kg/s)
T1	85	101.3	12.5
T2	92	98.7	11.8
T3	78	105.2	13.2
T4	105	95.0	10.5
T5	88	102.8	12.1

Component	Max Stress (MPa)	Fatigue Life (cycles)	Safety Factor
Blade A	450	12000	1.8
Blade B	520	8500	1.5
Disc	380	22000	2.2
Casing	290	45000	2.8
Seal	180	60000	3.5

Test	Efficiency (%)	Vibration (mm/s)	Status
Run-1	94.2	0.12	Pass
Run-2	97.1	0.08	Pass
Run-3	91.5	0.45	Warning
Run-4	88.3	0.92	Fail
Run-5	96.8	0.15	Pass

Machine	Power (kW)	Efficiency	Temp Rise (°C)
Comp-1	2500	0.88	45
Comp-2	2300	0.92	38
Turb-1	4200	0.94	52
Turb-2	3900	0.91	48
Fan-1	1800	0.85	32

Sensor	Temperature (Celsius)	Pressure (kPa abs)	Mass Flow Rate (kg/s)
T1	85	101.3	12.5
T2	92	98.7	11.8
T3	78	105.2	13.2
T4	105	95.0	10.5
T5	88	102.8	12.1

Sensor	Temperature (Celsius)	Pressure (kPa abs)	Mass Flow Rate (kg/s)
T1	85	101.3	12.5
T2	92	98.7	11.8
T3	78	105.2	13.2
T4	105	95.0	10.5
T5	88	102.8	12.1

Component ID	Max Principal Stress (MPa)	Fatigue Life (thousand cycles)	Safety Factor (—)
Blade A	450	12.0	1.8
Blade B	520	8.5	1.5
Disc	380	22.0	2.2
Casing	290	45.0	2.8
Seal	180	60.0	3.5

Machine Unit	Shaft Power (kW)	Isentropic Efficiency	Temperature Rise (deg C)
Comp-1	2500	0.88	45
Comp-2	2300	0.92	38
Turb-1	4200	0.94	52
Turb-2	3900	0.91	48
Fan-1	1800	0.85	32

Sensor	Temperature (Celsius)	Pressure (kPa absolute)	Mass Flow Rate (kg/s)
T1	85	101.3	12.5
T2	92	98.7	11.8
T3	78	105.2	13.2
T4	105	95.0	10.5
T5	88	102.8	12.1

Sensor	Temperature (Celsius)	Pressure (kPa absolute)	Mass Flow Rate (kg/s)
T1	85	101.3	12.5
T2	92	98.7	11.8
T3	78	105.2	13.2
T4	105	95.0	10.5
T5	88	102.8	12.1

Component ID	Max Principal Stress (MPa)	Fatigue Life (thousand cycles)	Safety Factor (—)
Blade A	450	12.0	1.8
Blade B	520	8.5	1.5
Disc	380	22.0	2.2
Casing	290	45.0	2.8
Seal	180	60.0	3.5

Machine Unit	Shaft Power (kW)	Isentropic Efficiency	Temperature Rise (deg C)
Comp-1	2500	0.88	45
Comp-2	2300	0.92	38
Turb-1	4200	0.94	52
Turb-2	3900	0.91	48
Fan-1	1800	0.85	32