

GLOBAL CAMERA SPECS

Frame rate: 25 fps
HIGH SPEED 660 fps TBC
Framing Aspect Ratio: 2.35:1
Squeeze Factor: 2x - 1x

SOUND CAPTURE

Recorder: Sound Devices 688 + 633
Track info: L: Boom/R: Radio-mic mixdown
Isolated track: Poly .wav
Sample rate: 24bit - 48Khz
Frame rate: 25fps

CAMERA SPECS



A Camera: ARRI ALEXA 35 (EXTREME license on call)
Resolution: 4.6K - (2K for HIGH SPEED 660 fps)
Format Aspect Ratio: 3:2 Open Gate
Codec: ARRIRAW/ARRICORE
Color Space: ARRI Wide Gamut 4
Gamma: ARRI LogC4

B Camera: ARRI ALEXA 35
Resolution: 4.6K
Format Aspect Ratio: 3:2 Open Gate
Codec: ARRIRAW
Color Space: ARRI Wide Gamut 4
Gamma: ARRI LogC4

Optics:  Cooke Anamorphic/i 2x
Canon 15.5-45mm Spherical*
Canon 30-300mm Spherical*

Card Type: CODEX Compact Drive

*TBC

NOTE: Any other Camera must be approved

STORAGE ESTIMATES "A" + "B" CAMERAS (MAIN CAMERAS)

Camera model: ARRI ALEXA 35

Estimated number of shoot days: 65*

Format Datarate RAW (GB/h): 1045 - High Density Encoding

Estimated RAW footage per day: 120 minutes

Estimated RAW data per day: 2TB

Estimated RAW total size of project: 130TB


ON SET HARD DRIVES

- Purpose: MASTER RAID 5
Type: G-RAID SHUTTLE 8 Thunderbolt 3
Capacity: 160TB
RAID 5 Capacity: 140TB
Quantity: 1x
- Purpose: SHUTTLE
Type: SanDisk Extreme Pro SSD USB-C
Capacity per unit: 4TB
Quantity: 4x
- Purpose: TEMPORARY
Type: G-RAID SHUTTLE 8 Thunderbolt 3
Capacity per unit: 160TB
Quantity: 1x



LAB ARCHIVE

- Purpose: Master LTO
Type: LTO-7 tape, uncompressed
Capacity: 6TB
Checksum: MD5
- Purpose: LAB Backup RAID
Type: G-RAID SHUTTLE 8 Thunderbolt 3
Capacity: 160TB
Quantity: 1x



BARCODING & NAMING

According to format used by LAB

TP	M/C	XXX
First two letters represent the project	Third letter represents the Master or Clone copy (M or C)	Final three digits represent the tape number.

EXAMPLE; first set of Master and Clone tapes:


TPM001


TPC001

Drive copies will be named as:

PROJECT_NAME_DRIVE_01

Where '01' represents the first drive of the set.

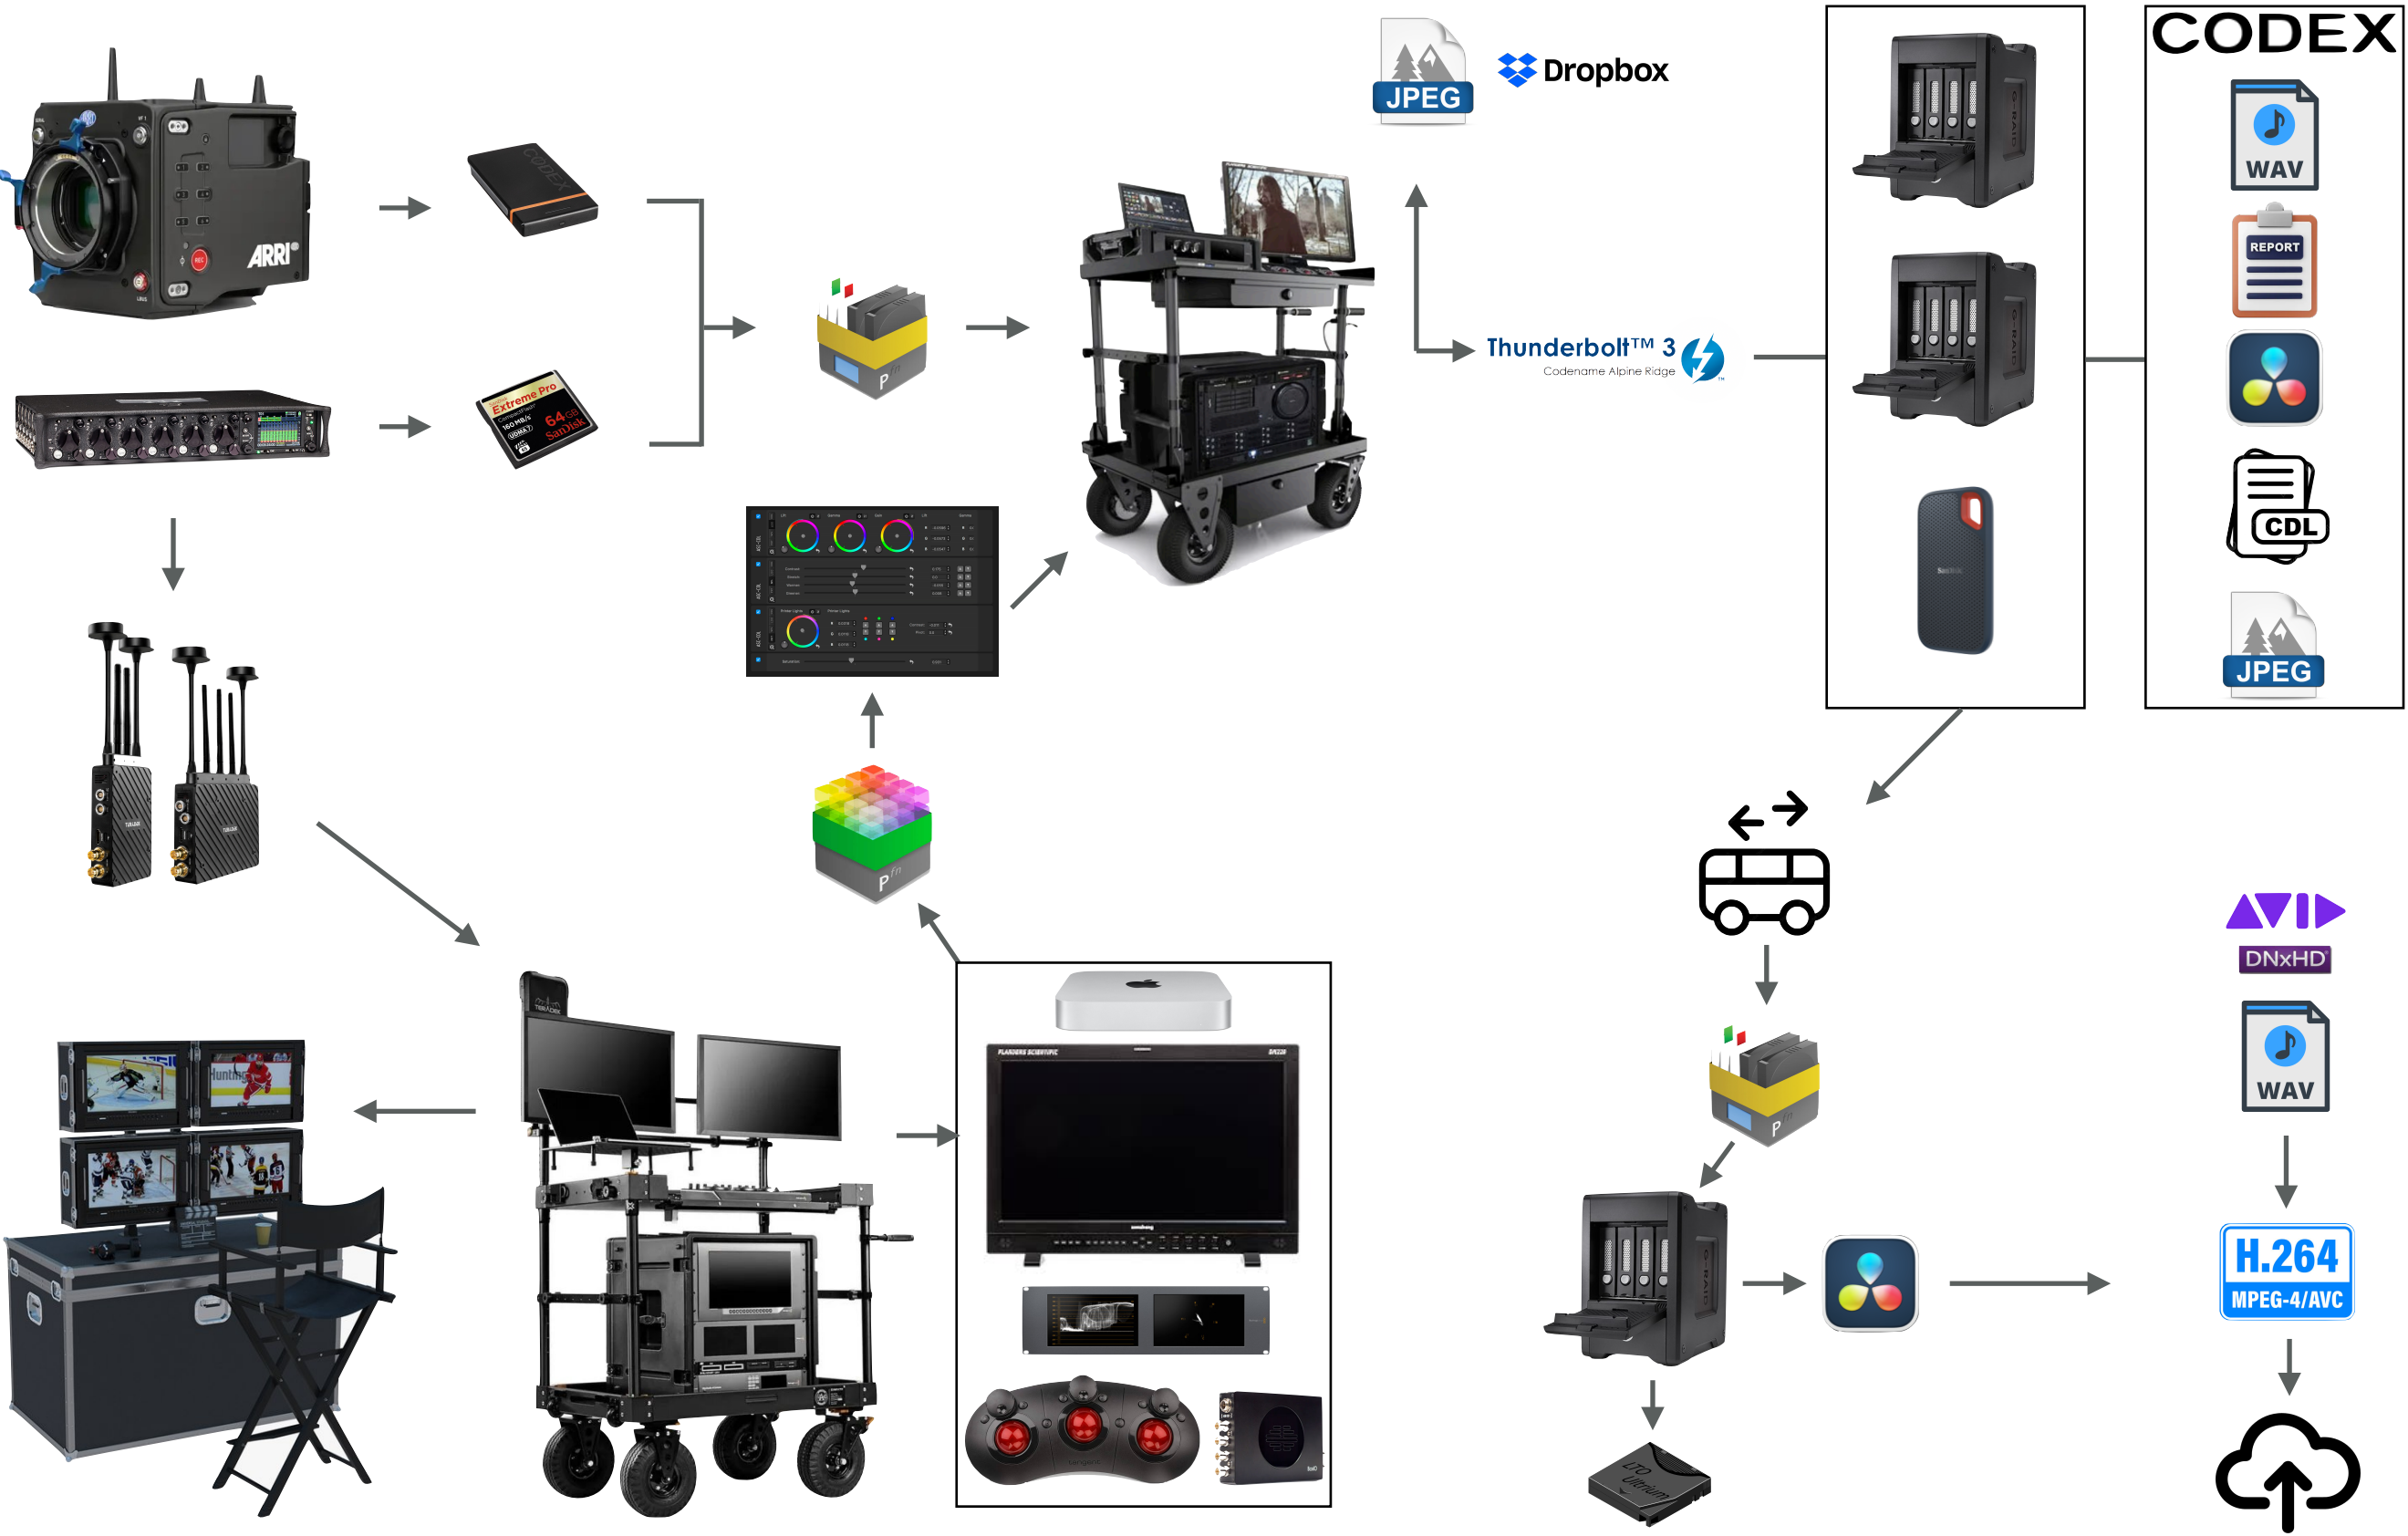

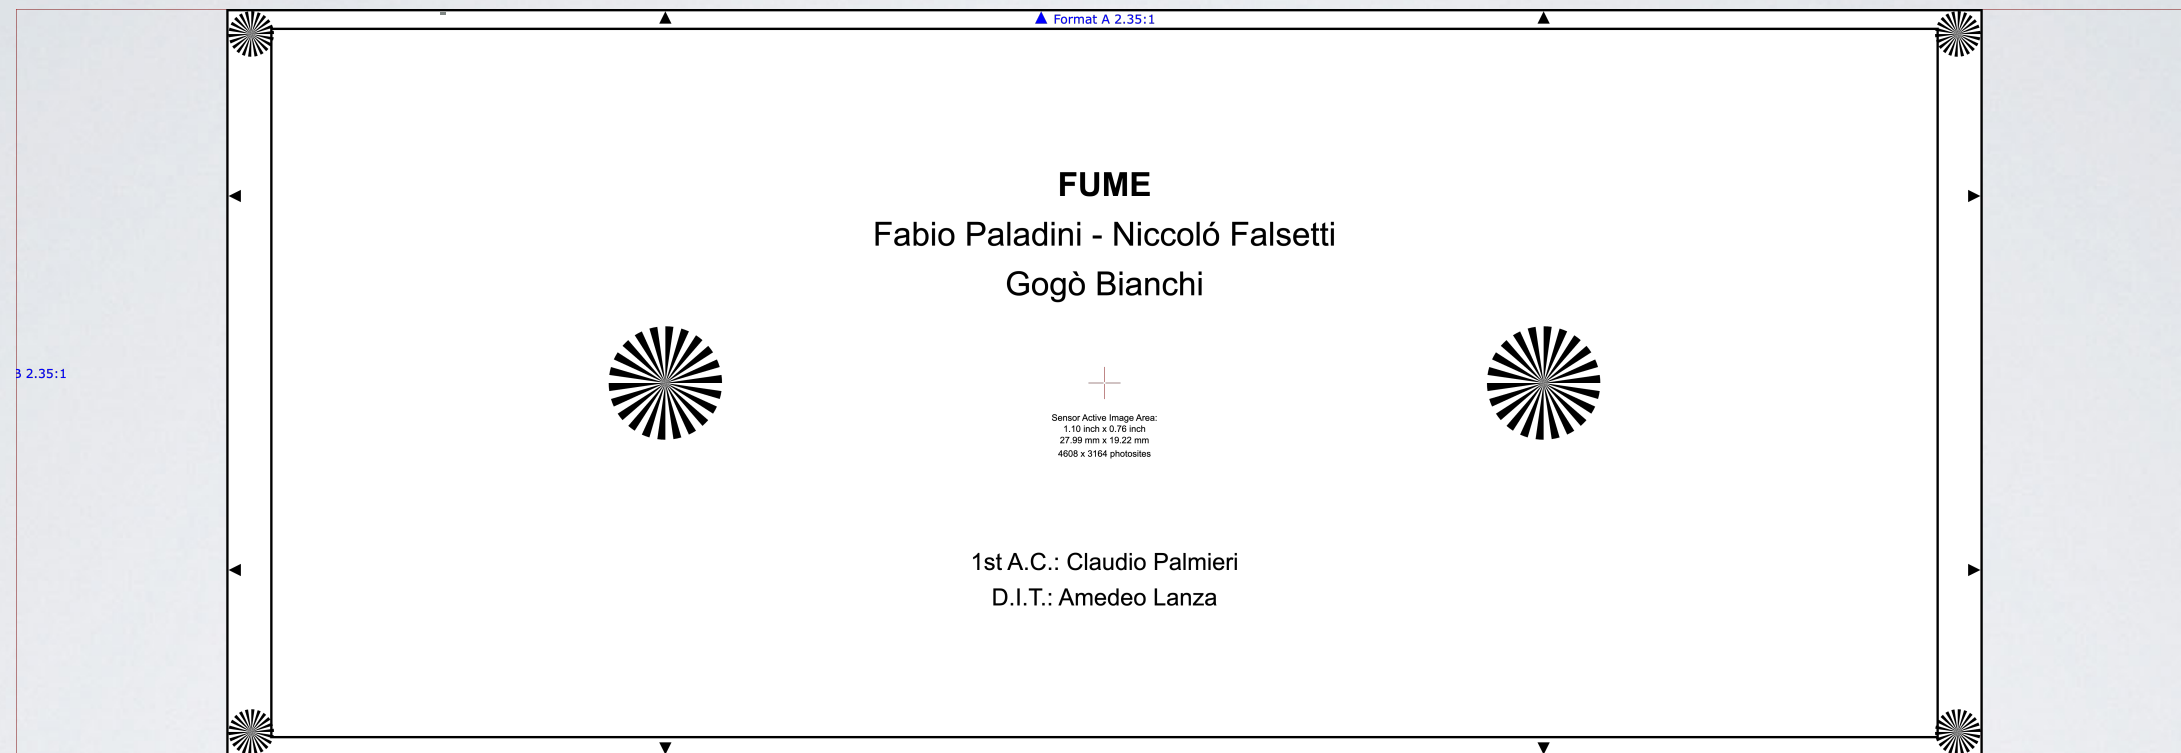**ARRI**

Sensor Area - 4608X3164


Safety Area for Resize & Crop - 3718x3164

Framing Area - 3532x3006

Framing Aspect Ratio: 2.35:1

Safety Area vs Framing Area percentage: 5%

Lens Squeeze Factor: 2x

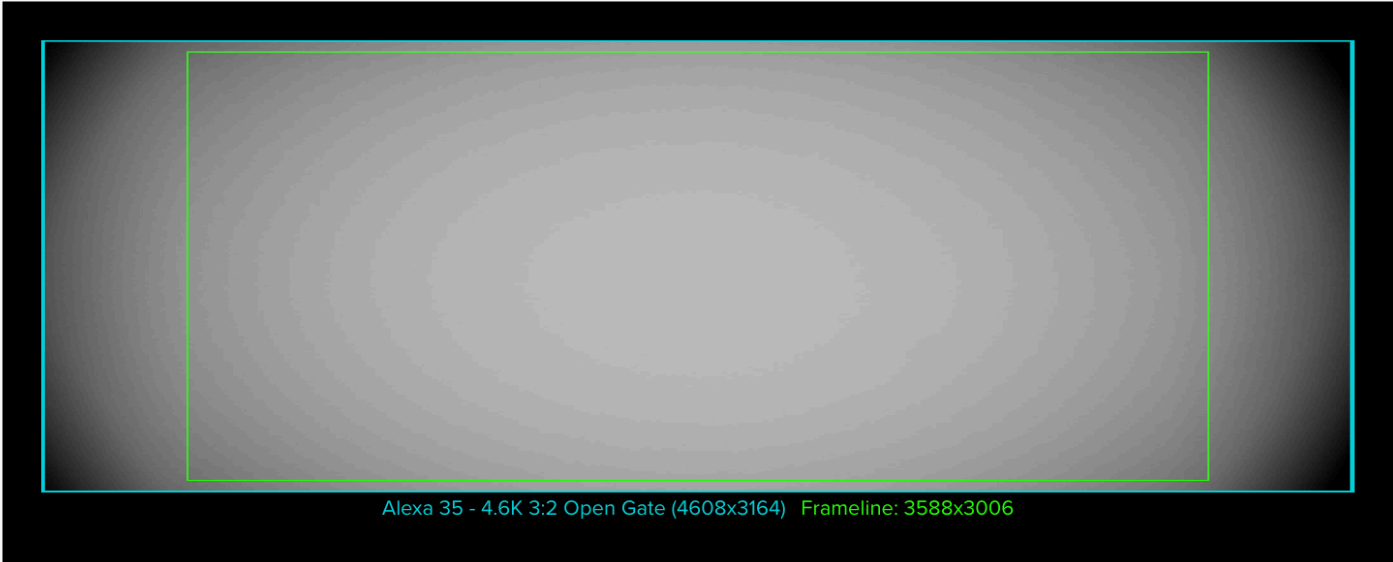

Alexa 35 - 4.6K 3:2 Open Gate (4608x3164) Frameline: 3588x3006

ARRI Alexa 35 4.6K 3:2 Open Gate

[VIEW PRODUCT](#)

Resolution: 4608x3164
Dimensions: 27.994mm (H) x19.221mm (V) x 33.957mm (diagonal)
Pixel Pitch: 6.075 Microns
Ratio: 3:2
De-squeezed Ratio: 6:2
FOV: 58.5° (H) 21.8° (V)

Cooke Anamorphic/i (50mm)

T-Stop: 2.3
Image Circle: 33.54mm
Close Focus: 2.75ft
Front Diameter: 110mm
Weight: 3600.00g
Length: 195.00mm
Focus Throw: 300°
Aperture Blades: 11
Mount: PL
Interchangeable Mount: No
Additional Info: 2x Anamorphic

PRINT

Restart

Please select your camera

ARRI

Alexa 35

4.6K 3:2 Open Gate

Please select your lens


Cooke

Anamorphic/i

50

Infinity T2.3

Some lenses may vignette. Crop & scale up to 5% required

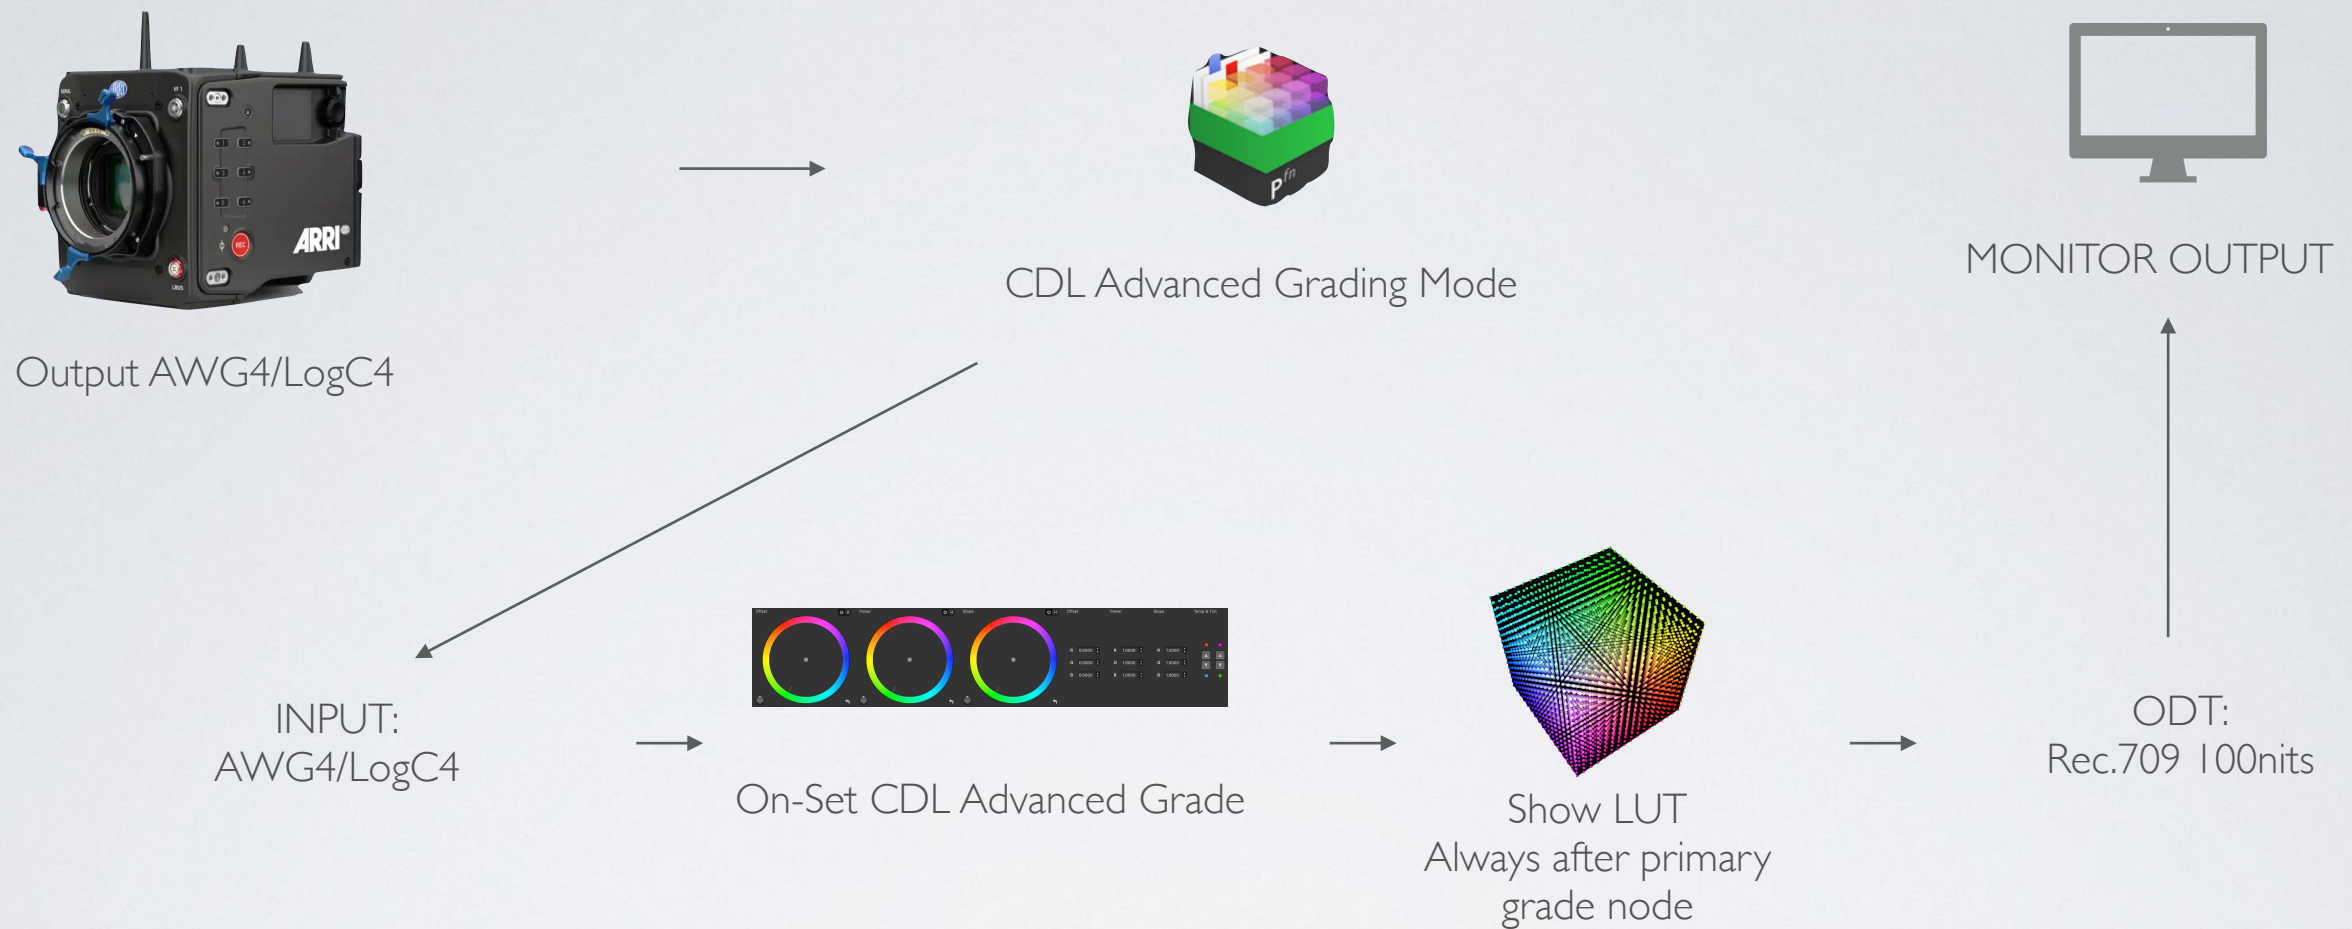

LMT/LUT INFORMATION

LUT for Resolve: FM_LMT_ACEScct_to_ACEScct_Chromogen_x65_v01.cube

LUT for Livegrade: FM_LMT_ACEScct_to_ACEScct_Chromogen_x17_v01.cube

LUT for Teradek & Monitor: FM_LUT_logC4_to_rec709_Chromogen_x17_v01.cube

Software: DaVinci Resolve - Pomfort Livegrade - Pomfort Silverstack

Working Space: ACES 2

3 different LMTs applied according to scene (MAIN - FLASHBACK WARM - FLASHBACK COLD)

Range Transform (Livegrade controls signal range):

ARRI: Camera OUT as LEGAL - LUT box IN as LEGAL to LEGAL - Livegrade IN as LEGAL to LEGAL - MONITOR IN as LEGAL

FOLDER STRUCTURE EXAMPLE

OCF: Original camera files

PROJECT_CDLS: Resolve Project for LAB + CDLs

REPORTS: Report files from Livegrade & Silverstack

SOUND: Original sound files

STILLS: Grab stills from Resolve or Livegrade (reference for LAB/EDITING)





FOLDER STRUCTURE NOTES

Second Unit/Splinter Unit labelled according to DIT/DATA



Drone Unit/Camera labelled as "D" Cam

Underwater Unit/Camera labelled as "U" Cam

Other Unit/Cam labelled according to DIT/DATA

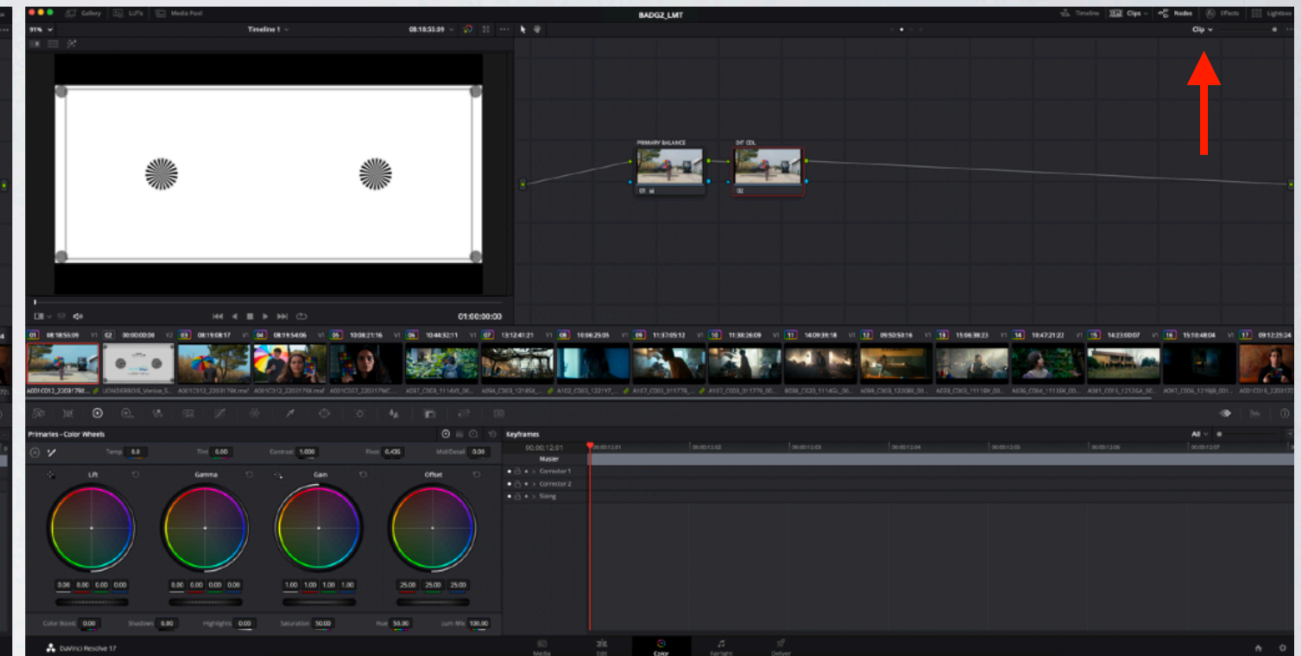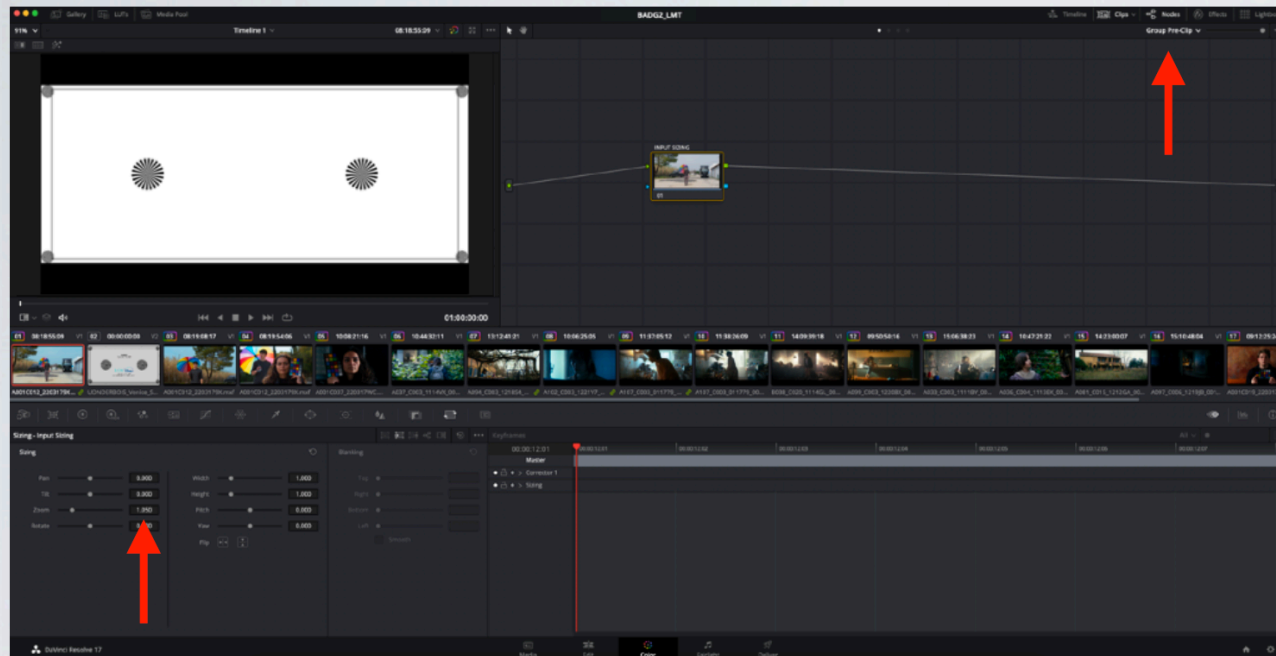

in Camera RAW if present on Resolve project sent from set

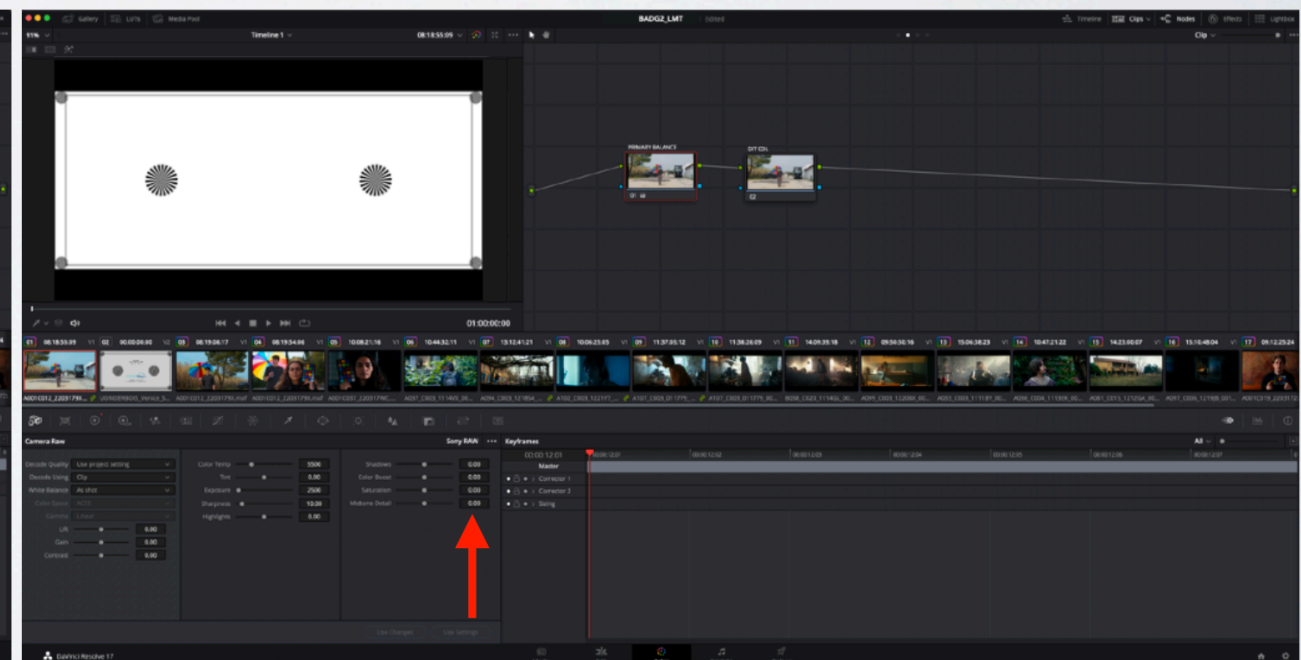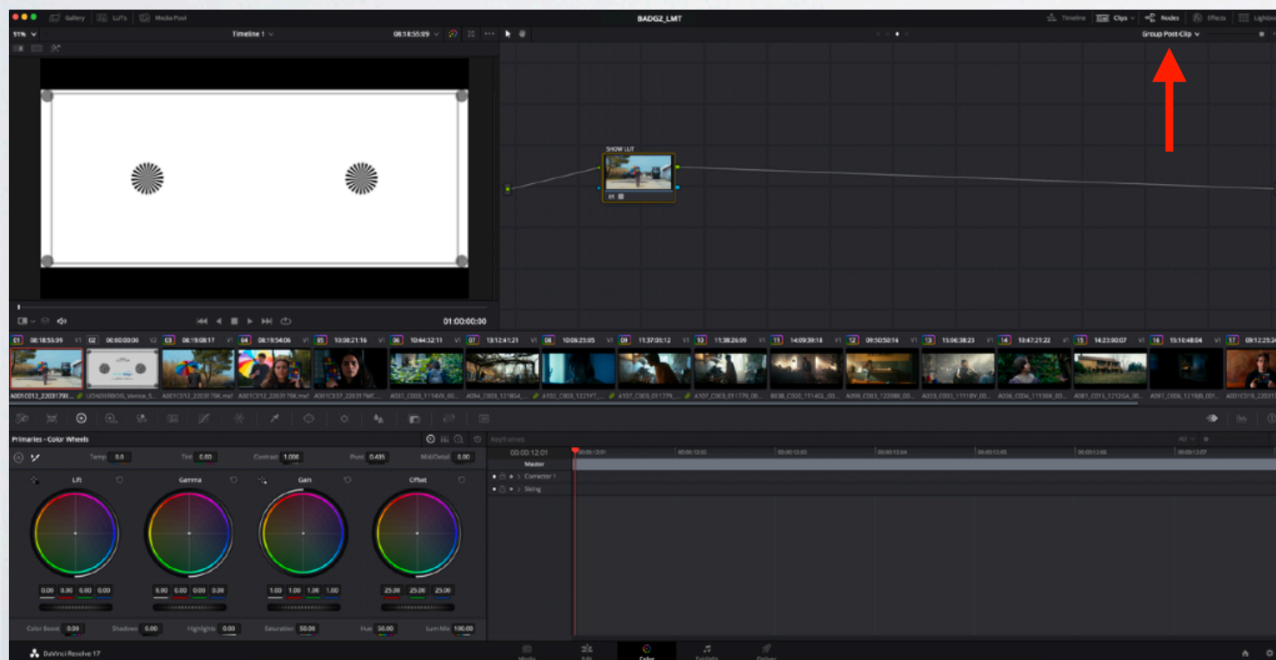

TRANSCODES FORMAT



Format: Dnx36HD Proxy*
File Naming: Source Clip Filename
Framing: 2.35:1
Resolution: 1920x817 pixels
Color: As per Dailies grade (CDL or LUT)
Timecode: As per source TC
Burn-Ins: Name Clip + Source Timecode

AVID PROJECT CONFIG

Format: 1920x1080 pixels
fps: 25p
Color Space: Rec.709

ADDITIONAL DELIVERABLES

Accompanying files for editorial along with
transcodes:

ALE's
Source Sound
DIT & Lab reports

END OF SHOOT DAY LOGISTIC

- All camera and sound rushes will be backed up to on-set storage (BACKUP + TEMPORARY + SHUTTLE DRIVE)
- Mags are ready to use after on-set offload
- All rushes to be processed and archived to LTO and RAID by dailies Lab every 24 hours
- All rushes to be transcoded for offline by dailies Lab
- On-Set storage safely stored
- 4 mags per camera is recommended to ensure smooth running of production

WORKFLOW CAPACITY

This workflow outline is designed for processing an approx. maximum of 120 minutes of rushes per day. Additional material may require additional operators and/or kit, or incur overtime.

MEDIA BACKUP & RE-USE

- 4 mags per camera is recommended to ensure smooth running of production
- Three copies of files on set (2 on RAID 5)
- Card safe to wipe after on-set offload with checksum

LIST OF EXPECTED FILES FROM DIT & DATA MANAGER

- Resolve project with frame line and 5% Resize with CDL and grades applied on timeline
- Offloads Reports
- QC notes from DIT or On-Set
- LUT (if present)
- CDL files (backup in case resolve project proves problematic)
- Reference stills with look applied, named with scene/shot online uploaded at the end of the shooting day.TBD (PERMISSIONS ACCORDING TO PRODUCTION)

END OF SHOOT DAY LOGISTIC

- All camera and sound rushes will be backed up to on-set storage (MASTER + TEMPORARY + SHUTTLE DRIVE)
- All rushes to be processed and archived to LTO, RAID by LAB every 24 hours
- Colored and audio synced transcodes by LAB to Editing dept.
- On-Set storage safely stored

[illegible]