



The Virtex-II Pro™ Development Kit from Avnet Design Services offers system level development on a highly advanced hardware platform. The Xilinx Virtex-II Pro family, based on the highly successful Virtex-II architecture, provides a unique environment for developing high-performance microprocessor and I/O intensive applications. The embedded 32-bit IBM PowerPC™ RISC processor delivers over 420 Dhrystone MIPS at 300 MHz, with a high-bandwidth interface to on-chip programmable logic. Additionally, Rocket I/O™ 3.125 Gbps transceivers support emerging connectivity standards. Time to market is greatly accelerated for implementation of advanced peripherals, IP and high-speed protocols such as 10 Gig Ethernet, Fibre Channel, OC-192 and InfiniBand.

The Xilinx Virtex-II Pro Development Kit includes:


- Virtex-II Pro development board with power supply daughtercard
 - User's guide
 - Bill of materials
 - Schematics
 - AC/DC power supply module
 - Custom serial cable
 - EDK example projects
 - CompactFlash card
 - Linux/PPC v2.4.20 kernel source tree with fully populated RAM disk
- Not included:
- XPAK module and holder
 - SFP modules


Target Applications:

- ▲ Packet switching
- ▲ Network security
- ▲ Storage area networks
- ▲ Servers and super computers
- ▲ Video computing/transmission
- ▲ High-speed serial interfaces
(RapidIO, FiberChannel and Hypertransport)

Features:

- ▲ FPGA
 - Xilinx Virtex-II Pro™ XC2VP7-FF896 or XC2VP20-FF896
- ▲ High-speed serial communication
 - Two HSSDC2 connectors (InfiniBand, user may replace with Fibre Channel)
 - Pads for an XPAK module (10Gb Ethernet, OC-192)
 - Receptacles for 2 SFP modules (Gigabit Ethernet, Fibre Channel, InfiniBand)
- ▲ Board I/O connectors
 - 32-bit PCI Mezzanine Card (PMC) connectors
 - Four 140-pin general purpose I/O expansion connectors (AvBus)
- ▲ Memory
 - Micron DDR SDRAM SODIMM (128MB expandable to 1GB)
 - Micron Mobile SDRAM (two 8Mbit x 16 devices, 32MB total)
 - Cypress asynchronous SRAM (512Kbit x 32, 2MB total)
 - Intel StrataFlash® (16MB total)
 - Compact FLASH card
- ▲ Communication
 - National 10/100/1000 MBit/s Ethernet PHY
 - RS-232 serial ports
- ▲ PCI
 - PCI bridge - Xilinx Spartan™-IIE XC2S300E-FG456 FPGA
 - Windows based GUI interface
 - Configuration or file transfer & system control
 - Universal PCI connector (32-bit or 64-bit slot compatible)
 - Support for both 3.3V and 5.0V PCI signaling
- ▲ Power
 - Power supply daughter card (+3.3V and +2.5V rails @ 14A total)
 - 50 Watt AC/DC +5.0V power supply
 - National linear regulators
- ▲ Configuration
 - Bridge (Spartan-IIE)
 - Xilinx PROM XC18V02-VQ44
 - In-system programmable PROM
 - Target (Virtex-II Pro)
 - Xilinx System ACE™ CF
 - FLASH or SRAM via PCI and Windows application

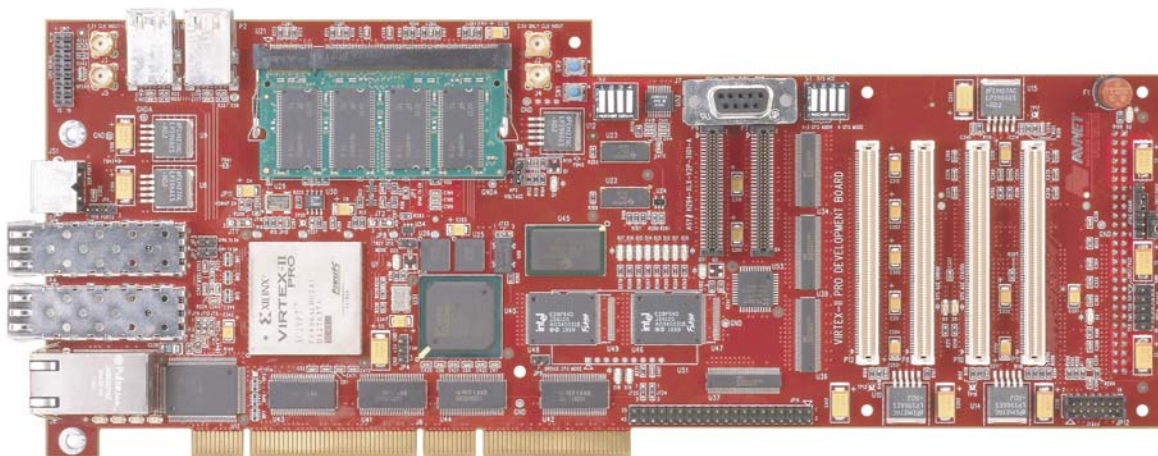

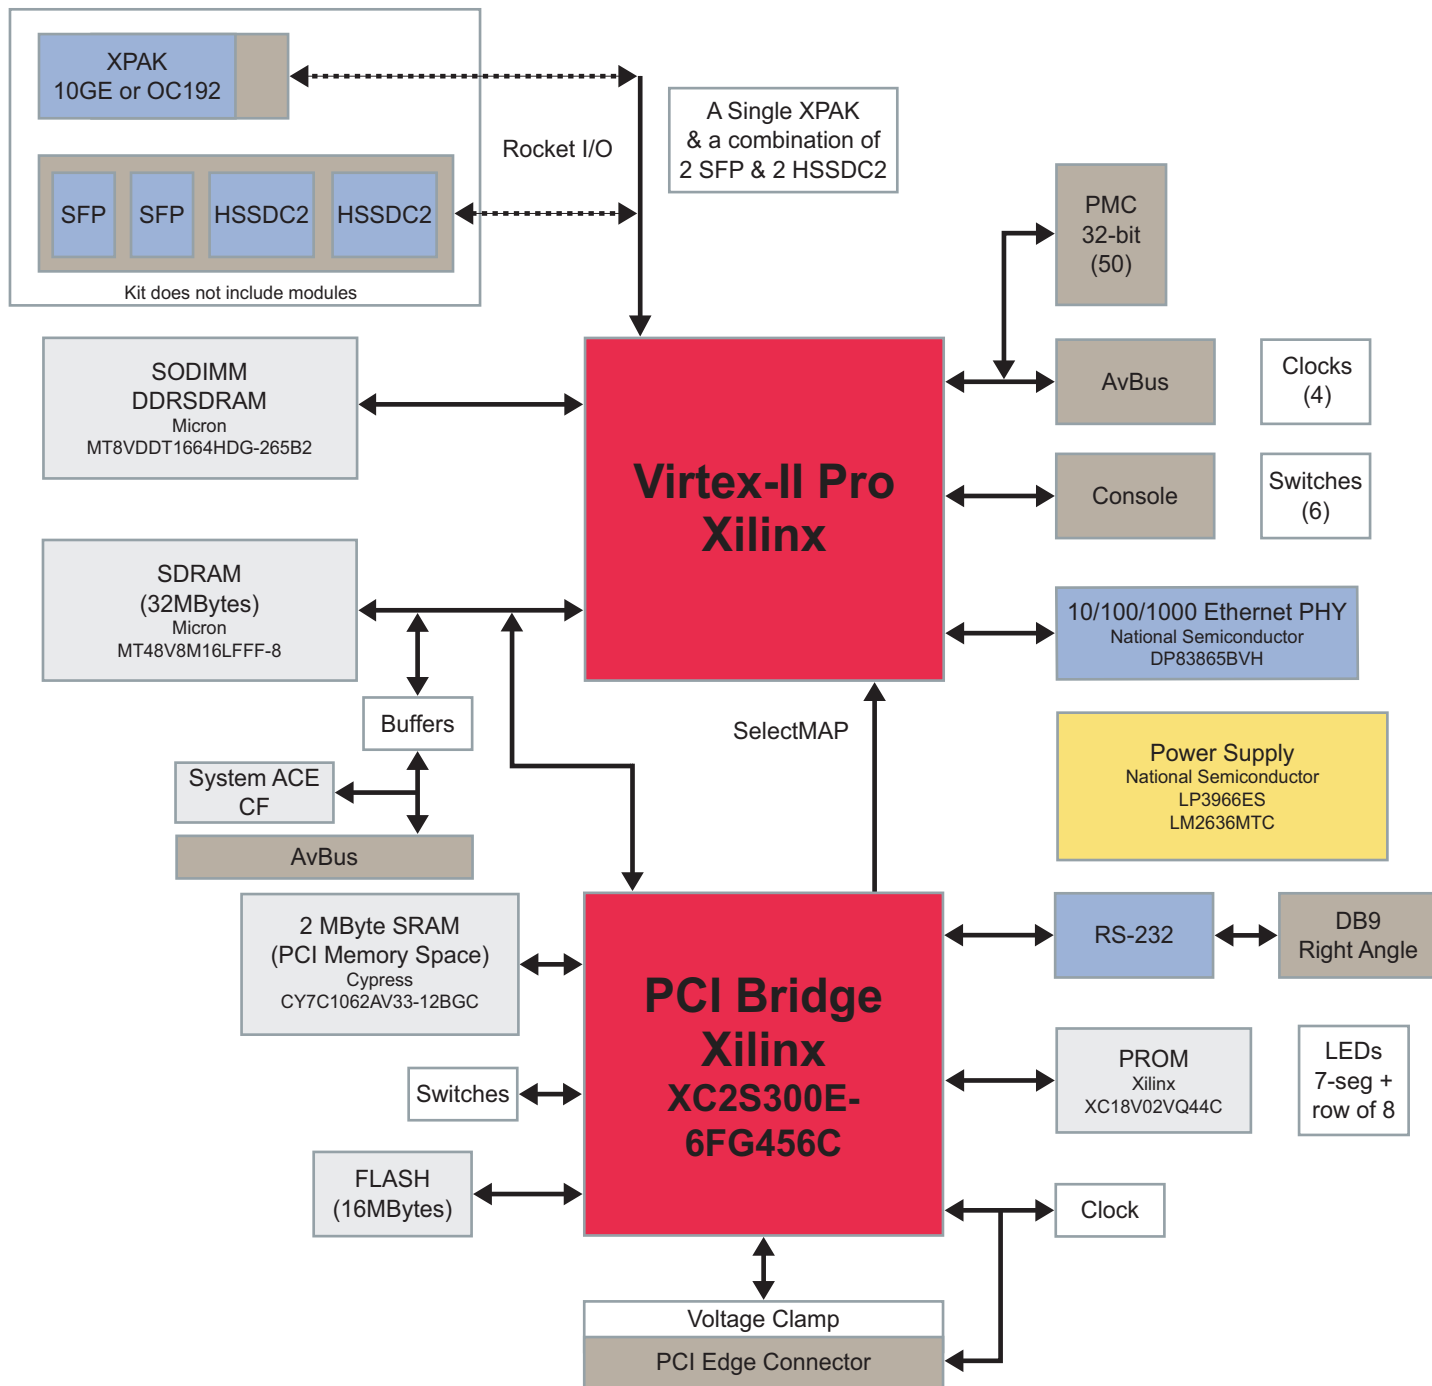

Supporting suppliers:



Ordering Information:

Part Number	Hardware	Resale
ADS-XLX-V2PRO-DEVP7-5	Xilinx Virtex-II Pro Development Kit with XC2VP7, -5 speed grade	\$1,995.00 USD
ADS-XLX-V2PRO-DEVP7-6	Xilinx Virtex-II Pro Development Kit with XC2VP7, -6 speed grade	\$2,495.00 USD
ADS-XLX-V2PRO-DEVP20-5	Xilinx Virtex-II Pro Development Kit with XC2VP20, -5 speed grade	\$2,995.00 USD

Contact Information:

North America
2211 South 47th St.
Phoenix, Arizona 85034
United States
Tel: +1 800 585 1602

Europe
Gruber Str. 60
85586 Poing
Germany
Tel: +49 (0) 8121 777279

Asia
7 Changi South St. 2
#01-00
Singapore, 486415
Tel: +6580 6000

www.ads.avnet.com

