

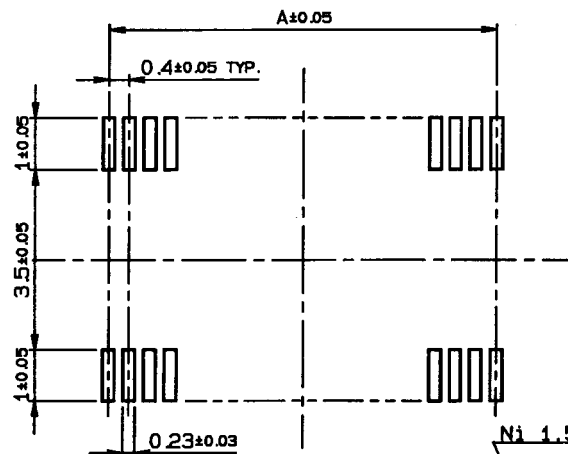
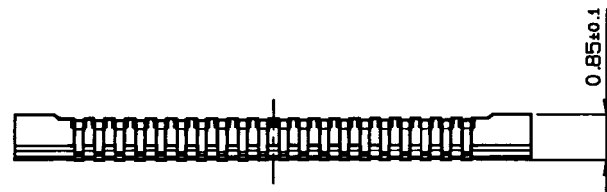



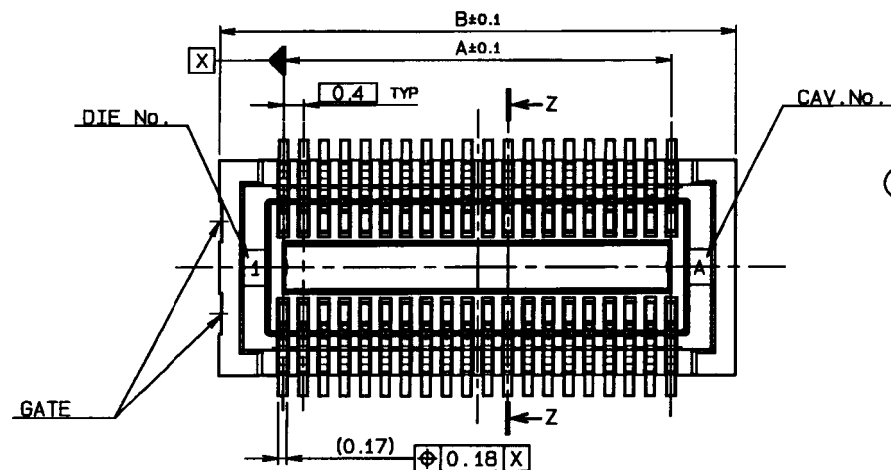


MOUNTING LAYOUT

PLATING (CONTACT)

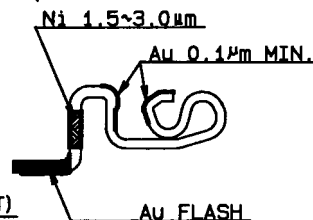

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	PA6T		COLOR: BLACK
2	CONTACT		N	Be-Cu		Au PLATING

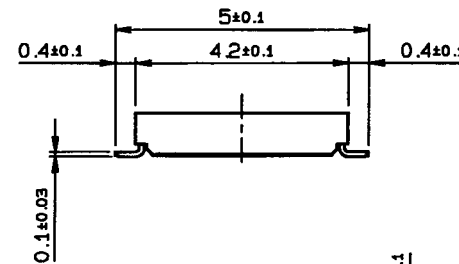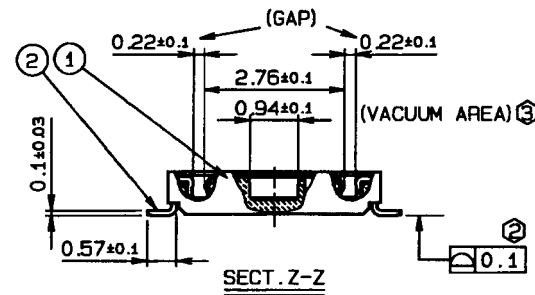

MATING CONDITION

管 数 NO. OF POS.	A	B	D
10	1.6	4.1	3.2
16	2.8	5.3	4.4
20	3.6	6.1	5.2
24	4.4	6.9	6.0
30	5.6	8.1	7.2
34	6.4	8.9	8.0
40	7.6	10.1	9.2
44	8.4	10.9	10.0
50	9.6	12.1	11.2
54	10.4	12.9	12.0
60	11.6	14.1	13.2
64	12.4	14.9	14.0
70	13.6	16.1	15.2
80	15.6	18.1	17.2

注 記
NOTE

1. 要 番

P/N 20 5805 XXX 000 829 +

管 数
NO. OF POS.

バリエーション
VARIATION


ANCHOR PLATE	BOSS	GUIDE POST
0	-	-

②: WITH - : WITHOUT


② テール及び金具底面の相互の平行度は、0.1mmMAX.
COPLANARITY OF CONTACT TAIL AND
ANCHOR PLATE IS 0.1mmMAX.

③ 凸凹面等
FLAT KEEPING AREA


TOLERANCE / 寸法 (S)		PRODUCT SPEC / 製品仕様					
X < 10	±0.2	UNIT	ANGLE	0	EDN-774	6-09-05	T. SASAKI
10 ≤ X < 30	±0.25	mm	3RD	NO.	EDN/DCN	DATE	H. TAGUCHI
30 ≤ X	±0.3	SCALE	DATE	ISSUE			
ANGLE / 角度	±3°	NYS	6-09-05	CHECKED			
DRAWN	DESIGNED	CHECKED	APPROVED	APPROVED			
LI	T. SASAKI	H. TAGUCHI	N. HAYASHI	PART NAME / 部品名			
KYOCERA ELCO CORPORATION				SERIES 5805 REC ASSY ST SMT WITHOUT BOSS			
				0.4mm PITCH BOARD TO BOARD H=1.0mm			
				PART NO. / 部品番号			
				20 5805 XXX 000 829 +			
				DRG NO. / 図番			
				BJS 5805013			
				SHEET REV			
				1/1 A			

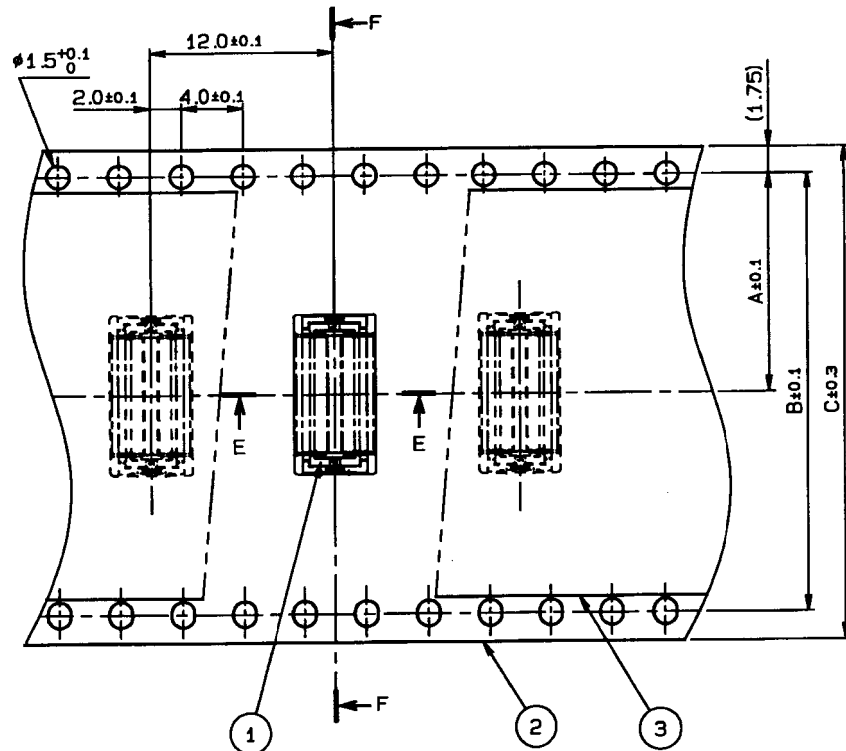

SECT. F-F



SECT. E-E (S-5/1)

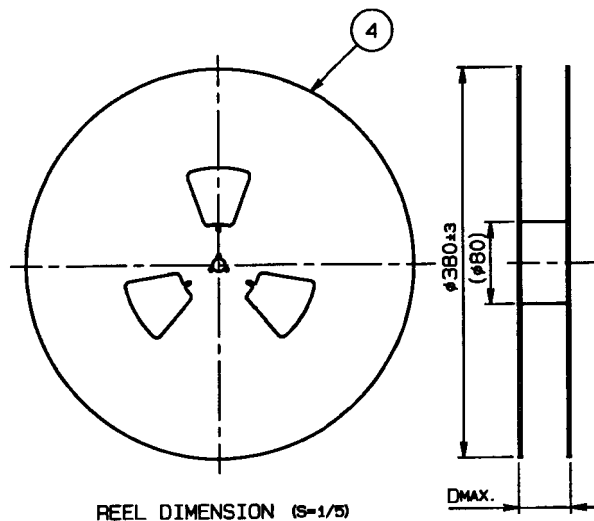


REEL DIMENSION (S-1/5)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	20 5805 XXX 00X 829 +	2000			
2	EMBOSS TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


数量 NO. OF POS.	A	B	C	D
10	5.5	-	12	18.4
16	7.5	-	16	22.4
20	7.5	-	16	22.4
24	7.5	-	16	22.4
26	7.5	-	16	22.4
30	7.5	-	16	22.4
34	11.5	-	24	30.4
40	11.5	-	24	30.4
44	11.5	-	24	30.4
50	11.5	-	24	30.4
54	11.5	-	24	30.4
60	11.5	-	24	30.4
64	11.5	-	24	30.4
70	11.5	-	24	30.4
80	14.2	28.4	32	38.4

注 記
NOTE

1. 梱包数量 : 2000 個/リール
PACKING QUANTITY : 2000 ea/reel
2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

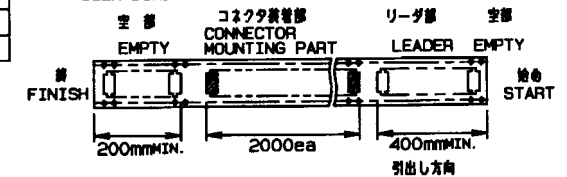

USER DIRECTION OF FEED

4. 型番
P/N 24 5805 XXX 00X 829 +

数量
NO. OF POS.
バリエーション
VARIATION

	ANCHOR PLATE	BOSS	GUIDE POST
0	-	-	-
1	-	●	-

●: WITH - : WITHOUT

TOLERANCE / 公差 (S)		PRODUCT SPEC / 製品仕様							
X <10 ±0.2									
10 ≤ X <30 ±0.25	UNIT	ANGLE		0 EDN-	6-17-05				
30 ≤ X ±0.3	mm	3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度		SCALE		PART NAME / 部名					
±3°	3/1	DATE		SERIES 5805 EMOSS TAPE ASSY					
		6-17-05		REC ASSY ST SMT WITHOUT ANCHORPLATE H=1.0					
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 部番	
T. SASAKI								24 5805 XXX 00X 829 +	
KYOCERA				DRG NO. / 図番				SHEET REV	
KYOCERA ELCO CORPORATION				BJS 5805016				1/1 0	