
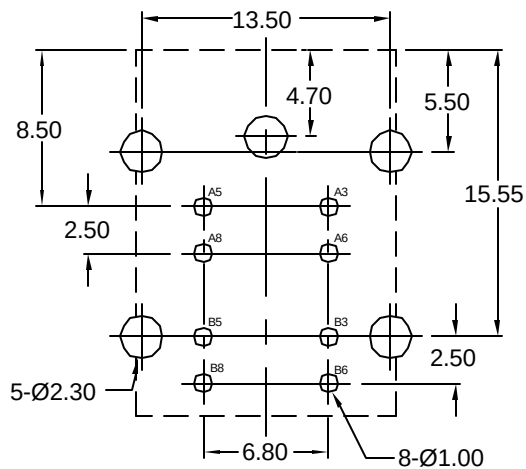
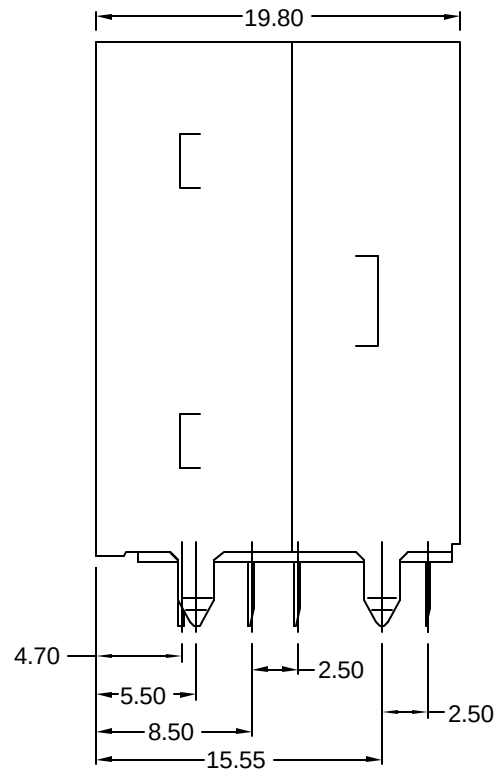
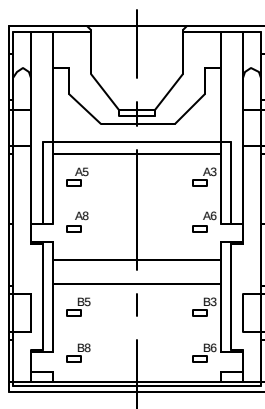


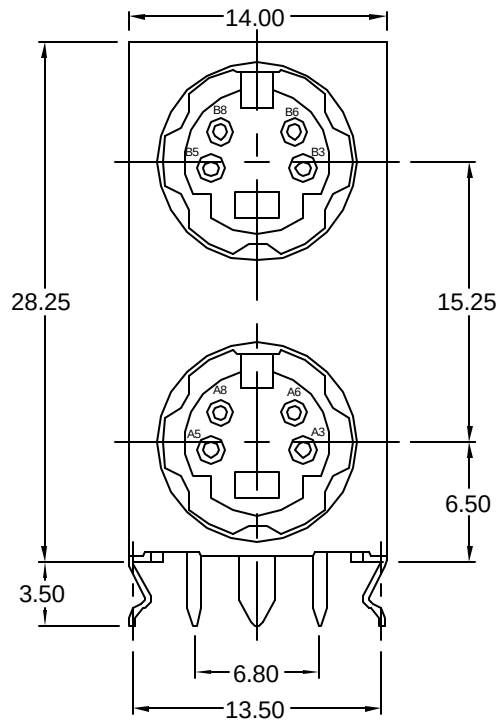

Recommended PCB Layout
(Bottom View)

Material and Finish

Body: PBT Thermoplastic,
UL94V-0 Rated, Black

Contacts: Phosphor Bronze

Contact Plating: Gold Flash
on Contacts, 120u" Tin
on Termination, all over
50u" min. Nickel

Shield: Brass,
120u" Tin Plated over
50u" min. Copper

Electrical Characteristics

Contact Resistance:

Before Test:
Plug to Terminals: 30 Milliohms Max.

After Test:
Plug to Terminals: 60 Milliohms Max.

Insulation Resistance:
500 Megohms Min.

Dielectric Withstanding Voltage:
500V AC RMS For 1 Minute

Current Rating:
1 Amp at 12V DC

Mechanical Characteristics

Durability Test: 500 Cycles Min.

Insertion Force: 4.5kg max.


Extraction Force: 0.4kg - 3.5kg

Operating Temperature: -25°C to +85°C



Tolerances	
X.X ± 0.25	
X.XX ± 0.15	
Unless Stated Otherwise	

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	9/6/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	8/02/05



KMDGX-4S/4S-S4N

Stacked Mini-Din, 4/4, RoHS Compliant

Fully Shielded, Gold Contacts

