
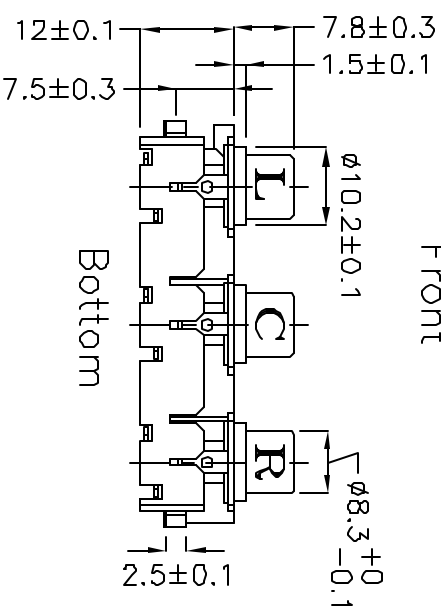
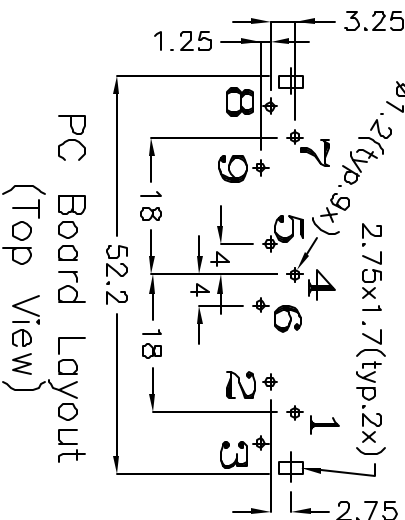



- Specifications:**
1. Insulation Resistance: 100MOhms min. (initial)
 2. Contact Resistance (initial): 30mOhm max at 100mA(max) 1KHz.
 3. Dielectric Withstand Voltage: AC 500V, 60Hz for 1 minute.
 4. Insertion Force: 3Kgs max.
 5. Humidity Test: 40±2, 90~95%, 48 hours.

- Custom Part Numbers:
1. The last part number in the "Color Index" is a custom part template.
 2. Match color number from "Color Chart" to the desired "Input" on the "Color Index."




Color Index						
Part No.	Input X ₁	Input X ₂	Input X ₃	Input X ₄	Input X ₅	Input X ₆
RCJ-61212121	Red	Black	Red	Black	Red	Black
RCJ-61343434	White	Yellow	White	Yellow	White	Yellow
RCJ-61232323	Red	White	Red	White	Red	White
RCJ-61223344	Red	Red	White	White	Yellow	Yellow
RCJ-61X ₁ X ₂ X ₃ X ₄ X ₅ X ₆	Color X ₁	Color X ₂	Color X ₃	Color X ₄	Color X ₅	Color X ₆

Example: {Black, Red, White, Yellow, Blue, Green}
 $RCJ-61X_1 X_2 X_3 X_4 X_5 X_6 = RCJ-61123456$

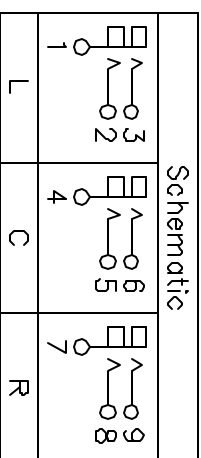

6	Input	PBT	6	See Color Index
5	Cover	ABS	3	Black Color
4	Base	ABS	1	Black Color
3	Terminal T	0.5t Brass	3	Silver Plated
2	Terminal D	0.5t Brass	3	Silver Plated
1	Earth Terminal (Barrel)	0.5t Brass	3	Nickel Plated
No.	Description	Material	Qty	Finish

**8615 SW Allen, Suite 103
Beaverton, OR 97006
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com**



TITLE: RCA Jack, 6 port, 2x3, Right Angle, PCB Mount

PART NO.	RCJ-61XXXXXX	UNITS:	Millimeters
----------	--------------	--------	-------------

二、

SCALE: