




XC3S5000-FG900XC3S5000-FG900

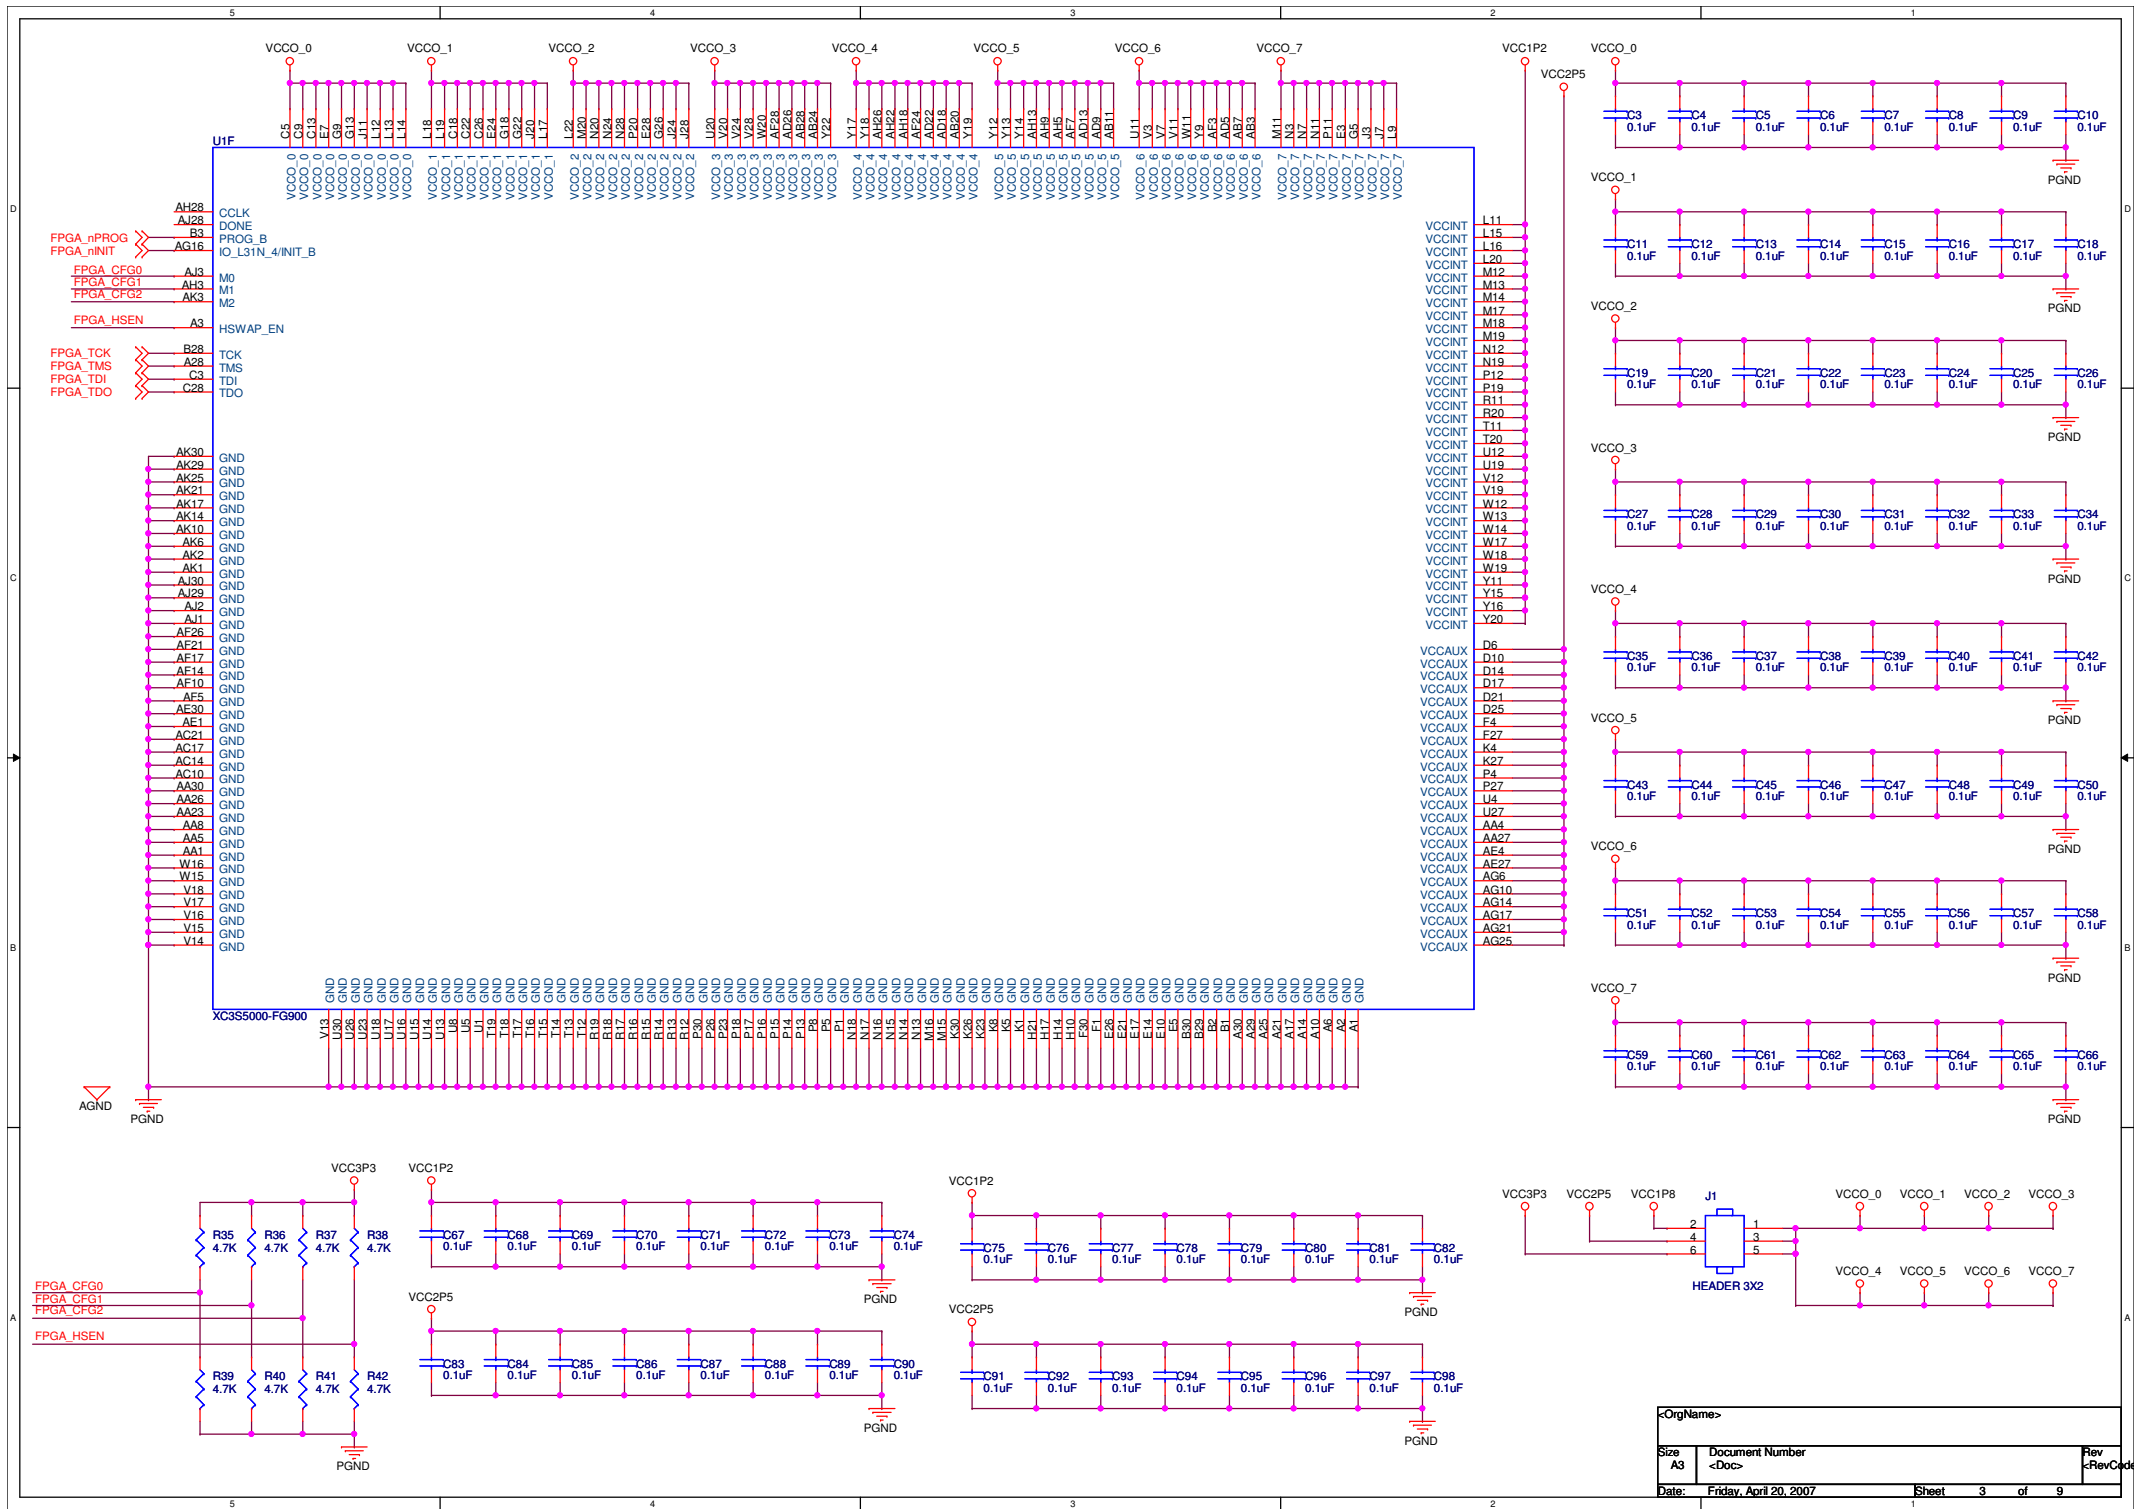



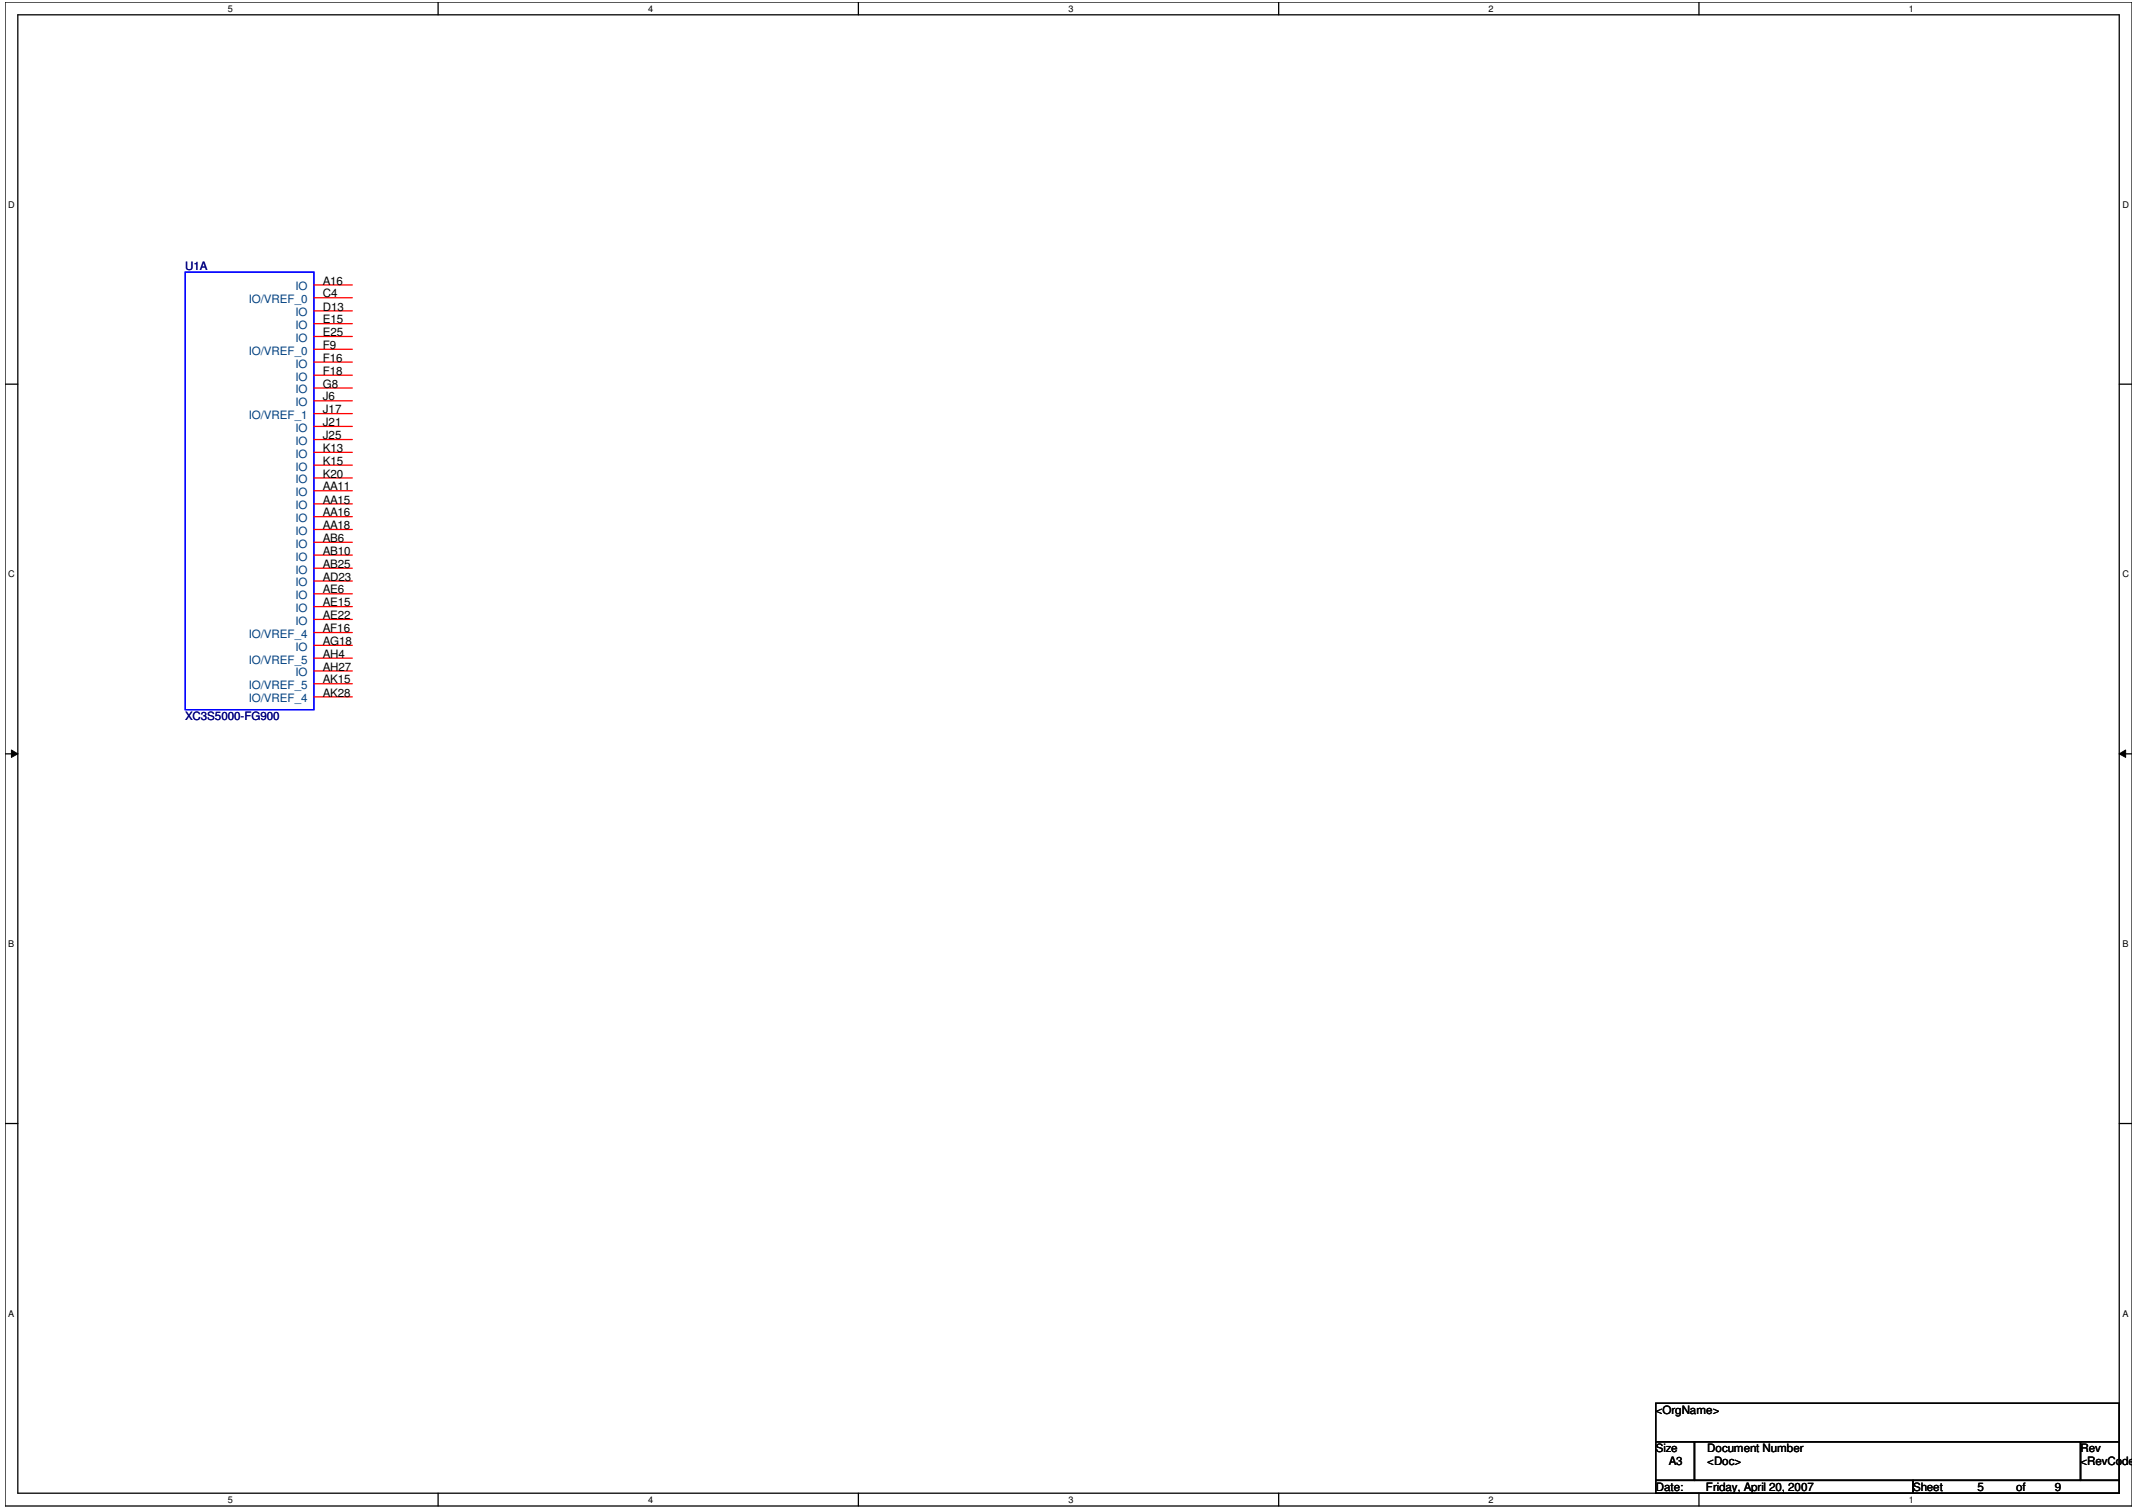

U1A

	IO	A16
		C4
IOVREF_0		D13
IO		E15
IO		E25
IO		F9
IOVREF_0		F16
IO		F18
IO		G8
IO		J6
IOVREF_1		J17
IO		J21
IO		J25
IO		K13
IO		K15
IO		K20
IO		AA11
IO		AA15
IO		AA16
IO		AA18
IO		AB6
IO		AB10
IO		AB25
IO		AD23
IO		AE6
IO		AE15
IO		AE22
IOVREF_4		AF16
IO		AG18
IOVREF_5		AH4
IO		AH27
IOVREF_5		AK15
IOVREF_4		AK28

XC3S5000-FG900

CON6

VCC3P3

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40

PGND

PGND

HEADER 20x2



NF_D00 NF_D01 NF_D02 NF_D03 NF_D04 NF_D05 NF_D06 NF_D07

NF_D08 NF_D09 NF_D10 NF_D11 NF_D12 NF_D13 NF_D14 NF_D15

NF_CLE NF_ALE NF_nRE NF_RnB NF_nWP NF_nCE0 NF_nCE1 NF_nCE2 NF_nCE3 NF_nCE4 NF_nCE6 NF_nCE7

Diagram illustrating the pinout for the CON7 connector, showing connections to VCC3P3, GND, and various NF (NAND Flash) signals.

Pin	Signal
1	GND
2	VCC3P3
3	VCC3P3
4	VCC3P3
5	NF_D00
6	NF_D01
7	NF_D02
8	NF_D03
9	NF_D04
10	NF_D05
11	NF_D06
12	NF_D07
13	NF_D08
14	NF_D09
15	NF_D10
16	NF_D11
17	NF_D12
18	NF_D13
19	NF_D14
20	NF_D15
21	NF_CLE
22	NF_ALE
23	NF_nRE
24	NF_nWE
25	NF_nRb
26	NF_nWp
27	NF_nCE0
28	NF_nCE1
29	NF_nCE2
30	NF_nCE3
31	NF_nCE4
32	NF_nCE5
33	NF_nCE6
34	NF_nCE7
35	NF_nCE8
36	NF_nCE9
37	NF_nCE10
38	NF_nCE11
39	GND
40	GND

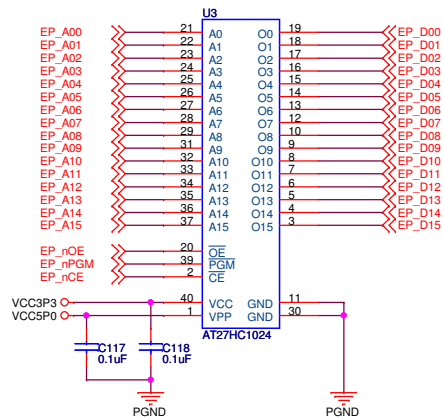

MAIN RESET

